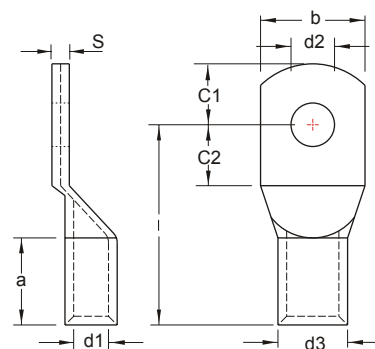


NON-INSULATED COPPER TUBULAR LUGS (TLK SERIES)


MAXIMUM ELECTRIC CURRENT:

A.W.G.	8	6	4	2
AMP.	70	95	125	170

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION mm									CRIMPING TOOL	Q'TY BOX	
		a	b	C1	C2	d1	d2	d3	I	S			
8 A.W.G. 10 mm ²	TLK10-4	10.0	12.0	7.5	7.5	4.6	4.3	7.0	21.0	1.8	K.S. MODEL LY-2045D WITH DIE INDEX NO:8	500	
	TLK10-5			6.5			5.5		22.0			500	
	TLK10-6						6.4					500	
	TLK10-8		15.0	10.0	10.0		8.4		25.0	1.5		500	
	TLK10-10		17.0	12.0	12.0		10.5		27.0	1.3		500	
	TLK10-12		19.0	13.0	13.0		13.0		29.0	1.1		500	
6 A.W.G. 16 mm ²	TLK16-5	13.0	12.0	5.5	6.5	5.5	5.5	8.5	26.0	2.8	NOVOPRESS MODEL HPM400	250	
	TLK16-6			6.25	7.5		6.4		27.0			250	
	TLK16-8		15.0	8.5	9.5		5.5		8.4	29.0		2.1	250
	TLK16-10		17.0	10.5	11.5		10.5		31.0	2.0		250	
	TLK16-12		19.0	12.0	13.0		13.0		33.0	1.5		250	
4 A.W.G. 25 mm ²	TLK25-5	15.0	14.0	7.5	7.5	7.0	5.5	10.0	30.0	2.8	NOVOPRESS MODEL HPM400	200	
	TLK25-6			10.0	6.4		32.0					200	
	TLK25-8		16.0		10.0				10.0	8.4		34.0	2.4
	TLK25-10		18.0	12.0	12.0		10.5		35.0	2.2		200	
	TLK25-12		19.0	13.0	13.0		13.0		38.0	2.1		200	
	TLK25-14		21.0	14.5	14.5		15.0			1.9		200	
2 A.W.G. 35 mm ²	TLK35-6	17.0	17.0	7.5	7.5	8.5	6.4	12.0	32.0	3.2	NOVOPRESS MODEL HPM400	100	
	TLK35-8			10.0	10.0		8.4		34.0			100	
	TLK35-10		19.0	12.0	12.0		10.5		37.0	2.9		100	
	TLK35-12		21.0	13.0	13.0		13.0		40.0	2.6		100	
	TLK35-14			14.5	14.5		15.0		42.0			100	
	TLK35-16			26.0	16.0		16.0		17.0			2.2	100

(UL) (UL) ALL LISTED