



7207 BECBPH

Single row angular contact ball bearing

These single row angular contact ball bearings can accommodate radial and axial loads acting simultaneously, where the axial load acts in one direction only. They can operate at high speeds and, depending on the variant, even very high speeds. They are more suitable than deep groove ball bearings for supporting large axial forces acting in one direction.

- High-speed capability
- Accommodate relatively high radial loads and large unilateral axial loads

Overview

Dimensions

| | |
|------------------|-------|
| Bore diameter | 35 mm |
| Contact angle | 40 ° |
| Outside diameter | 72 mm |
| Width | 17 mm |

Performance

| | |
|---------------------------|--------------|
| Basic dynamic load rating | 31 kN |
| Basic static load rating | 20.8 kN |
| Limiting speed | 12 000 r/min |
| Reference speed | 11 000 r/min |
| SKF performance class | SKF Explorer |


Properties

| | |
|--------------------------------------|------------------------------------|
| Axial internal clearance | Not applicable |
| Cage | Non-metallic |
| Coating | Without |
| Contact type | Normal contact (two-point contact) |
| Locating feature, bearing outer ring | None |
| Lubricant | None |
| Matched arrangement | No |
| Material, bearing | Bearing steel |
| Number of rows | 1 |
| Relubrication feature | Without |
| Ring type | One-piece inner and outer rings |
| Sealing | Without |
| Universal matching bearing | Yes |

Technical Specification

SKF performance class


SKF Explorer

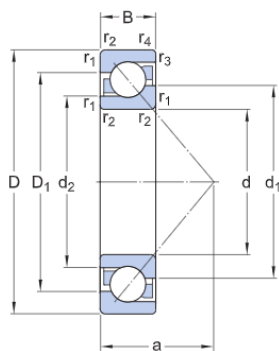

Dimensions

| | | |
|------------------|-------------|---|
| d | 35 mm | Bore diameter |
| D | 72 mm | Outside diameter |
| B | 17 mm | Width |
| d ₁ | ≈ 49.65 mm | Shoulder diameter of inner ring (large side face) |
| d ₂ | ≈ 41.96 mm | Shoulder diameter of inner ring (small side face) |
| D ₁ | ≈ 58.25 mm | Shoulder diameter of outer ring (large side face) |
| a | 31 mm | Distance side face to pressure point |
| r _{1,2} | min. 1.1 mm | Chamfer dimension |
| r _{3,4} | min. 0.6 mm | Chamfer dimension |

Abutment dimensions

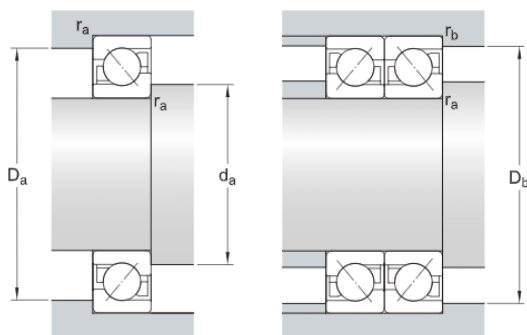

| | | |
|----------------|--------------|------------------------------|
| d _a | min. 42 mm | Diameter of shaft abutment |
| D _a | max. 65 mm | Abutment diameter housing |
| D _b | max. 67.8 mm | Diameter of housing abutment |
| r _a | max. 1 mm | Radius of fillet |
| r _b | max. 0.6 mm | Radius of fillet |

Calculation data

| | | |
|----------------------------|----------------|--------------|
| Basic dynamic load rating | C | 31 kN |
| Basic static load rating | C ₀ | 20.8 kN |
| Fatigue load limit | P _u | 0.88 kN |
| Reference speed | | 11 000 r/min |
| Limiting speed | | 12 000 r/min |
| Minimum axial load factor | A | 0.00674 |
| Minimum radial load factor | k _r | 0.095 |
| Limiting value | e | 1.14 |

Single bearing or bearing pair arranged in tandem

| | | |
|-------------------------------------|----------------|------|
| Calculation factor (single, tandem) | X | 0.35 |
| Calculation factor (single, tandem) | Y ₀ | 0.26 |
| Calculation factor (single, tandem) | Y ₂ | 0.57 |

Bearing pair arranged back-to-back or face-to-face

| | | |
|---|----------------|------|
| Calculation factor (back-to-back, face-to-face) | X | 0.57 |
| Calculation factor (back-to-back, face-to-face) | Y ₀ | 0.52 |
| Calculation factor (back-to-back, face-to-face) | Y ₁ | 0.55 |
| Calculation factor (back-to-back, face-to-face) | Y ₂ | 0.93 |

Mass

| | |
|------|---------|
| Mass | 0.28 kg |
|------|---------|