

## 1/4" Dr. Bit Socket, Pozidrive

1/4"



• Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
21401	#1	36.5	12	-	-
21402	#2	36.5	12	-	-
21403	#3	36.5	12	-	-

▲ These bit sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.

## 1/4" Dr. Bit Socket, Slotted

1/4"




• Bit made from S2 material for durability and anti-slipping

No.	Spec. (mm)	L(mm)			
21501	4.0	36.5	12	-	-
21502	5.5	36.5	12	-	-
21503	6.5	36.5	12	-	-

▲ These bit sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.

## 3/8" Dr. Bit Socket, Torx®

3/8"

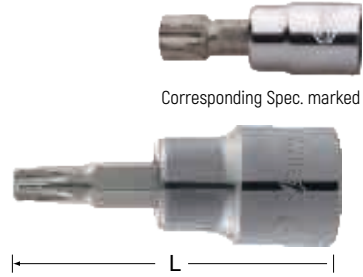

Corresponding Spec. marked with \*




• Bit made from S2 material for durability and anti-slipping

No.	Spec.	L(mm)			
22101	T-10	48	6	-	-
22102	T-15	48	6	-	-
22103	T-20	48	6	-	-
22104	T-25	48	6	-	-
22105	T-27	48	6	-	-
22106	T-30	48	6	-	-
22107	T-40	48	6	-	-
22108	T-45	48	6	-	-
22109	T-50	48	6	-	-
22110*	T-55	48	6	-	-
22111*	T-60	48	6	-	-

▲ These bit sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.

## 3/8" Dr. Bit Socket, Hexagon

3/8"

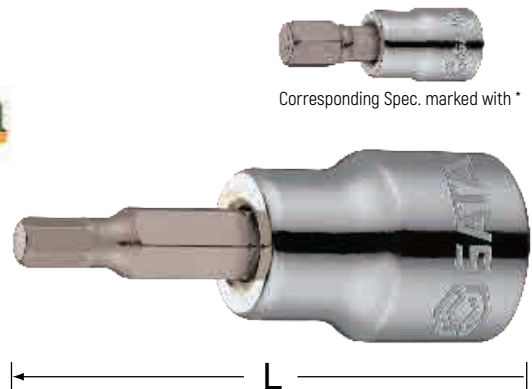

Corresponding Spec. marked with \*



• Bit made from S2 material for durability and anti-slipping

No.	Spec. (mm)	L(mm)			
22201	3	48	6	-	-
22202	4	48	6	-	-
22203	5	48	6	-	-
22204	6	48	6	-	-
22205*	7	48	6	-	-
22206*	8	48	6	-	-
22207*	10	48	6	-	-

▲ These bit sockets should never be used on power drivers, pneumatic impact wrench and/or extenders.

