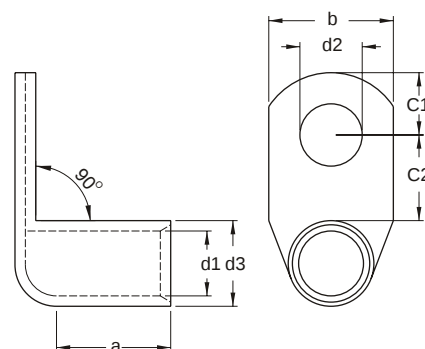


NON-INSULATED COPPER TUBULAR LUGS (TLK-90D SERIES)


MAXIMUM ELECTRIC CURRENT:

A.W.G.	2	1/0	2/0	3/0
AMP.	170	230	265	310

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION mm							CRIMPING TOOL	Q'TY BOX
		a	b	C1	C2	d1	d2	d3		
2 A.W.G. 35 mm ²	TLK35-10-90D	17.0	19.0	12.0	15.0	8.5	10.5	12.0	NOVOPRESS MODEL HPM400	200
	TLK35-12-90D *		21.0	13.0	18.0		13.0			200
	TLK35-14-90D *			14.5	20.0		15.0			200
	TLK35-16-90D *			16.0	22.0		17.0			200
1/0 A.W.G. 50 mm ²	TLK50-6-90D	19.0	20.0	10.0	13.0	10.0	6.4	14.0	NOVOPRESS MODEL HPM400	100
	TLK50-8-90D			12.0	16.0		8.4			100
	TLK50-10-90D			13.0	18.0		10.5			100
	TLK50-12-90D *		23.0	13.0	18.0		13.0			100
	TLK50-14-90D *			14.5	20.0		15.0			100
	TLK50-16-90D *			16.0	22.0		17.0			100
	TLK50-20-90D *			19.0	24.0		21.0			100
2/0 A.W.G. 70 mm ²	TLK70-6-90D	21.0	23.0	10.0	13.0	12.0	6.4	16.5	NOVOPRESS MODEL HPM400	50
	TLK70-8-90D			14.0	18.0		8.4			50
	TLK70-10-90D			12.0	16.0		10.5			50
	TLK70-12-90D		28.0	13.0	18.0		13.0			50
	TLK70-14-90D *			14.5	20.0		15.0			50
	TLK70-16-90D *			16.0	22.0		17.0			50
	TLK70-20-90D *			19.0	24.0		21.0			50
3/0 A.W.G. 95 mm ²	TLK95-8-90D	25.0	26.0	12.0	14.0	13.5	8.4	18.0	NOVOPRESS MODEL HPM400	50
	TLK95-10-90D			17.0	18.0		10.5			50
	TLK95-12-90D			13.0	18.0		13.0			50
	TLK95-14-90D *			14.5	20.0		15.0			50
	TLK95-16-90D *		28.0	16.0	22.0		17.0			50
	TLK95-20-90D *		36.0	22.0	24.0		21.0			50

* : DEVELOPING ON DEMAND