


NON-INSULATED COPPER TUBULAR LUGS (TLK-90D SERIES)

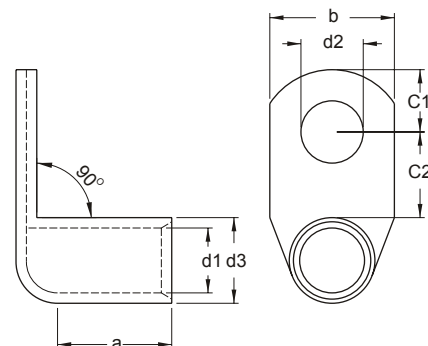

MAXIMUM ELECTRIC CURRENT:

A.W.G.	14	12	10	8	6	4	2
AMP.	30	35	50	70	95	125	170

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION mm							CRIMPING TOOL	Q'TY BOX
		a	b	C1	C2	d1	d2	d3		
12-14 A.W.G. 2.5 mm ²	TLK2.5-4-90D	7.0	8.5	5.8	7.0	2.4	4.3	4.4	NOVOPRESS MODEL HPM400	500
12-10 A.W.G. 6 mm ²	TLK6-4-90D	9.0	10.0	7.5	9.0	3.5	4.3	6.5	NOVOPRESS MODEL HPM400	500
	TLK6-5-90D						5.5			500
	TLK6-6-90D		12.0	10.0	6.4		500			
	TLK6-8-90D		14.0	10.0	8.4		500			
	TLK6-10-90D ※		17.0	12.0	15.0		10.5			500
	TLK6-12-90D ※		19.0	13.0	17.0		13.0			500
8 A.W.G. 10 mm ²	TLK10-5-90D	10.0	12.0	6.5	10.0	4.5	5.5	7.0	NOVOPRESS MODEL HPM400	500
	TLK10-6-90D						6.4			500
	TLK10-8-90D		15.0	10.0	13.0		8.4			500
	TLK10-10-90D ※		17.0	12.0	15.0		10.5			500
	TLK10-12-90D ※		19.0	13.0	18.0		13.0			500
6 A.W.G. 16 mm ²	TLK16-5-90D	13.0	12.0	7.5	10.0	5.5	5.5	8.5	NOVOPRESS MODEL HPM400	250
	TLK16-6-90D				11.0		6.4			250
	TLK16-8-90D		15.0	10.0	13.0		8.4			250
	TLK16-10-90D ※		17.0	12.0	15.0		10.5			250
	TLK16-12-90D ※		19.0	13.0	18.0		13.0			250
4 A.W.G. 25 mm ²	TLK25-5-90D	15.0	14.0	7.5	11.0	7.0	5.5	10.0	NOVOPRESS MODEL HPM400	200
	TLK25-6-90D						6.4			200
	TLK25-8-90D		16.0	10.0	13.0		8.4			200
	TLK25-10-90D		18.0	12.0	15.0		10.5			200
	TLK25-12-90D		19.0	13.0	18.0		13.0			200
	TLK25-14-90D ※		21.0	14.5	20.0		15.0			200
2 A.W.G. 35 mm ²	TLK35-6-90D	17.0	17.0	7.5	11.0	8.5	6.4	12.0	NOVOPRESS MODEL HPM400	200
	TLK35-8-90D			10.0	13.0		8.4			200

* DEVELOPING ON DEMAND