7412 BM

Single row angular contact ball bearing

These single row angular contact ball bearings can accommodate radial and axial loads acting simultaneously, where the axial load acts in one direction only. They can operate at high speeds and, depending on the variant, even very high speeds. They are more suitable than deep groove ball bearings for supporting large axial forces acting in one direction.

- High-speed capability
- Accommodate relatively high radial loads and large unilateral axial loads

Overview

Dimensions

Bore diameter	2.362 in
Outside diameter	5.906 in
Width	1.378 in

Performance

Basic dynamic load rating	26 752 lbf
Basic static load rating	19 446 lbf
Limiting speed	7 500 r/min
Reference speed	5 600 r/min

Properties

Axial internal clearance	Not applicable
Cage	Machined metal
Coating	Without
Contact type	Normal contact (two-point contact)
Locating feature, bearing outer ring	None
Lubricant	None
Matched arrangement	No
Material, bearing	Bearing steel
Number of rows	1
Relubrication feature	Without
Ring type	One-piece inner and outer rings
Sealing	Without

Technical Specification

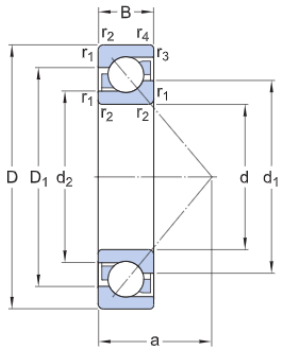

Dimensions

d	2.362 in	Bore diameter
D	5.906 in	Outside diameter
B	1.378 in	Width
d_1	≈ 3.746 in	Shoulder diameter of inner ring (large side face)
d_2	≈ 3.069 in	Shoulder diameter of inner ring (small side face)
D_1	≈ 4.585 in	Shoulder diameter of outer ring (large side face)
a	2.441 in	Distance side face to pressure point
$r_{1,2}$	min. 0.083 in	Chamfer dimension
$r_{3,4}$	min. 0.083 in	Chamfer dimension

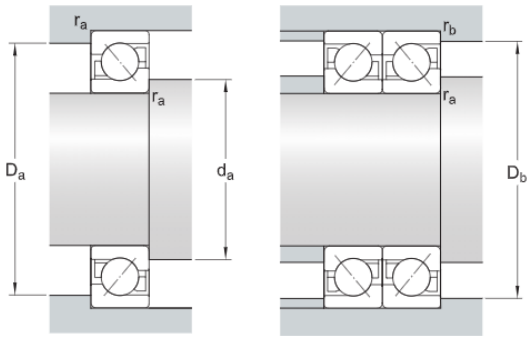

Abutment dimensions

d_a	min. 2.165 in	Diameter of shaft abutment
D_a	max. 4.331 in	Abutment diameter housing
D_b	max. 5.331 in	Diameter of housing abutment
r_a	max. 0.079 in	Radius of fillet
r_b	max. 0.079 in	Radius of fillet

Calculation data

Basic dynamic load rating	C	26 752 lbf
Basic static load rating	C_0	19 446 lbf
Fatigue load limit	P_u	798 lbf
Reference speed		5 600 r/min

Limiting speed		7 500 r/min
Minimum axial load factor	A	0.144
Minimum radial load factor	k_r	0.1
Limiting value	e	1.14

Single bearing or bearing pair arranged in tandem

Calculation factor (single, tandem)	X	0.35
Calculation factor (single, tandem)	Y_0	0.26
Calculation factor (single, tandem)	Y_2	0.57

Bearing pair arranged back-to-back or face-to-face

Calculation factor (back-to-back, face-to-face)	X	0.57
Calculation factor (back-to-back, face-to-face)	Y_0	0.52
Calculation factor (back-to-back, face-to-face)	Y_1	0.55
Calculation factor (back-to-back, face-to-face)	Y_2	0.93

Mass

Mass	7.275 lb

Terms and conditions

By accessing and using this website / app owned and published by AB SKF (publ.) (556007-3495 · Gothenburg) ("SKF"), you agree to the following terms and conditions:

Warranty Disclaimer and Limitation of Liability

Although every care has been taken to assure the accuracy of the information on this website / app, SKF provides this information "AS IS" and DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. You acknowledge that your use of this website / app is at your sole risk, that you assume full responsibility for all costs associated with use of this website / app, and that SKF shall not be liable for any direct, incidental, consequential, or indirect damages of any kind arising out of your access to, or use of the information or software made available on this website / app. Any warranties and representations in this website / app for SKF products or services that you purchase or use will be subject to the agreed upon terms and conditions in the contract for such product or service. Further, for non-SKF websites / apps that are referenced in our website / app or where a hyperlink appears, SKF makes no warranties concerning the accuracy or reliability of the information in these websites / apps and assumes no responsibility for material created or published by third parties contained therein. In addition, SKF does not warrant that this website / app or these other linked websites / apps are free from viruses or other harmful elements.

Copyright

Trademarks and Patents

All trademarks, brand names, and corporate logos displayed on the website / app are the property of SKF or its licensors, and may not be used in any way without prior written approval by SKF. All licensed trademarks published on this website / app reference the licensor that has granted SKF the right to use the trademark. Access to this website / app does not grant to the user any license under any patents owned by or licensed to SKF.

Changes

SKF reserves the right to make changes or additions to this website / app at any time.