


### 3/8" Dr. Adjustable Torque Wrench

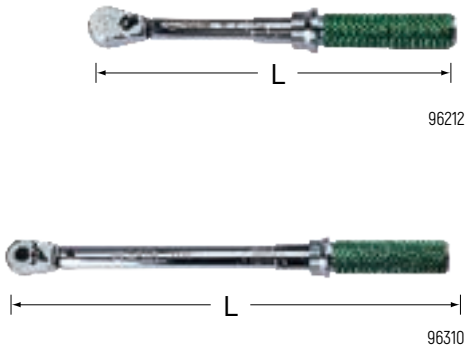


- New drop-shaped ratchet for operation with one hand
- Positive accuracy +/-3%
- Aluminum alloy knurled handle, effectively prevent skidding
- Pull-down locking structure, facilitating torque adjustment

No.	Torsion Range(Nm)	Driving Head	L(mm)	Indexing (N-m)			
96212	5-25	3/8"	268	0.1	-	6	10.2
96310	10-50	3/8"	426	0.5	-	10	17.2

▲ Note: When the torque exceeds the specified range, the measured torque can only be used for reference, and the forward +/-3% accuracy cannot be guaranteed. The torque wrench is a precision instrument and is not covered by SATA lifetime warranty. Please refer to the instructions for detailed instructions on how to use the products and services.

### 1/2" Dr. Adjustable Torque Wrench

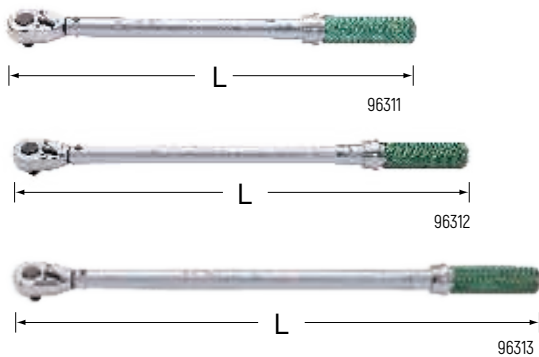


- New drop-shaped ratchet for operation with one hand
- Positive accuracy +/-3%
- Aluminum alloy knurled handle, effectively prevent skidding
- Pull-down locking structure, facilitating torque adjustment

No.	Torsion Range(Nm)	Driving Head	L(mm)	Indexing(N-m)			
96311	20-100	1/2"	473	0.5	-	10	17.2
96312	40-200	1/2"	555	1	-	10	18.9
96313	68-340	1/2"	616	2	-	10	21.8

▲ Note: When the torque exceeds the specified range, the measured torque can only be used for reference, and the forward +/-3% accuracy cannot be guaranteed. The torque wrench is a precision instrument and is not covered by SATA lifetime warranty. Please refer to the instructions for detailed instructions on how to use the products and services.

### 3/4" Dr. Adjustable Torque Wrench

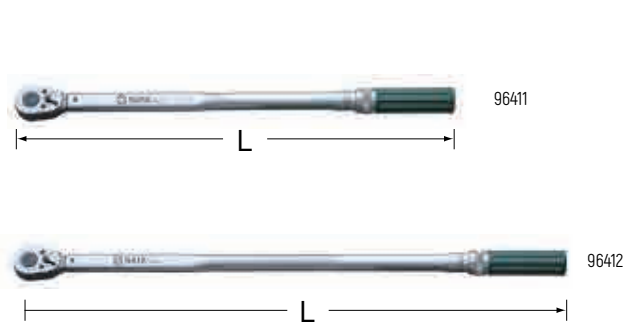

- Product subjected to adjustment and test before delivery +/-3% clockwise accuracy guaranteed

No.	Torsion Range(Nm)	Driving Head	L(mm)	Indexing(N-m)			
96411	110-550	3/4"	864	2.5	-	1	6.7
96412	160-800	3/4"	1075	2.5	-	1	7.3

▲ Note: When the torque exceeds the specified range, the measured torque can only be used for reference, and the forward +/-3% accuracy cannot be guaranteed. The torque wrench is a precision instrument and is not covered by SATA lifetime warranty. Please refer to the instructions for detailed instructions on how to use the products and services.

### 1" Dr. Adjustable Torque Wrench



- Imported with original packaging from Italy
- Driving head can be pushed up for reverse operation
- Handle with open-welded structure, facilitating adjustment, calibration and maintenance
- Torque accuracy +/-4%
- Applicable for large equipment installation and maintenance in such fields as machinery manufacturing, rail transit, petrochemical, metallurgy and other industries

No.	Driving Head (in.)	Torsion Range (N.m)	Torsion Range (lbf.ft)	Total Length (mm)	Indexing (N-m)	Weight (kg)			
96431	1"	200-1000	150-750	1030	25	9.7	-	1	13.8
96433	1"	500-2000	350-1500	1400	50	18	-	1	22.8

