



VDE Torx® Wrench

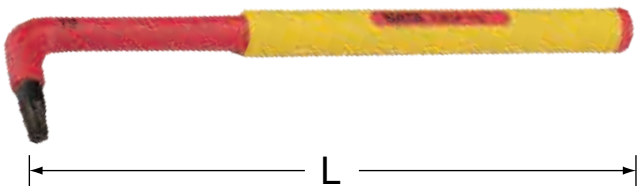

- Certified by VDE and tested to 10,000 volts, meeting IEC/EN 60900 standard
- Made of S2 material and subjected to heat treatment
- Blackened surface for high rust protection

No.	Spec.	L(mm)			
84801	T10	134	20	200	4
84802	T15	134	20	200	4
84803	T20	170	10	200	12.5
84804	T25	170	10	200	12.5
84805	T27	170	10	200	12.6
84806	T30	170	10	240	13.9
84807	T40	215	10	120	20.2
84808	T45	215	10	160	26.9
84809	T50	215	10	80	13.9

96610 1/4" Dr. Insulated Torque Wrench 5-25N.m

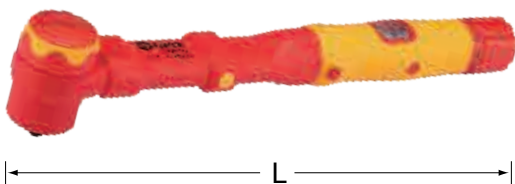


- Tested to 10,000 volts, meeting IEC/EN 60900 standard
- Forward torque accuracy: +/-4%

No.	Spec. (Nm)	L(mm)			
96610	5-25	285	1	12	6.5

▲ Warranty of 6 months (except for the insulating layer)

3/8" Dr. VDE Torque Wrench



- Tested to 10,000 volts, meeting IEC/EN 60900 standard
- Forward torque accuracy: +/-4%

No.	Spec. (Nm)	L(mm)			
96611	5-25	285	1	12	6.5
96612	10-50	285	1	12	6.5
96614	20-100	390	1	12	15

▲ Warranty of 6 months (except for the insulating layer)

1/2" Dr. Insulated Torque Wrench



- Tested to 10,000 volts, meeting IEC/EN 60900 standard
- Forward torque accuracy: +/-4%

No.	Spec. (Nm)	L(mm)			
96613	10-50	285	1	12	6.6
96615	20-100	390	1	12	10
96616	40-200	560	1	6	11

▲ Warranty of 6 months (except for the insulating layer)

11981 1/4" Dr. VDE Quick Release Ratchet



- Certified by VDE and tested to 10,000 volts, meeting IEC/EN 60900 standard
- Turning with only one hand for effortlessness
- Capable of quick release, requiring only one hand for operation

No.	L(mm)			
11981	145	6	72	13