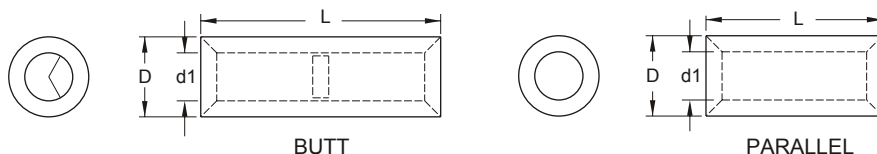


NON-INSULATED PARALLEL & BUTT CONNECTORS


MAXIMUM ELECTRIC CURRENT:

A.W.G.	6	4	2	1/0	2/0	3/0	4/0	250	300
AMP.	95	125	170	230	265	310	360	405	445

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.			DIMENSION ^{inch} mm				CRIMPING TOOL	Q'TY BOX
	PARALLEL	L	BUTT	L	D	d1	T		
6 A.W.G. 14 mm ²	PNT14	.433 11.0	BNT14	1.024 26.0	.350 8.9	.232 5.9	.059 1.5	IZUMI MODEL 9H-60 9H-150 12#A WITH DIE INDEX NO:14	500
6 A.W.G. 16 mm ²	PNT16-8	.315 8.0			.374 9.5	.272 6.9	.052 1.32		100
4 A.W.G. 22 mm ²	PNT22	.531 13.5	BNT22	1.142 29.0	.445 11.3	.307 7.8	.069 1.75	IZUMI MODEL 9H-60 9H-150 12#A WITH DIE INDEX NO:22	250
			BNT22-58	2.283 58.0					250
2 A.W.G. 38 mm ²	PNT38	.650 16.5	BNT38	1.260 32.0	.520 13.2	.374 9.5	.073 1.85	IZUMI MODEL 9H-60 9H-150 12#A WITH DIE INDEX NO:38	250
			BNT38-64	2.520 64.0					250
1/0 MCM 60 mm ²	PNT60	.748 19.0	BNT60	1.417 36.0	.602 15.3	.449 11.4	.077 1.95	IZUMI MODEL 9H-150 12#A WITH DIE INDEX NO:60	100
			BNT60-72	2.835 72.0					100
2/0 MCM 70 mm ²	PNT70	.748 19.0	BNT70	1.457 37.0	.689 17.5	.524 13.3	.083 2.1	IZUMI MODEL 9H-150 12#A WITH DIE INDEX NO:70	100
3/0 MCM 80 mm ²	PNT80	.768 19.5	BNT80	1.496 38.0	.768 19.5	.571 14.5	.098 2.5	IZUMI MODEL 9H-150 12#A WITH DIE INDEX NO:80	50
			BNT80-76	2.992 76.0					50
4/0 MCM 100 mm ²	PNT100	.787 20.0	BNT100	1.496 38.0	.870 22.1	.646 16.4	.112 2.85	IZUMI MODEL 9H-150 12#A WITH DIE INDEX NO:100	50
			BNT100-76	2.992 76.0					50
250/300 MCM 150 mm ²	PNT150	1.063 27.0	BNT150	2.126 54.0	1.039 26.4	.768 19.5	.136 3.45	IZUMI MODEL 12#A WITH DIE INDEX NO:150	25
			BNT150-108	4.252 108.0					25

UL cUL ALL LISTED