


NON-INSULATED RING TERMINALS

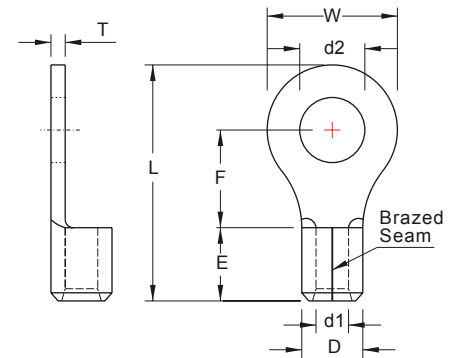

MAXIMUM ELECTRIC CURRENT:

A.W.G.	500	600
AMP.	620	690

TERMINAL MATERIAL: COPPER

SURFACE TREATMENT: TIN PLATED

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION ^{inch} mm						CRIMPING TOOL	Q'TY BOX						
	BRAZED SEAM	BUTTED SEAM	d2		W	F	L	E	D	d1			T					
500/600 MCM	RNB325-14		9/16	.591 15.0	1.988 50.5	1.319 33.5	3.465 88.0	1.398 35.5	1.480 37.6	1.102 28.0	.169 4.3	IZUMI MODEL 12K-1 12#A WITH DIE INDEX NO:325 OR K.S. MODEL KSTP-325 WITH DIE INDEX NO:400	5					
	RNB325-16		5/8	.669 17.0									5					
	RNBL325-16		5/8	.669 17.0									5					
	RNB325-18		11/16	.748 19.0									5					
325 mm ²	RNB325-20		3/4	.827 21.0		1.772 45.0	4.161 105.7						1.398 35.5	1.480 37.6	1.102 28.0	.169 4.3	IZUMI MODEL 12K-1 12#A WITH DIE INDEX NO:325 OR K.S. MODEL KSTP-325 WITH DIE INDEX NO:400	5
	RNB325-22		7/8	.906 23.0														5
	RNB325-24		15/16	.984 25.0														5
	RNB325-27		1	1.102 28.0														5




ALL LISTED

* : ADDITIONAL CERTIFIED

■ : 90D available

Products can be bend to 90-degrees angle.

NON-INSULATED RING TERMINALS

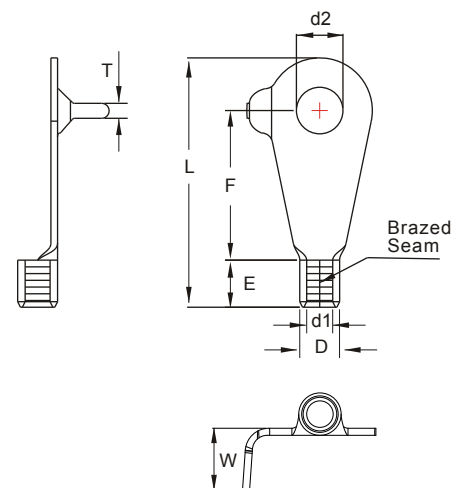

MAXIMUM ELECTRIC CURRENT:

A.W.G.	8
AMP.	70

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION inch mm							CRIMPING TOOL	Q'TY BOX
	BRAZED SEAM	BUTTED SEAM	d2		W	F	L	E	D	d1	T		
8 A.W.G. 8 mm ²	RNBTL8-8		5/16	.331 8.4	.413 10.5	1.063 27.0	1.772 45.0	.335 8.5	.283 7.2	.185 4.7	.106 2.7	KST2000D-1322	200