


**NTN BEARING CORPORATION OF AMERICA**

Head Office

1600 E. Bishop Court, P.O. Box 7604

Mount Prospect, IL 60056-7604, U.S.A.


**Phone:** 847-298-7500

**Fax:** 847-699-9744

**Toll Free:** 800-323-2358

**Email:** [mkt@ntnamerica.com](mailto:mkt@ntnamerica.com)
**Website:** [www.ntnamericas.com](http://www.ntnamericas.com)

## Item # WBC5-11ZZ, Single Row Radial Ball Bearing - Double Shielded

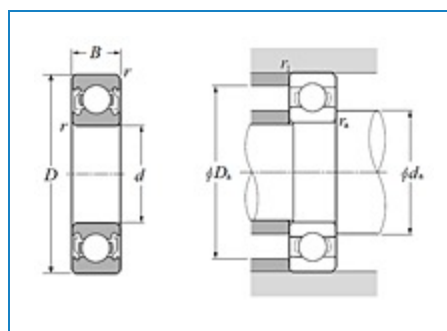
[Order Now](#) | [Technical Specifications](#) | [Dimensional Specifications](#)

### Order Now

#### Ordering Options

[FIND A DISTRIBUTOR](#)
[CONTACT NTN CUSTOMER SUPPORT SPECIALIST](#)
[ORDER THROUGH NTN DOL \(AUTHORIZED DISTRIBUTORS ONLY\)](#)


### Technical Specifications

#### Type

Deep Groove Ball Bearing

|                                    |                                |
|------------------------------------|--------------------------------|
| <b>Bore Type</b>                   | Round                          |
| <b>Material</b>                    | High Carbon Chrome Steel       |
| <b>Cage Type</b>                   | Stainless (Crown Type)         |
| <b>Cage Material</b>               | Steel                          |
| <b>Ball Material</b>               | Steel                          |
| <b>Limiting Speed - Grease</b>     | 43000 RPM                      |
| <b>Seal Type</b>                   | None                           |
| <b>Seal Material</b>               | None                           |
| <b>Precision</b>                   | ISO Class 0                    |
| <b>Configuration</b>               | One                            |
| <b>Factor</b>                      | 14.0                           |
| <b>Radial Internal Clearance</b>   | CN                             |
| <b>Static Load Rating</b>          | 63 lbf<br>282 N<br>0.28 kN     |
| <b>Dynamic Load Rating</b>         | 170 lbf<br>795 N<br>0.80 kN    |
| <b>Enclosure</b>                   | Double Shielded                |
| <b>Weight</b>                      | 0.004 lb<br>0.002 kg           |
| <b>Operating Temperature Range</b> | -40 to 250 °F<br>-40 to 120 °C |

## Dimensional Specifications

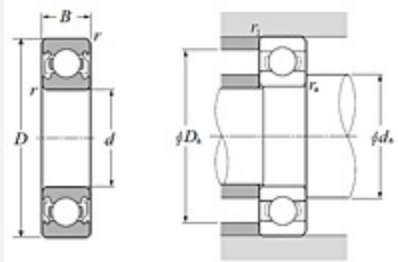

Single Row Radial Ball Bearing - Double Shielded - Dimensions

|                |                        |
|----------------|------------------------|
| <b>d</b>       | 0.1969 in<br>5.000 mm  |
| <b>D</b>       | 0.4331 in<br>11.000 mm |
| <b>B</b>       | 0.1575 in<br>4.000 mm  |
| <b>r</b>       | 0.0059 in<br>0.150 mm  |
| <b>da min</b>  | 0.2441 in<br>6.200 mm  |
| <b>da max</b>  | 0.2677 in<br>6.800 mm  |
| <b>Da max</b>  | 0.3858 in<br>9.800 mm  |
| <b>ras max</b> | 0.0079 in<br>0.200 mm  |