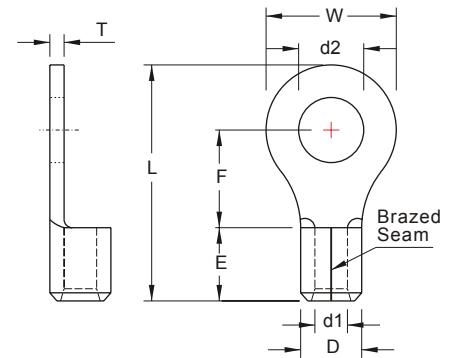


# NON-INSULATED RING TERMINALS


**MAXIMUM ELECTRIC CURRENT:**

|        |     |     |     |
|--------|-----|-----|-----|
| A.W.G. | 400 | 500 | 600 |
| AMP.   | 545 | 620 | 690 |

**TERMINAL MATERIAL: COPPER**
**SURFACE TREATMENT: TIN PLATED**

| WIRE RANGE<br>A.W.G.<br>mm <sup>2</sup> | ITEM NO.    |             | STUD SIZE |               | DIMENSION <small>inch<br/>mm</small> |               |                |               |               |               |             | CRIMPING TOOL                                                                                                         | Q'TY BOX |
|-----------------------------------------|-------------|-------------|-----------|---------------|--------------------------------------|---------------|----------------|---------------|---------------|---------------|-------------|-----------------------------------------------------------------------------------------------------------------------|----------|
|                                         | BRAZED SEAM | BUTTED SEAM | d2        |               | W                                    | F             | L              | E             | D             | d1            | T           |                                                                                                                       |          |
| 400/500 MCM<br><br>200 mm <sup>2</sup>  | RNB200-8    |             | 5/16      | .331<br>8.4   | 1.732<br>44.0                        | .965<br>24.5  | 2.835<br>72.0  | 1.240<br>31.5 | 1.283<br>32.6 | .945<br>24.0  | .157<br>4.0 | IZUMI MODEL 12K-1<br><b>12#A</b><br>WITH DIE INDEX NO.:200<br><br>OR<br>K.S. MODEL KSTP-325<br>WITH DIE INDEX NO.:240 | 10       |
|                                         | RNBL200-8   |             | 5/16      | .331<br>8.4   |                                      | 1.437<br>36.5 | 3.555<br>90.3  |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNB200-10   |             | 3/8       | .413<br>10.5  |                                      | .965<br>24.5  | 2.835<br>72.0  |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNBL200-10  |             | 3/8       | .413<br>10.5  |                                      | 1.437<br>36.5 | 3.555<br>90.3  |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNB200-11   |             | 7/16      | .453<br>11.5  |                                      | .965<br>24.5  | 2.835<br>72.0  |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNB200-12   |             | 1/2       | .512<br>13.0  |                                      |               |                |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNBL200-12  |             | 1/2       | .512<br>13.0  |                                      | 1.437<br>35.5 | 3.555<br>90.3  |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNB200-14   |             | 9/16      | .591<br>15.0  |                                      | .965<br>24.5  | 2.835<br>72.0  |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNB200-16   |             | 5/8       | .669<br>17.0  |                                      |               |                |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNBL200-16  |             | 5/8       | .669<br>17.0  |                                      | 1.437<br>36.5 | 3.555<br>90.3  |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNB200-18   |             | 11/16     | .748<br>19.0  |                                      |               |                |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNB200-20   |             | 3/4       | .827<br>21.0  |                                      |               |                |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNB200-22   |             | 7/8       | .906<br>23.0  |                                      | 1.437<br>37.5 | 3.583<br>91.0  |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNB200-24   |             | 15/16     | .984<br>25.0  |                                      |               |                |               |               |               |             |                                                                                                                       | 10       |
|                                         | RNB200-27   |             | 1         | 1.102<br>28.0 |                                      |               |                |               |               |               |             |                                                                                                                       | 10       |
| 400/500 MCM<br><br>200 mm <sup>2</sup>  | RNB250-10   |             | 3/8       | .413<br>10.5  | 1.732<br>44.0                        |               |                | 1.240<br>31.5 | 1.287<br>32.7 | .945<br>24.0  | .157<br>4.0 |                                                                                                                       | 5        |
|                                         | RNB250-12   |             | 1/2       | .512<br>13.0  |                                      | .965<br>24.5  | 2.835<br>72.0  |               |               |               |             |                                                                                                                       | 5        |
|                                         | RNB250-16   |             | 5/8       | .669<br>17.0  |                                      |               |                |               |               |               |             |                                                                                                                       | 5        |
| 500/600 MCM<br><br>325 mm <sup>2</sup>  | RNB325-8    |             | 5/16      | .331<br>8.4   | 1.988<br>50.5                        |               |                | 1.398<br>35.5 | 1.480<br>37.6 | 1.102<br>28.0 | .169<br>4.3 | IZUMI MODEL 12K-1<br><b>12#A</b><br>WITH DIE INDEX NO.:325<br>OR<br>K.S. MODEL KSTP-325<br>WITH DIE INDEX NO.:400     | 5        |
|                                         | RNB325-10   |             | 3/8       | .413<br>10.5  |                                      | 1.319<br>33.5 | 3.465<br>88.0  |               |               |               |             |                                                                                                                       | 5        |
|                                         | RNBL325-10  |             | 3/8       | .413<br>10.5  |                                      | 1.772<br>45.0 | 4.154<br>105.5 |               |               |               |             |                                                                                                                       | 5        |
|                                         | RNB325-11   |             | 7/16      | .453<br>11.5  |                                      | 1.319<br>33.5 | 3.465<br>88.0  |               |               |               |             |                                                                                                                       | 5        |
|                                         | RNB325-12   |             | 1/2       | .512<br>13.0  |                                      |               |                |               |               |               |             |                                                                                                                       | 5        |
|                                         | RNBL325-12  |             | 1/2       | .512<br>13.0  |                                      | 1.772<br>45.0 | 4.154<br>105.5 |               |               |               |             |                                                                                                                       | 5        |