



## Torque Wrench Open Box End Fitting

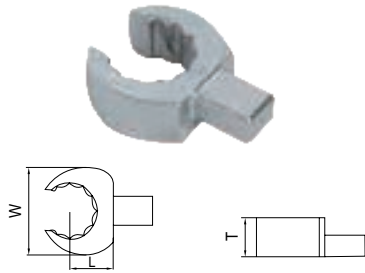

- Torque wrench head easy to change, suitable for narrow space with tight bolt connection
- Made of hot-forged Cr-V with chrome-plated surface
- Capable of bolt tripping

No.	Spec. (mm)	Connector (mm)	L(mm)	T(mm)	W(mm)	Weight (g)			
96710K	10	9×12	17.5	12	21.2	57	12	-	-
96711K	11	9×12	17.5	12	22.6	55	12	-	-
96712K	12	9×12	17.5	12	24.1	59	12	-	-
96713K	13	9×12	17.5	12	25.2	55	12	-	-
96714K	14	9×12	17.5	13	27.3	60	12	-	-
96716K	16	9×12	17.5	13	30.1	65	12	-	-
96717K	17	9×12	17.5	13	31.6	64	12	-	-
96718K	18	9×12	17.5	15	33.3	74	12	-	-
96719K	19	9×12	17.5	15	34.6	80	12	-	-
96721K	21	9×12	17.5	15	37.7	88	12	-	-
96722K	22	9×12	17.5	15	39.3	92	12	-	-


## Torque Wrench Ratcheting Head

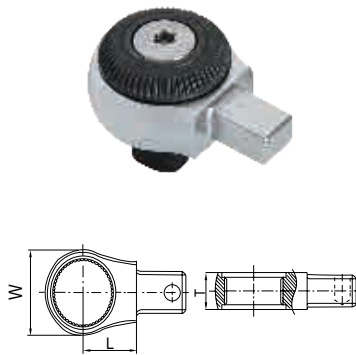

- Torque wrench head easy to change, suitable for narrow space with tight bolt connection
- Made of hot-forged Cr-V with chrome-plated surface
- Capable of bolt tripping

No.	Driving Head	Spec. (mm)	Connector (mm)	L (mm)	T (mm)	W (mm)	Weight (g)			
96572	1/4"	12	9×12	17.5	23	25	69	12	-	-
96573	3/8"	12	9×12	17.5	33	34	143	12	-	-
96574	1/2"	12	9×12	17.5	38	34	154	12	-	-
96575	1/2"	18	14×18	25	43	41	300	6	-	-

## Torque Wrench Open End Fitting

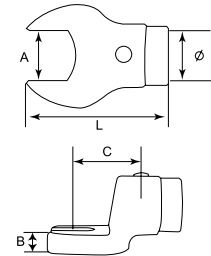

- Torque wrench head easy to change, suitable for narrow space with tight bolt connection
- Made of hot-forged Cr-V with chrome-plated surface
- Capable of bolt tripping

No.	Active Tip Width A(mm)	Active Tip Depth B(mm)	Depth C(mm)	Connector Φ(mm)	L (mm)	Weight (kg)			
96521K	7	5	32	16	54	0.08	1	-	-
96522K	8	5	32	16	54	0.08	1	-	-
96523K	9	5	32	16	58	0.08	1	-	-
96524K	10	7	32	16	58	0.09	1	-	-
96525K	11	7	32	16	58	0.09	1	-	-
96526K	12	7	32	16	55	0.09	1	-	-
96527K	13	8	32	16	58	0.12	1	-	-
96528K	14	8	32	16	58	0.12	1	-	-
96529K	15	8	32	16	58	0.12	1	-	-
96530K	16	9	32	16	58	0.16	1	-	-
96531K	17	9	32	16	58	0.16	1	-	-
96532K	18	9	32	16	58	0.16	1	-	-
96533K	19	10	32	16	63	0.18	1	-	-
96534K	20	10	32	16	63	0.18	1	-	-
96535K	21	10	32	16	63	0.18	1	-	-
96536K	22	11	32	16	63	0.22	1	-	-
96537K	24	11	32	16	64	0.22	1	-	-
96538K	27	12	32	16	66	0.26	1	-	-
96539K	30	12	32	16	66	0.3	1	-	-
96540K	32	12	32	16	66	0.3	1	-	-
96541K	36	12	32	16	65	0.3	1	-	-
96551K	22	11	56	22	90	0.33	1	-	-
96552K	24	11	56	22	90	0.32	1	-	-
96553K	27	12	56	22	93	0.38	1	-	-
96554K	30	12	56	22	93	0.37	1	-	-
96555K	32	12	56	22	98	0.45	1	-	-
96556K	34	12	56	22	98	0.43	1	-	-
96557K	36	12	56	22	96	0.43	1	-	-
96558K	41	12	56	22	103	0.58	1	-	-
96559K	46	12	56	22	103	0.53	1	-	-

▲ Excluded from lifetime warranty terms.