


## Preset Torque Wrench

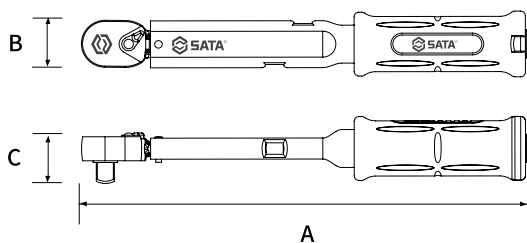

- No torque value scale and adjustment mechanism are provided for the Pre-Set Torque Wrench. Only special tools can be used to set and change the torque value of the product.
- Internal tripping mechanism with imported high-precision spring for accuracy and durability
- When reaching the torque set value, the internal device sends out the sound of "click" with vibration. At this time, stop operation immediately to prevent overtightening.
- It can be used in both directions, but only in the forward (clockwise) direction can the torque value be set.
- Ratchet with 36 teeth with operating angle for each tooth of 10°, suitable for use in narrow space
- Meeting ISO 6789-2004 standard

### Torque adjustment tools:

- T15 Torx® wrenches with tamper for 96241, 96242 and 96243
- T25 Torx® wrenches with tamper for 96244 and 96245

No.	Torsion Adjustment Range(N.m)	Driving Head(M) Spec.	Total Length A(mm)	Tip Height B(mm)	Tip Height C(mm)	Weight (kg)			
96241	1-5	1/4"	190	25	21	0.2	-	10	4.5
96242	5-25	3/8"	215	25	25	0.22	-	10	4.8
96243	10-50	3/8"	235	25	25	0.37	-	10	6.2
96244	20-100	1/2"	315	32	34	0.63	-	10	9.6
96245	40-200	1/2"	463	32	34	1.15	-	10	16.2

1. Default torque of the fixed torque wrench is 0 N.m.
2. Torque can be set according to user's requirement, but the delivery date will be extended. (For details, please contact the local sales staff or call SATA service hotline for consultation.)

## Electronic Torque Wrench



- Output torque accuracy up to +/-1.5% (forward) and +/-2% (reverse)
- Three types of prompts available: indicator light, buzzer and vibrator
- Available torque units: n-m/bf-ftt/lbft-in/kgf-m/kgf-cm

No.	Driving Head (in.)	Torsion Range (N.m)	Torsion Range (lbf.ft)	Total Length (mm)	Indexing (N-m)	Weight (g)			
96525	3/8	27-135	19.9-99.6	400	0.1	980	-	8	11.5
96526	1/2	40-200	29.5-147	550	0.1	1080	-	6	10
96527	1/2	68-340	50-250.9	628	0.1	1380	-	6	12
96528	3/4	120-600	88.5-443	1248	0.1	5940	-	1	8.7
96529	3/4	160-800	118-590	1248	0.1	5940	-	1	8.7
96530	3/4	200-1000	147.5-738	1248	1	5940	-	1	8.7
96531	11	300-1500	221.2-1106	1248	1	6100	-	1	8.9
96532	3/4	400-2000	295-1475	2000	1	12000	-	1	174

- ▲ This product is a precision instrument with warranty of 12 months /10000 times.

## Interchangeable Torque Wrench



- Forged from quality Cr-V square joint with chrome-plated surface
- Rod subjected to heat treatment for durability and anti-deformation
- Pull-down clasp for torque adjustment for efficiency and convenience
- Anodized and knurled handle made of aluminum alloy, being artistic and elegant
- Applicable to square socket wrench heads with 9\*12mm and 14\*18mm interfaces below

No.	Connector Size(mm)	Torsion Range (N.m)	Total Length (mm)	Indexing (N-m)	Accuracy	Weight (g)			
96221	9×12	1-5	210	0.1	3%	300	-	16	8.8
96222	9×12	5-25	250	0.1	3%	330	-	16	9.4
96321	9×12	20-100	424	0.5	3%	1020	-	10	14.3
96322	14×18	40-200	530	1	3%	1390	-	10	16.8
96323	14×18	68-340	591	2	3%	1460	-	10	19.7

- ▲ This product is a precision instrument with warranty of 90 days /5000 times.