

Technical data



2206S

Double-row self-aligning ball bearings



Self-aligning ball bearing, pressed steel cage, open

VISUAL (S)

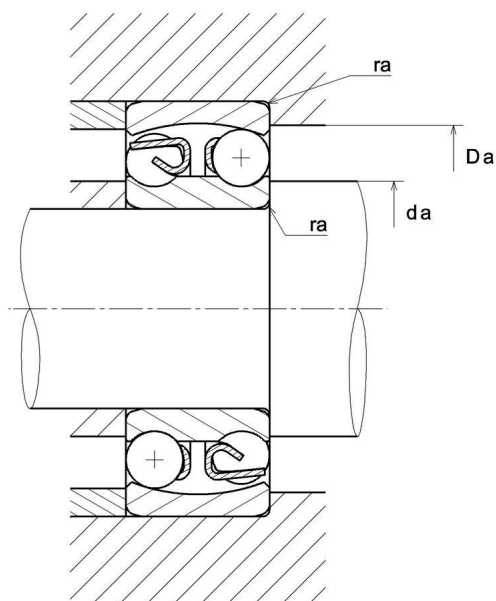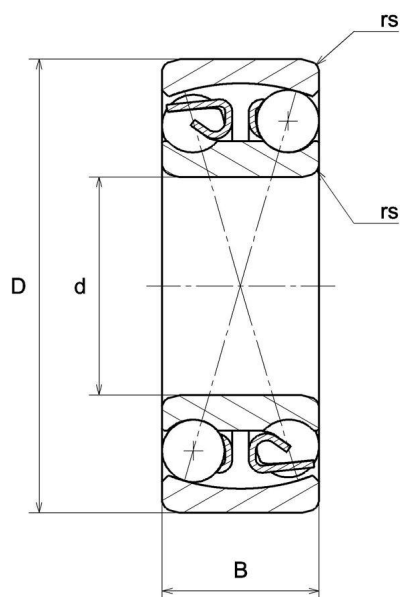

PRODUCT DEFINITION

Brand	NTN
d - Internal diameter	30 mm
D - External diameter	62 mm
B - Bearing/Inner ring width	20 mm
rs - Min fillet radius	1 mm
Radial clearance class	CN
Precision class	P0
Mass	0,262 kg

PRODUCT PERFORMANCE

C - Dynamic load	15,3 kN
C0 - Static load	4,55 kN
Cu - Fatigue limit load	0,26 kN
e - Coefficient	0.38
Y0 - Static axial load coefficient	1.7
Y1 - Lower axial load coefficient	1.6
Y2 - Upper axial load coefficient	2.5
N lim - Oil lubrication limit speed	12000 tr/min
N lim - Grease lubrication limit speed	10000 tr/min
Tmin - Min operating temperature	-20 °C
Tmax - Max operating temperature	120 °C

ABUTMENT

da min - Min shoulder diameter IR	35 mm
Da max - Max shoulder diameter OR	57 mm



2206S
Double-row self-aligning ball bearings

ABUTMENT	
ra max - Max shaft & housing fillet radius	1 mm