


NON-INSULATED COPPER TUBULAR LUGS (TLK SERIES)

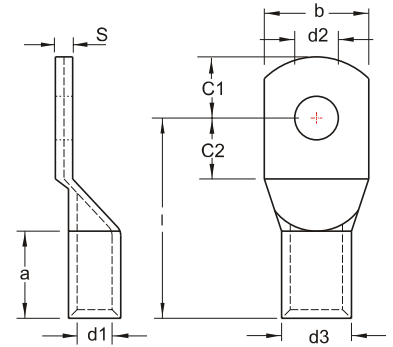

MAXIMUM ELECTRIC CURRENT:

A.W.G.	1/0	2/0	3/0
AMP.	230	265	310

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION mm									CRIMPING TOOL	Q'TY BOX				
		a	b	C1	C2	d1	d2	d3	I	S						
1/0 A.W.G. 50 mm ²	TLK50-6	19.0	20.0	10.0	10.0	10.0	6.4	14.0	37.0	3.7	MODEL HPM400	100				
	TLK50-8						8.4						100			
	TLK50-10				12.0		12.0		10.5			39.0	100			
	TLK50-12		23.0	13.0	13.0		13.0	14.0	43.0	3.3		100				
	TLK50-14			14.5	14.5		15.0	45.0	100							
	TLK50-16			28.0	16.0		16.0	17.0	46.0			2.7	100			
	TLK50-20			30.0	19.0		19.0	21.0	48.0			2.5	100			
2/0 A.W.G. 70 mm ²	TLK70-6	21.0	23.0	10.0	10.0	12.0	6.4	16.5	43.0	4.3	NOVOPRESS MODEL HPM400	50				
	TLK70-8						8.4						50			
	TLK70-10				12.0		12.0		10.5			44.0	50			
	TLK70-12				13.0		13.0		13.0			46.0	50			
	TLK70-13			14.5	14.5		14.0		48.0			50				
	TLK70-14						15.0					50				
	TLK70-16			28.0	16.0		16.0		17.0			50.0	3.5	50		
	TLK70-20		30.0	19.0	19.0		21.0	53.0	3.4	50						
3/0 A.W.G. 95 mm ²	TLK95-6	25.0	26.0	12.0	12.0	13.5	6.4	18.0	48.0	4.2	NOVOPRESS MODEL HPM400	50				
	TLK95-8												8.4			50
	TLK95-10												10.5			50
	TLK95-12				13.0		13.0		13.0			49.0	50			
	TLK95-14				14.5		14.5		15.0			51.0	50			
	TLK95-16		28.0	16.0	16.0		17.0	54.0	4.0	25						
	TLK95-20		36.0	22.0	22.0		21.0	60.0	3.0	25						