


NON-INSULATED COPPER TUBULAR LUGS (TLAPH-2A SERIES)

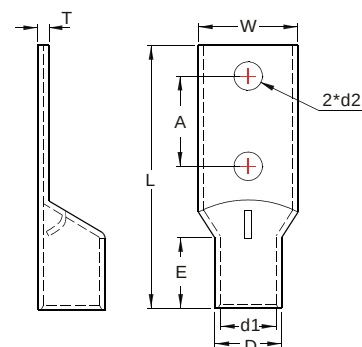

MAXIMUM ELECTRIC CURRENT:

A.W.G.	2	1/0	3/0	4/0	250	300	350	400	500	600	800	1000
AMP.	170	230	310	360	405	445	505	545	620	690	815	935

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.	STUD SIZE	DIMENSION mm							CRIMPING TOOL	Q'TY BOX
		2×d2	W	A	L	E	D	d1	T		
2 A.W.G. 38 mm ²	TLAPH38-2A8	9.0	17.5	25.4	65.8	12.0	12.1	9.5	2.2	NOVOPRESS MODEL HPM400	100
1/0 A.W.G. 60 mm ²	TLAPH60-2A8	9.0	21.3	25.4	74.7	14.0	14.7	11.9	2.8	NOVOPRESS MODEL HPM400	50
	TLAPH60-2A10	11.0									
3/0 A.W.G. 80 mm ²	TLAPH80-2A8	9.0	26.7	25.4	82.3	19.0	18.1	14.9	3.2	NOVOPRESS MODEL HPM400	50
	TLAPH80-2A10	11.0									
4/0 A.W.G. 100 mm ²	TLAPH100-2A10	11.0	29.7	25.4	86.6	19.0	20.6	16.8	3.8	NOVOPRESS MODEL HPM400	25
250 MCM 125 mm ²	TLAPH125-2A10	11.0	32.0	25.4	89.7	21.8	21.8	17.8	4.0	NOVOPRESS MODEL HPM400	25
300 MCM 150 mm ²	TLAPH150-2A10	11.0	35.0	25.4	94.5	22.0	24.0	19.6	4.4	NOVOPRESS MODEL HPM400	25
350 MCM 180 mm ²	TLAPH180-2A12	14.0	37.8	44.5	117.0	23.0	25.7	21.1	4.5	NOVOPRESS MODEL HPM400	25
400 MCM 200 mm ²	TLAPH200-2A12	14.0	40.0	44.5	119.6	24.0	27.7	22.5	5.2	NOVOPRESS MODEL HPM400	25
500 MCM 250 mm ²	TLAPH250-2A12	14.0	45.2	44.5	120.7	26.0	30.8	25.2	5.5	NOVOPRESS MODEL HPM400	10
600 MCM 350 mm ²	TLAPH325-2A12	14.0	49.2	44.5	130.2	35.0	33.8	27.6	6.0	NOVOPRESS MODEL HPM400	10
800 MCM 400 mm ²	TLAPH400-2A12	14.0	56.9	44.5	136.8	39.0	38.7	32.2	6.5	NOVOPRESS MODEL HPM400	5
	TLAPH400-2A16	17.0									
1000 MCM 500 mm ²	TLAPH500-2A12	14.0	63.5	44.5	147.5	42.0	43.5	36.0	7.5		5