


NON-INSULATED (2 HOLES) RING TERMINALS

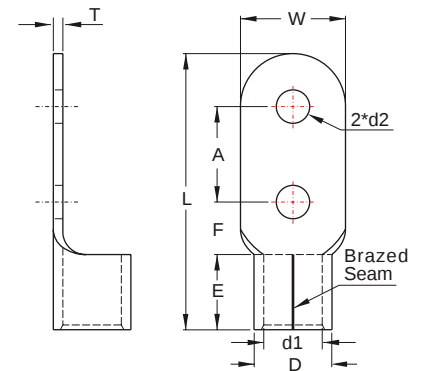

MAXIMUM ELECTRIC CURRENT:

A.W.G.	1/0	2/0	3/0	4/0	250	300	350
AMP.	230	265	310	360	405	445	505

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.	STUD SIZE		DIMENSION inch mm								CRIMPING TOOL	Q'TY BOX
		2Xd2		W	F	A	L	E	D	d1	T		
1/0 A.W.G. 60 mm ²	RNB60-10-2B	7/16	.433 11.0	.866 22.0	.669 17.0	1.260 32.0	3.071 78.0	.709 18.0	.610 15.5	.449 11.4	.071 1.8	IZUMI MODEL 9H-2, 9H-150, 12#A WITH DIE INDEX NO.: 60 OR K.S. MODEL KH-120 WITH DIE INDEX NO.: 50	50
	RNB60-12-2B	9/16	.551 14.0		.787 20.0	1.575 40.0	3.503 89.0						50
	RNB60-14-2B	5/8	.630 16.0		.827 21.0		3.740 95.0						50
2/0 A.W.G. 70 mm ²	RNB70-10-2B	7/16	.433 11.0	.945 24.0	.669 17.0	1.260 32.0	3.150 80.0	.748 19.0	.689 17.5	.524 13.3	.079 2.0	IZUMI MODEL 9H-2, 9H-150, 12#A WITH DIE INDEX NO.: 70 OR K.S. MODEL KH-150 WITH DIE INDEX NO.: 70	50
	RNB70-12-2B	9/16	.551 14.0		.787 20.0	1.575 40.0	3.583 91.0						50
	RNB70-14-2B	5/8	.630 16.0		.827 21.0		3.780 96.0						50
3/0 A.W.G. 80 mm ²	RNB80-10-2B	7/16	.433 11.0	1.063 27.0	.669 17.0	1.260 32.0	3.248 82.5	.787 20.0	.768 19.5	.571 14.5	.091 2.3	IZUMI MODEL 9H-2, 9H-150, 12#A WITH DIE INDEX NO.: 80 OR K.S. MODEL KH-150 WITH DIE INDEX NO.: 95	25
	RNB80-12-2B	9/16	.551 14.0		.815 20.7	1.575 40.0	3.709 94.2						25
	RNB80-14-2B	5/8	.630 16.0		.827 21.0		3.819 97.0						25
4/0 A.W.G. 100 mm ²	RNB100-10-2B	7/16	.433 11.0	1.122 28.5	.669 17.0	1.260 32.0	3.319 84.3	.827 21.0	.878 22.3	.646 16.4	.106 2.7	IZUMI MODEL 9H-2, 9H-150, 12#A WITH DIE INDEX NO.: 100 OR K.S. MODEL KH-150 WITH DIE INDEX NO.: 120	25
	RNB100-12-2B	9/16	.551 14.0		.807 20.5	1.575 40.0	3.760 95.5						25
	RNB100-14-2B	5/8	.630 16.0		.827 21.0		3.858 98.0						25
250/300 MCM 150 mm ²	RNB150-12-2B	9/16	.551 14.0	1.417 36.0	.827 21.0	1.575 40.0	4.173 106.0	1.063 27.0	1.043 26.5	.768 19.5	.126 3.2	IZUMI MODEL 9H-2, 9H-150, 12#A WITH DIE INDEX NO.: 150 OR K.S. MODEL KSTP-150D WITH DIE INDEX NO.: 150	20
	RNB150-14-2B	5/8	.630 16.0										20
300/350 MCM 180 mm ²	RNB180-12-2B	9/16	.551 14.0	1.516 38.5	.827 21.0	1.575 40.0	4.252 108.8	1.122 28.5	1.126 28.5	.827 21.0	.138 3.5	IZUMI MODEL 12#A WITH DIE INDEX NO.: 180 OR K.S. MODEL KSTP-150D WITH DIE INDEX NO.: 180	20
	RNB180-14-2B	5/8	.630 16.0										20

UL cUL ALL LISTED