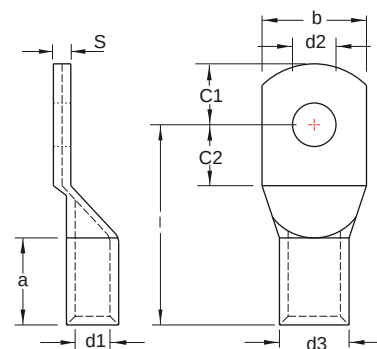


NON-INSULATED COPPER TUBULAR LUGS (TLK SERIES)


MAXIMUM ELECTRIC CURRENT:

A.W.G.	4/0	250	300	350	400
AMP.	360	405	445	505	545

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION mm									CRIMPING TOOL	Q'TY BOX
		a	b	C1	C2	d1	d2	d3	I	S		
4/0 A.W.G. 120 mm ²	TLK120-6	26.0	28.0	14.0	14.0	15.0	6.4	19.5	51.0	4.3	NOVOPRESS MODEL HPM400	25
	TLK120-8						8.4					25
	TLK120-10						10.5					25
	TLK120-12			13.0	25							
	TLK120-14			15.0	52.0		25					
	TLK120-16		17.0	54.0	4.0	25						
	TLK120-20		21.0	63.0	3.5	25						
250/300 MCM 150 mm ²	TLK150-8	30.0	31.0	14.0	14.0	16.5	8.4	21.0	56.0	4.3	NOVOPRESS MODEL HPM400	25
	TLK150-10			10.5	25							
	TLK150-12			13.0	57.0		25					
	TLK150-14			15.0	25							
	TLK150-16			17.0	58.0		25					
	TLK150-20		21.0	66.0	3.6		25					
300/350 MCM 185 mm ²	TLK185-10	30.0	35.0	18.0	18.0	19.0	10.5	24.0	65.0	4.7	NOVOPRESS MODEL HPM400	10
	TLK185-12						13.0					10
	TLK185-14						15.0					10
	TLK185-16						17.0					10
	TLK185-20		39.0	22.0	22.0		21.0	69.0	4.3	10		
400 MCM 240 mm ²	TLK240-8	35.0	39.0	21.0	19.5	21.0	8.4	26.0	72.5	4.8	NOVOPRESS MODEL HPM400	10
	TLK240-10			10.5	10							
	TLK240-12			13.0	10							
	TLK240-14			15.0	72.0		10					
	TLK240-16			17.0	10							
	TLK240-20			21.0	10							