


Tapered Roller Bearings

Inch series

NTN




d 31.750–34.925 mm

Boundary dimensions					Basic load rating		Allowable speed	
mm					dynamic	static	min ⁻¹	
d	D	T	B	C	C _r	C _{0r}	Grease lubrication	Oil lubrication
31.750	62.000	19.050	20.638	14.288	52.0	54.0	6 100	8 200
	66.421	25.400	25.357	20.638	76.5	81.5	5 700	7 600
	68.262	22.225	22.225	17.462	63.0	67.0	5 800	7 700
	68.262	22.225	22.225	17.462	63.0	67.0	5 800	7 700
	69.012	19.845	19.583	15.875	53.5	58.0	5 600	7 400
	69.012	19.845	19.583	15.875	53.5	58.0	5 600	7 400
	69.850	23.812	25.357	19.050	76.5	81.5	5 700	7 600
	69.850	23.812	25.357	19.050	76.5	81.5	5 700	7 600
	72.626	30.162	29.997	23.812	93.5	98.0	5 500	7 300
	72.626	30.162	29.997	23.812	93.5	98.0	5 500	7 300
	73.025	22.225	22.225	17.462	62.5	68.0	5 300	7 000
	73.025	22.225	23.812	17.462	69.5	75.5	5 200	7 000
	73.025	29.370	27.783	23.020	80.0	97.0	5 400	7 100
	73.812	29.370	27.783	23.020	80.0	97.0	5 400	7 100
33.338	76.200	29.370	28.575	23.020	86.5	105	5 100	6 800
	79.375	29.370	29.771	23.812	103	114	4 900	6 600
	68.262	22.225	22.225	17.462	62.5	71.0	5 700	7 500
	69.012	19.845	19.583	15.875	53.5	58.0	5 600	7 400
	69.850	23.812	25.357	19.050	76.5	81.5	5 700	7 600
	72.626	30.162	29.997	23.812	93.5	98.0	5 500	7 300
	73.025	29.370	27.783	23.020	80.0	97.0	5 400	7 100
	76.200	23.812	25.654	19.050	81.0	90.5	5 100	6 800
34.925	76.200	29.370	28.575	23.020	86.5	105	5 100	6 800
	76.200	29.370	28.575	23.020	86.5	105	5 100	6 800
	79.375	25.400	24.074	17.462	72.5	67.0	5 200	6 900
	65.088	18.034	18.288	13.970	51.5	56.0	5 700	7 600
	65.088	18.034	18.288	13.970	51.5	56.0	5 700	7 600
	69.012	19.845	19.583	15.875	53.5	58.0	5 600	7 400
	72.233	25.400	25.400	19.842	72.0	84.5	5 400	7 200
	72.238	20.638	20.638	15.875	53.0	58.5	5 300	7 000
	73.025	22.225	22.225	17.462	62.5	68.0	5 300	7 000
	73.025	22.225	22.225	17.462	62.5	68.0	5 300	7 000
	73.025	22.225	23.812	17.462	69.5	75.5	5 200	7 000
	73.025	23.812	24.608	19.050	78.5	85.0	5 300	7 100
	73.025	23.812	24.608	19.050	78.5	85.0	5 300	7 100
	73.025	23.812	25.654	19.050	81.0	90.5	5 100	6 800
	76.200	23.812	25.654	19.050	81.0	90.5	5 100	6 800

Note: Chamfer dimensions on the back face of the inner and outer rings of the bearing are larger than the maximum values of installation-related dimensions r_{1as} and r_{1as} .

Tapered Roller Bearings

NTN

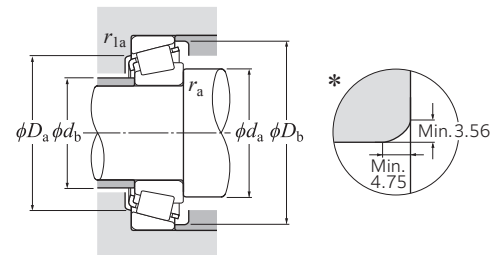

Dynamic equivalent radial load

$$P_r = XF_r + YF_a$$

$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
X	Y	X	Y
1	0	0.4	Y_2

Static equivalent radial load

$$P_{0r} = 0.5F_r + Y_0F_a$$

When $P_{0r} < F_r$ use $P_{0r} = F_r$.

For values of e , Y_2

and Y_0 see the table below.


Bearing number	Installation-related dimensions						Load center mm	Constant	Axial load factors		Mass kg
	d_a	d_b	D_a	D_b	$r_{as}^{1)}$ Max.	r_{1as} Max.			e	Y_2	Y_0
4T-15126/15245	38.5	38	55	58	0.8	1.3	6.0	0.35	1.71	0.94	0.257
4T-2580/2520	38.5	37.5	56.9	62.5	0.8	3.3	9.1	0.27	2.19	1.21	0.41
4T-02475/02420	44.5	38.5	59	63	3.5	1.5	5.2	0.42	1.44	0.79	0.382
4T-02476/02420	39	38.5	59	63	0.8	1.5	5.2	0.42	1.44	0.79	0.384
4T-14124/14276	39.5	39	60	63	0.8	1.3	4.1	0.38	1.57	0.86	0.36
4T-14125A/14276	45	39	60	63	3.5	1.3	4.1	0.38	1.57	0.86	0.357
4T-2580/2523	38.5	37.5	61	64	0.8	1.3	9.1	0.27	2.19	1.21	0.455
4T-2582/2523	44	37.5	61	64	3.5	1.3	9.1	0.27	2.19	1.21	0.452
4T-3188/3120	40	39.5	61	67	0.8	3.3	9.9	0.33	1.80	0.99	0.606
4T-3193/3120	45.5	39.5	61	67	3.5	3.3	9.9	0.33	1.80	0.99	0.605
4T-02875/02820	45.5	39.5	62	68	3.5	3.3	3.9	0.45	1.32	0.73	0.453
4T-2879/2820	39.5	38.5	63	68	0.8	3.3	5.5	0.37	1.63	0.90	0.466
4T-HM88542/HM88510	45.5	42.6	59	70	1.3	3.3	6.0	0.55	1.10	0.60	0.622
4T-HM88542/HM88512	45.5	42.6	60	70	1.3	3.3	6.0	0.55	1.10	0.60	0.638
4T-HM89440/HM89410	45.5	44.3	62	73	0.8	3.3	5.8	0.55	1.10	0.60	0.686
4T-3476/3420	43	41	67	74	1.3	3.3	8.7	0.37	1.64	0.90	0.772
4T-M88048/M88010	42.5	41.2	58	65	0.8	1.5	2.9	0.55	1.10	0.60	0.379
4T-14130/14276	46.5	40	60	63	3.5	1.3	4.1	0.38	1.57	0.86	0.345
4T-2585/2523	45	39	61	64	3.5	1.3	9.1	0.27	2.19	1.21	0.436
4T-3196/3120	47	40.5	61	67	3.5	3.3	9.9	0.33	1.80	0.99	0.584
4T-HM88547/HM88510	45.5	42.6	59	70	0.8	3.3	6.0	0.55	1.10	0.60	0.603
4T-2785/2720	46	40	66	70	3.5	3.3	7.8	0.30	1.98	1.09	0.548
4T-HM89443/HM89410	46.5	44.3	62	73	0.8	3.3	5.8	0.55	1.10	0.60	0.667
4T-HM89444/HM89410	53	44.3	62	73	3.8	3.3	5.8	0.55	1.10	0.60	0.665
4T-43131/43312	51	42.1	67	74	3.5	1.5	1.4	0.67	0.90	0.49	0.568
4T-LM48548/LM48510	48	41.5	58	61	*	1.3	3.7	0.38	1.59	0.88	0.25
4T-LM48548A/LM48510	40.5	42.2	58	61	0.8	1.3	3.7	0.38	1.59	0.88	0.252
4T-14137A/14276	43.5	41.5	60	63	1.5	1.3	4.1	0.38	1.57	0.86	0.334
4T-HM88649/HM88610	48.5	42.5	60	69	2.3	2.3	4.6	0.55	1.10	0.60	0.489
4T-16137/16284	47	40.5	63	67	3.5	1.3	4.2	0.40	1.49	0.82	0.37
4T-02877/02820	48.5	42	62	68	3.5	3.3	3.9	0.45	1.32	0.73	0.423
4T-02878/02820	42.5	42	62	68	0.8	3.3	3.9	0.45	1.32	0.73	0.426
4T-2878/2820	42	41	63	68	0.8	3.3	5.5	0.37	1.63	0.90	0.435
4T-25877/25820	43	40.5	64	68	1.5	2.3	8.1	0.29	2.07	1.14	0.47
4T-25877/25821	43	40.5	65	68	1.5	0.8	8.1	0.29	2.07	1.14	0.473
4T-2793/2735X	42	41	66	69	0.8	0.8	7.8	0.30	1.98	1.09	0.444
4T-2793/2720	42	41	66	70	0.8	3.3	7.8	0.30	1.98	1.09	0.534

1) Chamfer dimensions of the bearings marked "*" are shown in the above drawings.

Tapered Roller Bearings

NTN

Inch series
J series




d 34.925–38.100 mm

Boundary dimensions					Basic load rating		Allowable speed	
mm					dynamic	static	min ⁻¹	
d	D	T	B	C	C _r	C _{0r}	Grease lubrication	Oil lubrication
34.925	76.200	23.812	25.654	19.050	81.0	90.5	5 100	6 800
	76.200	29.370	28.575	23.020	86.5	105	5 100	6 800
	76.200	29.370	28.575	23.812	89.5	97.0	5 100	6 800
	76.200	29.370	28.575	23.812	89.5	97.0	5 100	6 800
	79.375	29.370	29.771	23.812	103	114	4 900	6 600
	80.167	29.370	30.391	23.812	105	112	4 800	6 400
	85.725	30.162	30.162	23.812	116	132	4 500	6 000
34.976	69.012	19.845	19.583	15.875	53.5	58.0	5 600	7 400
34.988	59.974	15.875	16.764	11.938	39.0	47.5	6 100	8 100
	61.973	16.700	17.000	13.600	41.0	48.0	5 900	7 900
	61.973	18.000	17.000	15.000	41.0	48.0	5 900	7 900
35.000	70.000	24.000	23.500	19.000	69.0	78.0	5 500	7 300
	79.375	23.812	25.400	19.050	85.0	97.5	4 800	6 400
	80.000	21.000	22.403	17.826	75.5	75.0	4 700	6 300
35.717	72.233	25.400	25.400	19.842	72.0	84.5	5 400	7 200
	72.626	25.400	25.400	19.842	72.0	84.5	5 400	7 200
36.487	73.025	23.812	24.608	19.050	78.5	85.0	5 300	7 100
	76.200	23.812	25.654	19.050	81.0	90.5	5 100	6 800
36.512	76.200	29.370	28.575	23.020	86.5	105	5 100	6 800
	76.200	29.370	28.575	23.020	86.5	105	5 100	6 800
	76.200	29.370	28.575	23.812	89.5	97.0	5 100	6 800
	79.375	29.370	28.829	22.664	95.5	104	5 000	6 600
	79.375	29.370	29.771	23.812	103	114	4 900	6 600
	88.500	25.400	23.698	17.462	78.5	78.0	4 000	5 300
38.000	63.000	17.000	17.000	13.500	43.0	52.5	5 700	7 600
38.100	63.500	12.700	11.908	9.525	28.7	33.5	5 500	7 300
	65.088	18.034	18.288	13.970	48.0	57.0	5 500	7 400
	69.012	19.050	19.050	15.083	53.0	59.5	5 300	7 100
	69.012	19.050	19.050	15.083	53.0	59.5	5 300	7 100
	71.438	15.875	16.520	11.908	48.0	51.0	5 400	7 200
	72.000	19.000	20.638	14.237	53.0	58.5	5 300	7 000

Note: Chamfer dimensions on the back face of the inner and outer rings of the bearing are larger than the maximum values of installation-related dimensions r_{1a} and r_{1b} .
1) As for the maximum value for inner and outer ring diameters of bearings whose bearing numbers are marked with "†" (inner ring) and "††" (outer ring), the precision class is an integer for Class 4 and Class 2 bearings only.

Tapered Roller Bearings

NTN

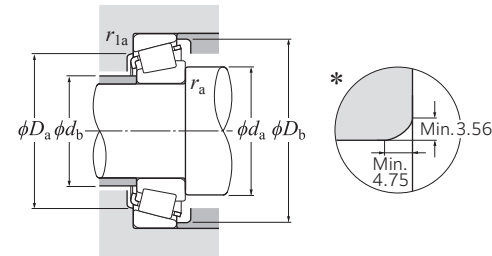

Dynamic equivalent radial load
 $P_r = X F_r + Y F_a$

$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
X	Y	X	Y
1	0	0.4	Y_2

Static equivalent radial load

$P_{0r} = 0.5 F_r + Y_0 F_a$
When $P_{0r} < F_r$ use $P_{0r} = F_r$.
For values of e , Y_2
and Y_0 see the table below.


Bearing number ¹⁾²⁾	Installation-related dimensions						Load center ⁴⁾ mm	Constant	Axial load factors		Mass kg		
	mm								e	Y_2		Y_0	(approx.)
	d_a	d_b	D_a	D_b	$r_{as}^{3)}$ Max.	r_{1as} Max.							
4T-2796/2729	47.5	41	68	70	3.5	0.8	7.8	0.30	1.98	1.09	0.536		
4T-HM89446/HM89410	56	44.3	62	73	3.5	3.3	5.8	0.55	1.10	0.60	0.646		
4T-31593/31520	50	43.5	64	72	3.5	3.3	7.8	0.40	1.49	0.82	0.626		
4T-31594/31520	46	43.5	64	72	1.5	3.3	7.8	0.40	1.49	0.82	0.628		
4T-3478/3420	50	43.5	67	74	3.5	3.3	8.7	0.37	1.64	0.90	0.731		
4T-3379/3320	48	41.5	70	75	3.5	3.3	11.2	0.27	2.20	1.21	0.736		
4T-3872/3820	53	46	73	81	3.5	3.3	8.1	0.40	1.49	0.82	0.902		
4T-14139/14276	43.5	41.5	60	63	1.3	1.3	4.1	0.38	1.57	0.86	0.33		
4T-L68149†/L68111††	45.5	39	53	56	*	1.3	2.5	0.42	1.44	0.79	0.179		
4T-LM78349A†/LM78310A††	42	39.5	54	59	1.5	1.5	2.4	0.44	1.35	0.74	0.206		
4T-LM78349†/LM78310C††	46	40	56	59	*	1.5	2.4	0.44	1.35	0.74	0.218		
#4T-JS3549A/J53510	47	42	60	66.5	2	1.5	3.6	0.55	1.10	0.60	0.42		
4T-26883/26822	42.5	42	71	74	0.8	0.8	7.4	0.32	1.88	1.04	0.61		
4T-339/332	42.5	41.5	73	75	0.8	1.3	6.6	0.27	2.20	1.21	0.534		
4T-HM88648/HM88610	54	42.5	60	69	3.5	2.3	4.6	0.55	1.10	0.60	0.477		
4T-HM88648/HM88611AS	54	42.5	59	69	3.5	3.3	3.0	0.55	1.10	0.60	0.482		
4T-25880/25821	44	42	65	68	1.5	0.8	8.1	0.29	2.07	1.14	0.456		
4T-2780/2720	44.5	42.5	66	70	1.5	3.3	7.8	0.30	1.98	1.09	0.516		
4T-HM89448/HM89410	48.5	44.3	62	73	0.8	3.3	5.8	0.55	1.10	0.60	0.628		
4T-HM89449/HM89411	57	44.3	65	73	3.5	0.8	5.8	0.55	1.10	0.60	0.63		
4T-31597/31520	51	44.5	64	72	3.5	3.3	7.8	0.40	1.49	0.82	0.606		
4T-HM89249/HM89210	55	44	66	75	3.5	3.3	5.8	0.55	1.10	0.60	0.689		
4T-3479/3420	45.5	44.5	67	74	0.8	3.3	8.7	0.37	1.64	0.90	0.707		
4T-44143/44348	54	50	75	84	2.3	1.5	-2.9	0.78	0.77	0.42	0.73		
#4T-JL69349/JL69310	46.5	42.5	56	60	*	1.3	2.3	0.42	1.44	0.79	0.2		
4T-13889/13830	45	42.5	59	60	1.5	0.8	0.8	0.35	1.73	0.95	0.148		
4T-LM29748/LM29710	49	42.5	58.9	62	*	1.3	4.3	0.33	1.80	0.99	0.227		
4T-13685/13621	49.5	43	61	65	3.5	2.3	3.0	0.40	1.49	0.82	0.294		
4T-13687/13621	46.5	43	61	65	2	2.3	3.0	0.40	1.49	0.82	0.296		
4T-19150/19281	45	43	63	66	1.5	1.5	1.4	0.44	1.35	0.74	0.241		
4T-16150/16282	49.5	43	63	67	3.5	1.5	4.2	0.40	1.49	0.82	0.331		

2) Bearing numbers marked with "#" designate J-series bearings. The tolerance of these bearings is listed in Table 6.8 on page A-66 to A-67.
3) Chamfer dimensions of the bearings marked with "*" are shown in the above drawings.
4) Dimensions with "-" indicate a load center at the outside on the end of an inner ring.

Tapered Roller Bearings

Inch series

NTN




d 38.100–41.275 mm

Boundary dimensions					Basic load rating		Allowable speed	
mm					dynamic kN	static	min ⁻¹	
d	D	T	B	C	C _r	C _{0r}	Grease lubrication	Oil lubrication
38.100	76.200	20.638	20.940	15.507	61.5	63.0	5 000	6 700
	76.200	23.812	25.654	19.050	81.0	90.5	5 100	6 800
	76.200	23.812	25.654	19.050	81.0	90.5	5 100	6 800
	79.375	23.812	25.400	19.050	85.0	97.5	4 800	6 400
	79.375	29.370	29.771	23.812	103	114	4 900	6 600
	80.000	21.006	20.940	15.875	61.5	63.0	5 000	6 700
	80.035	24.608	23.698	18.512	74.5	82.5	4 800	6 400
	82.550	29.370	28.575	23.020	96.5	117	4 700	6 200
	82.931	23.812	25.400	19.050	84.5	98.0	4 500	6 000
	85.725	30.162	30.162	23.812	116	132	4 500	6 000
39.688	87.312	30.162	30.886	23.812	104	117	4 400	5 900
	88.500	25.400	23.698	17.462	78.5	78.0	4 000	5 300
	88.500	26.988	29.083	22.225	106	107	4 600	6 100
	76.200	23.812	25.654	19.050	81.0	90.5	5 100	6 800
	77.534	29.370	30.391	23.812	105	112	4 800	6 400
40.000	79.375	23.812	25.400	19.050	85.0	97.5	4 800	6 400
	80.035	29.370	30.391	23.812	105	112	4 800	6 400
	80.167	29.370	30.391	23.812	105	112	4 800	6 400
	88.500	26.988	29.083	22.225	106	107	4 600	6 100
	107.950	36.512	36.957	28.575	157	177	3 600	4 800
40.483	82.550	29.370	28.575	23.020	96.5	117	4 700	6 200
40.988	67.975	17.500	18.000	13.500	51.0	62.5	5 300	7 000
41.275	73.025	16.667	17.462	12.700	51.0	55.5	5 000	6 600
	73.431	19.558	19.812	14.732	62.0	69.5	5 000	6 600
	73.431	21.430	19.812	16.604	62.0	69.5	5 000	6 600
	76.200	18.009	17.384	14.288	47.0	51.5	4 900	6 500
	76.200	22.225	23.020	17.462	72.0	80.5	4 900	6 500
	76.200	25.400	25.400	20.638	85.0	97.5	4 800	6 400
	79.378	23.812	25.400	19.050	85.0	97.5	4 800	6 400
	80.000	18.009	17.384	14.288	47.0	51.5	4 900	6 500

Note: Chamfer dimensions on the back face of the inner and outer rings of the bearing are larger than the maximum values of installation-related dimensions r_{1a} and r_{1b} .
 1) As for the maximum value for inner and outer ring diameters of bearings whose bearing numbers are marked with "†" (inner ring) and "††" (outer ring), the precision class is an integer for Class 4 and Class 2 bearings only.

Tapered Roller Bearings

NTN

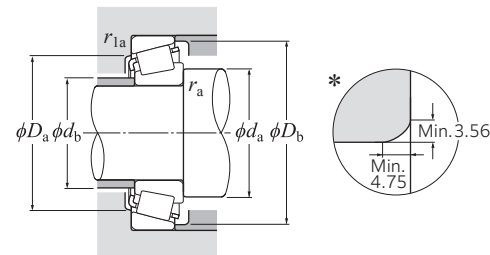

Dynamic equivalent radial load

$$P_r = XF_r + YF_a$$

$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
X	Y	X	Y
1	0	0.4	Y_2

Static equivalent radial load

$$P_{0r} = 0.5F_r + Y_0F_a$$

When $P_{0r} < F_r$ use $P_{0r} = F_r$.

For values of e , Y_2

and Y_0 see the table below.

Bearing number ¹⁾	Installation-related dimensions						Load center ³⁾ mm	Constant	Axial load factors		Mass kg
	mm								Y ₂	Y ₀	
	d _a	d _b	D _a	D _b	r _{as} ²⁾ Max.	r _{las} Max.					
4T-28150/28300	45.5	43.5	68	71	1.5	1.3	4.8	0.40	1.49	0.82	0.406
4T-2776/2720	52	43.5	66	70	4.3	0.8	7.8	0.30	1.98	1.09	0.495
4T-2788/2720	50	43.5	66	70	3.5	3.3	7.8	0.30	1.98	1.09	0.494
4T-26878/26822	45	44.5	71	74	0.8	0.8	7.4	0.32	1.88	1.04	0.575
4T-3490/3420	52	45.5	67	74	3.5	3.3	8.7	0.37	1.64	0.90	0.688
4T-28150/28315	45.5	43.5	69	73	1.5	1.5	4.8	0.40	1.49	0.82	0.467
4T-27880/27820	48	47	68	75	0.8	1.5	2.5	0.56	1.07	0.59	0.567
4T-HM801346/HM801310	51	49.1	68	78	0.8	3.3	4.7	0.55	1.10	0.60	0.767
4T-25572/25520	46	46	74	77	0.8	0.8	6.2	0.33	1.79	0.99	0.646
4T-3875/3820	49.5	48.5	73	81	0.8	3.3	8.1	0.40	1.49	0.82	0.861
4T-3580/3525	48	45.5	75	81	1.5	3.3	10.0	0.31	1.96	1.08	0.881
4T-44150/44348	55	50.8	75	84	2.3	1.5	-2.9	0.78	0.77	0.42	0.714
4T-418/414	51	44.5	77	80	3.5	1.5	9.1	0.26	2.28	1.25	0.843
4T-2789/2720	52	45	66	70	3.5	3.3	7.8	0.30	1.98	1.09	0.475
4T-3382/3321	52	45.5	68	75	3.5	3.3	11.2	0.27	2.20	1.21	0.669
4T-26880/26822	48	45.5	71	74	1.5	0.8	7.4	0.32	1.88	1.04	0.556
4T-3382/3339	52	45.5	71	74.8	3.5	1.5	11.2	0.27	2.20	1.21	0.666
4T-3386/3320	46.5	45.5	70	75	0.8	3.3	11.2	0.27	2.20	1.21	0.672
4T-44158/44348	58	50.8	75	84	3.5	1.5	-2.9	0.78	0.77	0.42	0.691
4T-28158/28300	47.5	45	68	71	1.5	1.3	4.8	0.40	1.49	0.82	0.387
4T-344/332	52	45.5	73	75	3.5	1.3	6.6	0.27	2.20	1.21	0.479
4T-350A/354A	47.5	46.5	77	80	0.8	1.3	5.1	0.31	1.96	1.08	0.566
4T-420/414	52	46	77	80	3.5	1.5	9.1	0.26	2.28	1.25	0.817
4T-543/532X	57	50	94	100	3.5	3.3	12.3	0.30	2.02	1.11	1.77
4T-HM801349/HM801310	58	49.1	68	78	3.5	3.3	4.7	0.55	1.10	0.60	0.734
4T-LM300849†/LM300811††	52	45.5	61	65	*	1.5	3.6	0.35	1.72	0.95	0.232
4T-18590/18520	53	46	66	69	3.5	1.5	2.9	0.35	1.71	0.94	0.283
4T-LM501349/LM501310	54	48	67	70	3.5	0.8	3.3	0.40	1.50	0.83	0.334
4T-LM501349/LM501314	54	48	65	70	3.5	0.8	3.3	0.40	1.50	0.83	0.354
4T-11162/11300	49	46.5	67	71	1.5	1.5	0.7	0.49	1.23	0.68	0.337
4T-24780/24720	54	47	68	72	3.5	0.8	4.5	0.39	1.53	0.84	0.435
4T-26882/26823	54	47	69	73	3.5	1.5	7.4	0.32	1.88	1.04	0.49
4T-26885/26822	48	47	71	74	0.8	0.8	7.4	0.32	1.88	1.04	0.535
4T-11162/11315	49	46.5	69	73	1.5	1.5	0.7	0.49	1.23	0.68	0.389


2) Chamfer dimensions of the bearings marked "*" are shown in the above drawings.

3) Dimensions with "-" indicate a load center at the outside on the end of an inner ring.

Tapered Roller Bearings

Inch series

NTN




d 41.275–44.450 mm

Boundary dimensions					Basic load rating		Allowable speed	
mm					dynamic	static	min ⁻¹	
d	D	T	B	C	C _r	C _{0r}	Grease lubrication	Oil lubrication
41.275	80.000	21.000	22.403	17.826	75.5	75.0	4 700	6 300
	79.378	23.812	25.400	19.050	85.0	97.5	4 800	6 400
	82.550	26.543	25.654	20.193	89.0	104	4 600	6 100
	85.725	30.162	30.162	23.812	116	132	4 500	6 000
	87.312	30.162	30.886	23.812	104	117	4 400	5 900
	88.900	30.162	29.370	23.020	104	125	4 300	5 800
	90.488	39.688	40.386	33.338	151	175	4 300	5 800
	92.075	26.195	23.812	16.670	80.5	81.5	3 800	5 000
	93.662	31.750	31.750	26.195	115	131	4 100	5 500
	95.250	30.162	29.370	23.020	120	147	4 000	5 300
42.070	95.250	30.958	28.300	20.638	91.5	92.0	3 700	5 000
	95.250	30.958	28.575	22.225	107	116	3 700	4 900
42.862	82.550	26.195	26.988	20.638	83.5	97.0	4 600	6 100
	82.931	23.812	25.400	19.050	84.5	98.0	4 500	6 000
	87.312	30.162	30.886	23.812	104	117	4 400	5 900
42.875	79.375	23.812	25.400	19.050	85.0	97.5	4 800	6 400
	82.931	23.812	25.400	19.050	84.5	98.0	4 500	6 000
44.450	76.992	17.462	17.145	11.908	48.5	54.0	4 700	6 300
	79.375	17.462	17.462	13.495	50.5	56.0	4 600	6 200
	82.931	23.812	25.400	19.050	84.5	98.0	4 500	6 000
	82.931	23.812	25.400	19.050	84.5	98.0	4 500	6 000
	84.138	30.162	30.886	23.812	104	117	4 400	5 900
	85.000	20.638	21.692	17.462	77.5	79.5	4 400	5 800
	87.312	30.162	30.886	23.812	104	117	4 400	5 900
	88.900	30.162	29.370	23.020	104	125	4 300	5 800
	93.264	30.162	30.302	23.812	113	134	4 000	5 300
	93.662	31.750	31.750	26.195	115	131	4 100	5 500
	95.250	27.783	28.575	22.225	119	139	3 900	5 200
	95.250	27.783	29.900	22.225	120	129	4 200	5 600
	95.250	30.162	29.370	23.020	120	147	4 000	5 300
	95.250	30.958	28.300	20.638	91.5	92.0	3 700	5 000
	95.250	30.958	28.575	22.225	107	116	3 700	4 900
	101.600	34.925	36.068	26.988	150	165	3 800	5 000
	104.775	30.162	29.317	24.605	127	148	3 500	4 700

Note: Chamfer dimensions on the back face of the inner and outer rings of the bearing are larger than the maximum values of installation-related dimensions r_{as} and r_{1as} .

Tapered Roller Bearings

NTN



Dynamic equivalent radial load

$$P_r = XF_r + YF_a$$

$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
X	Y	X	Y
1	0	0.4	Y_2

Static equivalent radial load

$$P_{0r} = 0.5F_r + Y_0F_a$$

When $P_{0r} < F_r$ use $P_{0r} = F_r$.

For values of e , Y_2

and Y_0 see the table below.


Bearing number	Installation-related dimensions						Load center ¹⁾ mm	Constant	Axial load factors		Mass kg
	mm								e	Y_2	
	d_a	d_b	D_a	D_b	r_{as} Max.	r_{1as} Max.					
4T-336/332	47	46	73	75	0.8	1.3	6.6	0.27	2.20	1.21	0.468
4T-26882/26824	54	47	70	74	3.5	0.8	7.4	0.32	1.88	1.04	0.532
4T-M802048/M802011	57	50.6	70	79	3.5	3.3	3.2	0.55	1.10	0.60	0.641
4T-3880/3820	52	50	73	81	0.8	3.3	8.1	0.40	1.49	0.82	0.814
4T-3576/3525	49	48	75	81	0.8	3.3	10.0	0.31	1.96	1.08	0.83
4T-HM803145/HM803110	54	53	74	85	0.8	3.3	4.6	0.55	1.10	0.60	0.902
4T-4388/4335	60	52	77	85	3.5	3.3	15.0	0.28	2.11	1.16	1.26
4T-M903345/M903310	65	54	78	88	3.5	1.5	-3.6	0.83	0.72	0.40	0.758
4T-46162/46368	52	51	79	87	0.8	3.3	7.1	0.40	1.49	0.82	1.09
4T-HM804840/HM804810	61	54	81	91	3.5	3.3	3.7	0.55	1.10	0.60	1.08
4T-53162/53375	57	52.7	81	89	1.5	0.8	0.5	0.74	0.81	0.45	0.974
4T-HM903245/HM903210	63	54	81	91	3.5	0.8	-0.4	0.74	0.81	0.45	1.05
4T-4395/4335	60	52	77	85	3.5	3.3	15.0	0.28	2.11	1.16	1.24
4T-22780/22720	56	50	71	77	3.5	3.3	6.4	0.40	1.49	0.82	0.618
4T-25578/25520	53	49.5	74	77	2.3	0.8	6.2	0.33	1.79	0.99	0.584
4T-3579/3525	56	49.5	75	81	3.5	3.3	10.0	0.31	1.96	1.08	0.807
4T-26884/26822	55	48.5	71	74	3.5	0.8	7.4	0.32	1.88	1.04	0.511
4T-25577/25520	55	49	74	77	3.5	0.8	6.2	0.33	1.79	0.99	0.582
4T-12175/12303	52	49.5	68	73	1.5	1.5	-0.2	0.51	1.19	0.65	0.308
4T-18685/18620	54	49.5	71	74	2.8	1.5	2.2	0.37	1.60	0.88	0.347
4T-25580/25520	57	50	74	77	3.5	0.8	6.2	0.33	1.79	0.99	0.56
4T-25582/25520	60	50	74	77	5	0.8	6.2	0.33	1.79	0.99	0.564
4T-3578/3520	57	51	74	79.5	3.5	3.3	10.0	0.31	1.96	1.08	0.701
4T-355/354A	54	50	77	80	2.3	1.3	5.1	0.31	1.96	1.08	0.511
4T-3578/3525	57	51	75	81	3.5	3.3	10.0	0.31	1.96	1.08	0.78
4T-HM803149/HM803110	62	53.4	74	85	3.5	3.3	4.6	0.55	1.10	0.60	0.85
4T-3782/3720	58	52	82	87.9	3.5	3.3	8.3	0.34	1.77	0.97	0.959
4T-46175/46368	55	54	79	87	0.8	3.3	7.1	0.40	1.49	0.82	1.04
4T-33885/33821	53	53	85	90	0.8	2.3	8.0	0.33	1.82	1.00	0.986
4T-438/432	57	51	83	87	3.5	2.3	9.2	0.28	2.11	1.16	0.957
4T-HM804842/HM804810	57	57	81	91	0.8	3.3	3.7	0.55	1.10	0.60	1.04
4T-53177/53375	63	52.7	81	89	3.5	0.8	0.5	0.74	0.81	0.45	0.93
4T-HM903249/HM903210	65	54	81	91	3.5	0.8	-0.4	0.74	0.81	0.45	0.999
4T-527/522	59	53	89	95	3.5	3.3	12.9	0.29	2.10	1.16	1.36
4T-460/453X	60	54	92	98	3.5	3.3	7.1	0.34	1.79	0.98	1.29

1) Dimensions with "—" indicate a load center at the outside on the end of an inner ring.

Tapered Roller Bearings

Inch series

NTN




d 44.450–47.625 mm

d	Boundary dimensions				Basic load rating		Allowable speed	
	mm				dynamic kN	static C _{0r}	min ⁻¹ Grease lubrication	Oil lubrication
	D	T	B	C	C _r	C _{0r}		
44.450	104.775	30.162	30.958	23.812	144	169	3 500	4 700
	104.775	36.512	36.512	28.575	153	189	3 600	4 800
	111.125	30.162	26.909	20.638	115	136	3 200	4 200
	111.125	30.162	26.909	20.638	115	136	3 200	4 200
	127.000	50.800	52.388	41.275	277	320	3 200	4 300
44.983	82.931	23.812	25.400	19.050	84.5	98.0	4 500	6 000
	93.264	30.162	30.302	23.812	113	134	4 000	5 300
45.000	85.000	20.638	21.692	17.462	77.5	79.5	4 400	5 800
	88.900	20.638	22.225	16.513	85.0	90.5	4 100	5 500
45.237	87.312	30.162	30.886	23.812	104	117	4 400	5 900
45.242	73.431	19.558	19.812	15.748	60.0	76.0	4 800	6 400
	77.788	19.842	19.842	15.080	63.5	73.5	4 600	6 200
45.618	82.550	23.812	25.400	19.050	84.5	98.0	4 500	6 000
	82.931	23.812	25.400	19.050	84.5	98.0	4 500	6 000
	83.058	23.876	25.400	19.114	84.5	98.0	4 500	6 000
	85.000	23.812	25.400	19.050	84.5	98.0	4 500	6 000
45.987	74.976	18.000	18.000	14.000	56.5	71.0	4 700	6 300
46.038	79.375	17.462	17.462	13.495	50.5	56.0	4 600	6 200
	82.931	23.812	25.400	19.050	84.5	98.0	4 500	6 000
	85.000	20.638	21.692	17.462	77.5	79.5	4 400	5 800
	85.000	25.400	25.608	20.638	87.5	104	4 400	5 800
	90.119	23.000	21.692	21.808	77.5	79.5	4 400	5 800
	93.264	30.162	30.302	23.812	113	134	4 000	5 300
	95.250	27.783	29.900	22.225	120	129	4 200	5 600
47.625	88.900	20.638	22.225	16.513	85.0	90.5	4 100	5 500
	88.900	25.400	25.400	19.050	91.0	101	4 200	5 600
	93.264	30.162	30.302	23.812	113	134	4 000	5 300
	95.250	30.162	29.370	23.020	120	147	4 000	5 300
	96.838	21.000	21.946	15.875	86.5	96.5	3 700	5 000
	101.600	34.925	36.068	26.988	150	165	3 800	5 000
	104.775	30.162	29.317	24.605	127	148	3 500	4 700

Note: Chamfer dimensions on the back face of the inner and outer rings of the bearing are larger than the maximum values of installation-related dimensions r_{1a} and r_{1as} .
 1) As for the maximum value for inner and outer ring diameters of bearings whose bearing numbers are marked with "†" (inner ring) and "††" (outer ring), the precision class is an integer for Class 4 and Class 2 bearings only.

Tapered Roller Bearings

NTN

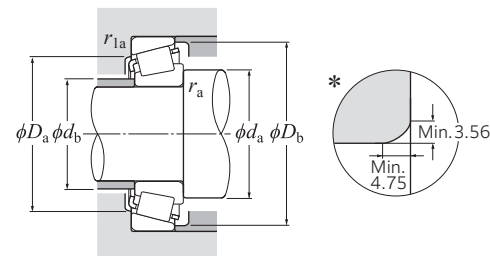

Dynamic equivalent radial load

$$P_r = XF_r + YF_a$$

$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
X	Y	X	Y
1	0	0.4	Y_2

Static equivalent radial load

$$P_{0r} = 0.5F_r + Y_0F_a$$

When $P_{0r} < F_r$ use $P_{0r} = F_r$.

For values of e , Y_2

and Y_0 see the table below.

Bearing number ¹⁾	Installation-related dimensions						Load center ³⁾ mm	Constant	Axial load factors		Mass kg
	mm								Y ₂	Y ₀	
	d _a	d _b	D _a	D _b	r _{as} ²⁾ Max.	r _{las} Max.					
	a	e							(approx.)		
4T-45280/45220	55	54	93	99	0.8	3.3	7.9	0.33	1.80	0.99	1.33
4T-HM807040/HM807010	66	59	89	100	3.5	3.3	7.4	0.49	1.23	0.68	1.62
4T-55175C/55437	70	64	92	105	3.5	3.3	-7.4	0.88	0.68	0.37	1.45
4T-55176C/55437	71	65	92	105	0.8	3.3	-7.4	0.88	0.68	0.37	1.09
4T-6277/6220	67	60	108	117	3.5	3.3	19.5	0.30	2.01	1.11	3.59
4T-25584/25520	53	51	74	77	1.5	0.8	6.2	0.33	1.79	0.99	0.556
4T-3776/3720	59	53	82	87.9	3.5	3.3	8.3	0.34	1.77	0.97	0.95
4T-358/354A	53	50	77	80	1.5	1.3	5.1	0.31	1.96	1.08	0.505
4T-367/362A	55	51	81	84	2	1.3	4.0	0.32	1.88	1.03	0.6
4T-3586/3525	58	52	75	81	3.5	3.3	10.0	0.31	1.96	1.08	0.767
4T-LM102949/LM102910	56	50	68	70	3.5	0.8	4.7	0.31	1.97	1.08	0.309
4T-LM603049/LM603011	58	52	71	74	3.5	0.8	2.2	0.43	1.41	0.77	0.371
4T-25590/25519	58	51	73	77	3.5	2	6.2	0.33	1.79	0.99	0.534
4T-25590/25520	58	51	74	77	3.5	0.8	6.2	0.33	1.79	0.99	0.544
4T-25590/25522	58	51	73	77	3.5	2	6.2	0.33	1.79	0.99	0.545
4T-25590/25526	58	51	74	78	3.5	2.3	6.2	0.33	1.79	0.99	0.581
4T-LM503349A†/LM503310††	57	51	67	71	*	1.5	1.9	0.40	1.49	0.82	0.298
4T-18690/18620	56	51	71	74	2.8	1.5	2.2	0.37	1.60	0.88	0.331
4T-25592/25520	58	52	74	77	3.5	0.8	6.2	0.33	1.79	0.99	0.538
4T-359A/354A	57	51	77	80	3.5	1.3	5.1	0.31	1.96	1.08	0.489
4T-2984/2924	58	52	76	80	3.5	1.3	6.4	0.35	1.73	0.95	0.616
4T-359S/352	55	51	78	82	2.3	2.3	5.1	0.31	1.96	1.08	0.654
4T-3777/3720	60	53	82	87.9	3.5	3.3	8.3	0.34	1.77	0.97	0.934
4T-436/432	59	52	83	87	3.5	2.3	9.2	0.28	2.11	1.16	0.93
4T-369A/362A	60	53	81	84	3.5	1.3	4.0	0.32	1.88	1.03	0.564
4T-M804048/M804010	59	56	77	85	0.8	3.3	1.7	0.55	1.10	0.60	0.664
4T-3778/3720	67	55	82	87.9	6.4	3.3	8.3	0.34	1.77	0.97	0.896
4T-HM804846/HM804810	66	57	81	91	3.5	3.3	3.7	0.55	1.10	0.60	0.979
4T-386A/382A	56	55	89	92	0.8	0.8	3.1	0.35	1.69	0.93	0.719
4T-528/522	62	55	89	95	3.5	3.3	12.9	0.29	2.10	1.16	1.3
4T-463/453X	65	56	92	98	4.8	3.3	7.1	0.34	1.79	0.98	1.24


2) Chamfer dimensions of the bearings marked "*" are shown in the above drawings.

3) Dimensions with "-" indicate a load center at the outside on the end of an inner ring.

● Tapered Roller Bearings

NTN

Inch series
J series




d 47.625–50.800 mm

Boundary dimensions					Basic load rating		Allowable speed	
mm					dynamic kN	static C _{0r}	min ⁻¹	
d	D	T	B	C	C _r	C _{0r}	Grease lubrication	Oil lubrication
47.625	104.775	30.162	30.958	23.812	144	169	3 500	4 700
	111.125	30.162	26.909	20.638	115	136	3 200	4 200
	123.825	36.512	32.791	25.400	171	188	2 900	3 900
48.412	95.250	30.162	29.370	23.020	120	147	4 000	5 300
	95.250	30.162	29.370	23.020	120	147	4 000	5 300
49.212	93.264	30.162	30.302	23.812	113	134	4 000	5 300
	103.188	43.658	44.475	36.512	193	232	3 800	5 000
	104.775	36.512	36.512	28.575	153	189	3 600	4 800
	114.300	44.450	44.450	34.925	206	225	3 600	4 800
	114.300	44.450	44.450	36.068	226	261	3 500	4 700
49.987	82.550	21.590	22.225	16.510	77.5	94.0	4 300	5 700
	92.075	24.608	25.400	19.845	93.0	116	4 000	5 300
	114.300	44.450	44.450	36.068	226	261	3 500	4 700
50.000	82.000	21.500	21.500	17.000	77.5	94.0	4 300	5 700
	84.000	22.000	22.000	17.500	77.5	94.5	4 300	5 700
	88.900	20.638	22.225	16.513	85.0	90.5	4 100	5 500
	88.900	20.638	22.225	16.513	85.0	90.5	4 100	5 500
	90.000	28.000	28.000	23.000	118	141	4 100	5 400
	105.000	37.000	36.000	29.000	153	189	3 600	4 800
	110.000	22.000	21.996	18.824	99.5	120	3 200	4 300
50.800	82.550	21.590	22.225	16.510	77.5	94.0	4 300	5 700
	85.000	17.462	17.462	13.495	55.0	65.0	4 200	5 600
	88.900	17.462	17.462	13.495	55.0	65.0	4 200	5 600
	88.900	20.638	22.225	16.513	85.0	90.5	4 100	5 500
	88.900	20.638	22.225	16.513	85.0	90.5	4 100	5 500
	90.000	20.000	22.225	15.875	85.0	90.5	4 100	5 500
	92.075	24.608	25.400	19.845	93.0	116	4 000	5 300
	93.264	30.162	30.302	23.812	113	134	4 000	5 300
	93.264	30.162	30.302	23.812	113	134	4 000	5 300
	95.250	27.783	28.575	22.225	119	139	3 900	5 200
	95.250	30.162	30.302	23.812	113	134	4 000	5 300
	96.838	21.000	21.946	15.875	86.5	96.5	3 700	5 000
	97.630	24.608	24.608	19.446	98.0	128	3 700	4 900
	98.425	30.162	30.302	23.812	113	134	4 000	5 300

Note: Chamfer dimensions on the back face of the inner and outer rings of the bearing are larger than the maximum values of installation-related dimensions r_{1a} and r_{1b} .
1) As for the maximum value for inner ring bore diameters of bearings whose bearing numbers are marked with "*" (inner ring), the precision class is an integer for Class 4 and Class 2 bearings only.

● Tapered Roller Bearings

NTN



Dynamic equivalent radial load
 $P_r = XF_r + YF_a$

$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
X	Y	X	Y
1	0	0.4	Y_2

Static equivalent radial load

$$P_{0r} = 0.5F_r + Y_0F_a$$

When $P_{0r} < F_r$ use $P_{0r} = F_r$.

For values of e , Y_2

and Y_0 see the table below.

Bearing number ¹⁾²⁾	Installation-related dimensions						Load center ³⁾ mm	Constant e	Axial load factors		Mass kg (approx.)
	d_a	d_b	D_a	D_b	r_{as} Max.	r_{1as} Max.			Y_2	Y_0	
4T-45282/45220	63	57	93	99	3.5	3.3	7.9	0.33	1.80	0.99	1.33
4T-55187C/55437	69	62	92	105	3.5	3.3	-7.4	0.88	0.68	0.37	1.4
4T-72188C/72487	69	67	102	116	0.8	3.3	-1.5	0.74	0.81	0.45	2.16
4T-HM804848/HM804810	63	57	81	91	2.3	3.3	3.7	0.55	1.10	0.60	0.967
4T-HM804849/HM804810	66	57	81	91	3.5	3.3	3.7	0.55	1.10	0.60	0.965
4T-3781/3720	62	56	82	87.9	3.5	3.3	8.3	0.34	1.77	0.97	0.876
4T-5395/5335	66	60	89	97	3.5	3.3	16.1	0.30	2.02	1.11	1.75
4T-HM807044/HM807010	69	63	89	100	3.5	3.3	7.4	0.49	1.23	0.68	1.52
4T-65390/65320	70	60	97	107	3.5	3.3	12.5	0.43	1.39	0.77	2.23
4T-HH506348/HH506310	71	61	97	107	3.5	3.3	13.3	0.40	1.49	0.82	2.33
4T-LM104947A/LM104911	55	55	75	78	0.5	1.3	5.8	0.31	1.97	1.08	0.434
4T-28579†/28521	60	56	83	87	2.3	0.8	4.6	0.38	1.59	0.87	0.718
4T-HH506349†/HH506310	72	61	97	107	3.5	3.3	13.3	0.40	1.49	0.82	2.31
#4T-JLM104948/JLM104910	61	55	76	78	3	0.5	5.4	0.31	1.97	1.08	0.42
#4T-JLM704649/JLM704610	64	56	76	80	3.5	1.5	2.3	0.44	1.37	0.75	0.466
4T-365/362A	58	55	81	84	2	1.3	4.0	0.32	1.88	1.03	0.534
4T-366/362A	59	55	81	84	2.3	1.3	4.0	0.32	1.88	1.03	0.53
#4T-JM205149/JM205110	63	57	80	85	3	2.5	7.4	0.33	1.82	1.00	0.755
#4T-JHM807045/JHM807012	69	63	90	100	3	2.5	7.5	0.49	1.23	0.68	1.52
4T-396/394A	61	60	101	105	0.8	1.3	0.7	0.40	1.49	0.82	1.07
4T-LM104949/LM104911	63	56	75	78	3.5	1.3	5.8	0.31	1.97	1.08	0.418
4T-18790/18720	62	56	77	80	3.5	1.5	0.8	0.41	1.48	0.81	0.375
4T-18790/18724	62	56	78	82	3.5	1.5	0.8	0.41	1.48	0.81	0.431
4T-368/362A	58	56	81	84	1.5	1.3	4.0	0.32	1.88	1.03	0.524
4T-370A/362A	65	56	81	84	5	1.3	4.0	0.32	1.88	1.03	0.516
4T-368A/362	62	56	81	84	3.5	2	4.0	0.32	1.88	1.03	0.53
4T-28580/28521	63	57	83	87	3.5	0.8	4.6	0.38	1.59	0.87	0.703
4T-3775/3720	58	58	82	87.9	0.8	3.3	8.3	0.34	1.77	0.97	0.85
4T-3780/3720	64	58	82	87.9	3.5	3.3	8.3	0.34	1.77	0.97	0.846
4T-33889/33821	64	58	85	90	3.5	2.3	8.0	0.33	1.82	1.00	0.878
4T-3780/3726	64	58	83.1	88.9	3.5	3.3	8.3	0.34	1.77	0.97	0.899
4T-385A/382A	61	60	89	92	2.3	0.8	3.1	0.35	1.69	0.93	0.675
4T-28678/28622	65	58	88	92	3.5	0.8	3.3	0.40	1.49	0.82	0.854
4T-3780/3732	64	58	84.1	89.9	3.5	3.3	8.3	0.34	1.77	0.97	0.99


2) Bearing numbers marked with "#" designate J-series bearings. The tolerance of these bearings is listed in Table 6.8 on page A-66 to A-67.

3) Dimensions with "†" indicate a load center at the outside on the end of an inner ring.

Tapered Roller Bearings

NTN

Inch series
J series




d 50.800–55.000 mm

Boundary dimensions					Basic load rating		Allowable speed	
mm					dynamic kN	static C _{0r}	min ⁻¹	
d	D	T	B	C	C _r	C _{0r}	Grease lubrication	Oil lubrication
50.800	101.600	31.750	31.750	25.400	122	136	3 700	5 000
	101.600	34.925	36.068	26.988	150	165	3 800	5 000
	104.775	30.162	29.317	24.605	127	148	3 500	4 700
	104.775	30.162	30.958	23.812	144	169	3 500	4 700
	104.775	36.512	36.512	28.575	153	189	3 600	4 800
	104.775	36.512	36.512	28.575	158	178	3 700	4 900
	107.950	36.512	36.957	28.575	157	177	3 600	4 800
	111.125	30.162	28.575	20.638	115	136	3 200	4 200
	112.712	30.162	26.909	20.638	115	136	3 200	4 200
	112.712	30.162	30.048	23.812	132	174	3 200	4 300
	112.712	30.162	30.162	23.812	153	195	3 200	4 200
	117.475	33.338	31.750	23.812	144	153	3 300	4 400
	120.650	41.275	41.275	31.750	190	213	3 300	4 400
51.592	123.825	36.512	32.791	25.400	171	188	2 900	3 900
	123.825	38.100	36.678	30.162	175	216	3 000	4 100
52.388	88.900	20.638	22.225	16.513	85.0	90.5	4 100	5 500
52.388	92.075	24.608	25.400	19.845	93.0	116	4 000	5 300
	93.264	30.162	30.302	23.812	113	134	4 000	5 300
	95.250	27.783	28.575	22.225	119	139	3 900	5 200
53.975	88.900	19.050	19.050	13.492	67.5	82.5	4 000	5 300
	95.250	27.783	28.575	22.225	119	139	3 900	5 200
	96.838	21.000	21.946	15.875	86.5	96.5	3 700	5 000
	104.775	30.162	30.958	23.812	144	169	3 500	4 700
	104.775	36.512	36.512	28.575	153	189	3 600	4 800
	107.950	36.512	36.957	28.575	157	177	3 600	4 800
	120.650	41.275	41.275	31.750	190	213	3 300	4 400
	122.238	33.338	31.750	23.812	149	163	3 100	4 200
	122.238	43.658	43.764	36.512	215	283	3 100	4 100
	123.825	36.512	32.791	25.400	171	188	2 900	3 900
	123.825	38.100	36.678	30.162	175	216	3 000	4 100
	130.175	36.512	33.338	23.812	173	186	2 700	3 600
	140.030	36.512	33.236	23.520	190	212	2 600	3 400
54.488	104.775	36.512	36.512	28.575	153	189	3 600	4 800
55.000	90.000	23.000	23.000	18.500	86.0	109	3 900	5 300

Note: Chamfer dimensions on the back face of the inner and outer rings of the bearing are larger than the maximum values of installation-related dimensions r_{1as} and r_{1as} .

Tapered Roller Bearings

NTN



Dynamic equivalent radial load
 $P_r = XF_r + YF_a$

$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
X	Y	X	Y
1	0	0.4	Y_2

Static equivalent radial load

$$P_{0r} = 0.5F_r + Y_0F_a$$

When $P_{0r} < F_r$ use $P_{0r} = F_r$.

For values of e , Y_2

and Y_0 see the table below.

Bearing number ¹⁾	Installation-related dimensions						Load center ²⁾ mm	Constant	Axial load factors		Mass kg
	mm								Y ₂	Y ₀	
	d _a	d _b	D _a	D _b	r _{as} Max.	r _{1as} Max.					
	a	e									(approx.)
4T-49585/49520	66	59	88	96	3.5	3.3	7.1	0.40	1.50	0.82	1.13
4T-529/522	61	60	89	95	0.8	3.3	12.9	0.29	2.10	1.16	1.23
4T-455/453X	60	59	92	98	0.8	3.3	7.1	0.34	1.79	0.98	1.19
4T-45284/45220	71	59	93	99	6.4	3.3	7.9	0.33	1.80	0.99	1.24
4T-HM807046/HM807010	70	63.1	89	100	3.5	3.3	7.4	0.49	1.23	0.68	1.48
4T-59200/59412	68	61	92	99	3.5	3.3	9.6	0.40	1.49	0.82	1.44
4T-537/532X	65	59	94	100	3.5	3.3	12.3	0.30	2.02	1.11	1.55
4T-HM907643/HM907614	74	65.3	91	105	3.5	3.3	-7.2	0.88	0.68	0.37	1.36
4T-55200C/55443	71	64.4	92	106	3.5	3.3	-7.4	0.88	0.68	0.37	1.34
4T-3975/3920	68	61	99	106	3.5	3.3	4.5	0.40	1.49	0.82	1.53
4T-39575/39520	68	61	101	107	3.5	3.3	6.6	0.34	1.77	0.97	1.54
4T-66200/66462	71	65	100	111	3.5	3.3	0.4	0.63	0.96	0.53	1.68
4T-619/612	67	61	105	110	3.5	3.3	14.4	0.31	1.91	1.05	2.3
4T-72200C/72487	77	67	102	116	3.5	3.3	-1.5	0.74	0.81	0.45	2.1
4T-555/552A	66	62	109	116	2.3	3.3	9.4	0.35	1.73	0.95	2.34
4T-368S/362A	59	56	81	84	2	1.3	4.0	0.32	1.88	1.03	0.512
4T-28584/28521	65	58	83	87	3.5	0.8	4.6	0.38	1.59	0.87	0.703
4T-3767/3720	63	59	82	87.9	2.3	3.3	8.3	0.34	1.77	0.97	0.817
4T-33890/33821	61	59	85	90	1.5	2.3	8.0	0.33	1.82	1.00	0.851
4T-LM806649/LM806610	65	61	80	85	2.3	2	-2.2	0.55	1.10	0.60	0.437
4T-33895/33822	63	60	86	90	1.5	0.8	8.0	0.33	1.82	1.00	0.823
4T-389A/382A	61	60	89	92	0.8	0.8	3.1	0.35	1.69	0.93	0.632
4T-45287/45220	62	62	93	99	0.8	3.3	7.9	0.33	1.80	0.99	1.17
4T-HM807049/HM807010	73	63.1	89	100	3.5	3.3	7.4	0.49	1.23	0.68	1.41
4T-539/532X	68	61	94	100	3.5	3.3	12.3	0.30	2.02	1.11	1.47
4T-621/612	70	63	105	110	3.5	3.3	14.4	0.31	1.91	1.05	2.22
4T-66584/66520	75	68	105	116	3.5	3.3	-1.8	0.67	0.90	0.50	1.81
4T-5578/5535	73	67	106	116	3.5	3.3	13.3	0.36	1.67	0.92	2.64
4T-72212C/72487	79	67	102	116	3.5	3.3	-1.5	0.74	0.81	0.45	2.03
4T-5575/552A	73	67	109	116	3.5	3.3	9.4	0.35	1.73	0.95	2.25
4T-HM911242/HM911210	79	74	109	123.6	3.5	3.3	-5.2	0.82	0.73	0.40	2.28
4T-78214C/78551	79	77.5	117	132	0.8	2.3	-8.5	0.87	0.69	0.38	2.77
4T-HM807048/HM807010	73	63	89	100	3.5	3.3	7.4	0.49	1.23	0.68	1.4
#4T-JLM506849/JLM506810	63	61	82	86	1.5	0.5	2.8	0.40	1.49	0.82	0.556


1) Bearing numbers marked "#" designate J-series bearings. The tolerance of these bearings is listed in Table 6.8 on page A-66 to A-67.

2) Dimensions with "-" indicate a load center at the outside on the end of an inner ring.

Tapered Roller Bearings

NTN

Inch series
J series




d 55.000–60.000 mm

Boundary dimensions					Basic load rating		Allowable speed	
mm					dynamic kN	static C _{0r}	min ⁻¹ Grease lubrication	Oil lubrication
d	D	T	B	C	C _r	C _{0r}		
55.000	95.000	29.000	29.000	23.500	119	144	3 800	5 100
	96.838	21.000	21.946	15.875	86.5	96.5	3 700	5 000
	110.000	39.000	39.000	32.000	192	219	3 500	4 600
55.562	97.630	24.608	24.608	19.446	98.0	128	3 700	4 900
	123.825	36.512	32.791	25.400	171	188	2 900	3 900
	127.000	36.512	36.512	26.988	181	228	2 900	3 800
55.575	96.838	21.000	21.946	15.875	86.5	96.5	3 700	5 000
57.150	96.838	21.000	21.946	15.875	86.5	96.5	3 700	5 000
	96.838	21.000	21.946	15.875	86.5	96.5	3 700	5 000
	96.838	21.000	21.946	15.875	86.5	96.5	3 700	5 000
	96.838	21.000	21.946	15.875	86.5	96.5	3 700	5 000
	97.630	24.608	24.608	19.446	98.0	128	3 700	4 900
	104.775	30.162	29.317	24.605	127	148	3 500	4 700
	104.775	30.162	29.317	24.605	127	148	3 500	4 700
	104.775	30.162	30.958	23.812	144	169	3 500	4 700
	107.950	27.783	29.317	22.225	127	148	3 500	4 700
	110.000	22.000	21.996	18.824	99.5	120	3 200	4 300
	110.000	27.795	29.317	27.000	127	148	3 500	4 700
	112.712	30.162	30.048	23.812	132	174	3 200	4 300
	112.712	30.162	30.162	23.812	153	195	3 200	4 200
	112.712	30.162	30.162	23.812	153	195	3 200	4 200
	117.475	30.162	30.162	23.812	129	175	3 000	4 000
	117.475	33.338	31.750	23.812	144	153	3 300	4 400
	120.650	41.275	41.275	31.750	190	213	3 300	4 400
	123.825	36.512	32.791	25.400	171	188	2 900	3 900
	123.825	38.100	36.678	30.162	175	216	3 000	4 100
	140.030	36.512	33.236	23.520	190	212	2 600	3 400
57.531	96.838	21.000	21.946	15.875	86.5	96.5	3 700	5 000
59.972	122.238	33.338	31.750	23.812	149	163	3 100	4 200
59.987	146.050	41.275	39.688	25.400	220	234	2 400	3 200
60.000	95.000	24.000	24.000	19.000	92.5	122	3 700	4 900
	107.950	25.400	25.400	19.050	101	140	3 200	4 300

Note: Chamfer dimensions on the back face of the inner and outer rings of the bearing are larger than the maximum values of installation-related dimensions r_{1a} and r_{1as} .
1) As for the maximum value for inner ring bore diameters of bearings whose bearing numbers are marked with "*" (inner ring), the precision class is an integer for Class 4 and Class 2 bearings only.

Tapered Roller Bearings

NTN



Dynamic equivalent radial load
 $P_r = XF_r + YF_a$

$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
X	Y	X	Y
1	0	0.4	Y_2

Static equivalent radial load

$$P_{0r} = 0.5F_r + Y_0F_a$$

When $P_{0r} < F_r$ use $P_{0r} = F_r$.

For values of e , Y_2

and Y_0 see the table below.

Bearing number ¹⁾²⁾	Installation-related dimensions						Load center ³⁾ mm	Constant e	Axial load factors		Mass kg (approx.)
	d_a	d_b	D_a	D_b	r_{1as} Max.	r_{1as} Max.			Y_2	Y_0	
#4T-JM207049/JM207010	64	62	85	91	1.5	2.5	7.6	0.33	1.79	0.99	0.823
4T-385/382A	65	61	89	92	2.3	0.8	3.1	0.35	1.69	0.93	0.615
#4T-JH307749/JH307710	71	64	97	104	3	2.5	11.7	0.35	1.73	0.95	1.7
4T-28680/28622	68	62	88	92	3.5	0.8	3.3	0.40	1.49	0.82	0.776
4T-72218C/72487	80	67	102	116	3.5	3.3	-1.5	0.74	0.81	0.45	2
4T-HM813840/HM813810	78	72	111	121	3.5	3.3	3.7	0.50	1.20	0.66	2.34
4T-389/382A	65	61	89	92	2.3	0.8	3.1	0.35	1.69	0.93	0.606
4T-387/382A	67	63	89	92	2.3	0.8	3.1	0.35	1.69	0.93	0.582
4T-387A/382A	70	63	89	92	3.5	0.8	3.1	0.35	1.69	0.93	0.58
4T-387AS/382A	73	63	89	92	5	0.8	3.1	0.35	1.69	0.93	0.575
4T-387S/382A	64	63	89	92	0.8	0.8	3.1	0.35	1.69	0.93	0.584
4T-28682/28622	70	63	88	92	3.5	0.8	3.3	0.40	1.49	0.82	0.749
4T-462/453X	67	63	92	98	2.3	3.3	7.1	0.34	1.79	0.98	1.06
4T-469/453X	72	68	92	98	3.5	3.3	7.1	0.34	1.79	0.98	1.06
4T-45289/45220	65	65	93	99	0.8	3.3	7.9	0.33	1.80	0.99	1.1
4T-469/453A	72	68	97	100	3.5	0.8	7.1	0.34	1.79	0.98	1.11
4T-390/394A	70	66	101	105	2.3	1.3	0.7	0.40	1.49	0.82	0.961
4T-469/454	72	68	96	100	3.5	2	7.1	0.34	1.79	0.98	1.24
4T-3979/3920	72	66	99	106	3.5	3.3	4.5	0.40	1.49	0.82	1.41
4T-39580/39520	74	68	101	107	3.5	3.3	6.6	0.34	1.77	0.97	1.41
4T-39581/39520	81	66	101	107	8	3.3	6.6	0.34	1.77	0.97	1.4
4T-33225/33462	74	68	104	112	3.5	3.3	2.6	0.44	1.38	0.76	1.58
4T-66225/66462	76	68.9	100	111	3.5	3.3	0.4	0.63	0.96	0.53	1.54
4T-623/612	72	66	105	110	3.5	3.3	14.4	0.31	1.91	1.05	2.13
4T-72225C/72487	81	67	102	116	3.5	3.3	-1.5	0.74	0.81	0.45	1.96
4T-5555/552A	76	70	109	116	3.5	3.3	9.4	0.35	1.73	0.95	2.17
4T-78225/78551	83	77	117	132	3.5	2.3	-8.5	0.87	0.69	0.38	2.69
4T-388A/382A	70	63	89	92	3.5	0.8	3.1	0.35	1.69	0.93	0.574
4T-66589/66520	74	73	105	116	0.8	3.3	-1.8	0.67	0.90	0.50	1.66
4T-H913840†/H913810	97	82	124	138	3.5	3.3	-4.3	0.78	0.77	0.42	3.22
#4T-JLM508748/JLM508710	75	66	85	91	5	2.5	3.0	0.40	1.49	0.82	0.609
4T-29580/29520	75	68	96	103	3.5	3.3	0.6	0.46	1.31	0.72	0.992


2) Bearing numbers marked "#" designate J-series bearings. The tolerance of these bearings is listed in Table 6.8 on page A-66 to A-67.

3) Dimensions with "-" indicate a load center at the outside on the end of an inner ring.

● Tapered Roller Bearings

Inch series
J series

NTN




d 60.000–65.000 mm

d	Boundary dimensions				Basic load rating		Allowable speed	
	mm	mm	mm	mm	dynamic kN	static C _{0r}	min ⁻¹ Grease lubrication	Oil lubrication
60.000	110.000	22.000	21.996	18.824	99.5	120	3 200	4 300
	130.000	34.100	30.924	22.650	173	186	2 700	3 600
60.325	100.000	25.400	25.400	19.845	100	134	3 500	4 700
	112.712	30.162	30.048	23.812	132	174	3 200	4 300
	122.238	38.100	38.354	29.718	208	244	3 100	4 100
	122.238	43.658	43.764	36.512	215	283	3 100	4 100
	123.825	38.100	36.678	30.162	175	216	3 000	4 100
	127.000	36.512	36.512	26.988	181	228	2 900	3 800
	127.000	44.450	44.450	34.925	226	263	3 100	4 200
	130.175	36.512	33.338	23.812	173	186	2 700	3 600
61.912	110.000	22.000	21.996	18.824	99.5	120	3 200	4 300
	136.525	46.038	46.038	36.512	248	355	2 600	3 500
	146.050	41.275	39.688	25.400	220	234	2 400	3 200
61.976	101.600	24.608	24.608	19.845	100	134	3 500	4 700
62.738	101.600	25.400	25.400	19.845	100	134	3 500	4 700
63.500	94.458	19.050	19.050	15.083	67.0	103	3 600	4 800
	107.950	25.400	25.400	19.050	101	140	3 200	4 300
	107.950	25.400	25.400	19.050	101	140	3 200	4 300
	110.000	22.000	21.996	18.824	99.5	120	3 200	4 300
	110.000	25.400	25.400	19.050	101	140	3 200	4 300
	112.712	30.162	30.048	23.812	132	174	3 200	4 300
	112.712	30.162	30.162	23.812	153	195	3 200	4 200
	120.000	29.794	29.007	24.237	142	177	3 000	4 000
	120.000	29.794	29.007	24.237	142	177	3 000	4 000
	122.238	38.100	38.354	29.718	208	244	3 100	4 100
	122.238	43.658	43.764	36.512	215	283	3 100	4 100
	123.825	38.100	36.678	30.162	175	216	3 000	4 100
	127.000	36.512	36.170	28.575	181	229	2 900	3 800
	127.000	36.512	36.512	26.988	181	228	2 900	3 800
	136.525	41.275	41.275	31.750	215	262	2 800	3 800
	140.030	36.512	33.236	23.520	190	212	2 600	3 400
65.000	105.000	24.000	23.000	18.500	94.5	117	3 300	4 500
	110.000	28.000	28.000	22.500	132	174	3 200	4 300

Note: Chamfer dimensions on the back face of the inner and outer rings of the bearing are larger than the maximum values of installation-related dimensions r_{1as} and r_{1as} .

● Tapered Roller Bearings

NTN



Dynamic equivalent radial load
 $P_r = XF_r + YF_a$

$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
X	Y	X	Y
1	0	0.4	Y_2

Static equivalent radial load

$$P_{0r} = 0.5F_r + Y_0F_a$$

When $P_{0r} < F_r$ use $P_{0r} = F_r$.

For values of e , Y_2

and Y_0 see the table below.

Bearing number ¹⁾	Installation-related dimensions						Load center ²⁾ mm	Constant e	Axial load factors		Mass kg
	mm	mm	mm	mm	r_{as} Max.	r_{1as} Max.			Y_2	Y_0	
4T-397/394A	69	68	101	105	0.8	1.3	0.7	0.40	1.49	0.82	0.918
#4T-JHM911244/JHM911211	84	74	109	123	3.5	3.3	-7.6	0.82	0.73	0.40	2.01
4T-28985/28921	73	67	89	96	3.5	3.3	2.5	0.43	1.41	0.78	0.769
4T-3980/3920	75	68	99	106	3.5	3.3	4.5	0.40	1.49	0.82	1.34
4T-HM212044/HM212011	85	70	108	116	8	3.3	11.1	0.34	1.78	0.98	2.02
4T-5583/5535	78	72	106	116	3.5	3.3	13.3	0.36	1.67	0.92	2.45
4T-558/552A	76	72	109	116	2.3	3.3	9.4	0.35	1.73	0.95	2.09
4T-HM813841/HM813810	83	77	111	121	3.5	3.3	3.7	0.50	1.20	0.66	2.21
4T-65237/65500	87	71	107	119	3.5	3.3	9.3	0.49	1.23	0.68	2.59
4T-HM911245/HM911210	93	74	109	123.6	5	3.3	-5.2	0.82	0.73	0.40	2.12
4T-392/394A	70	69	101	105	0.8	1.3	0.7	0.40	1.49	0.82	0.88
4T-H715334/H715311	87	81	118	132	3.5	3.3	8.7	0.47	1.27	0.70	3.47
4T-H913842/H913810	90	82.4	124	138	3.5	3.3	-4.3	0.78	0.77	0.42	3.17
4T-28990/28920	72	68	90	97	2	3.3	1.7	0.43	1.41	0.78	0.766
4T-28995/28920	75	69	90	97	3.5	3.3	2.5	0.43	1.41	0.78	0.762
4T-L610549/L610510	71	69	86	91	1.5	1.5	-0.6	0.42	1.41	0.78	0.453
4T-29585/29520	77	71	96	103	3.5	3.3	0.6	0.46	1.31	0.72	0.924
4T-29586/29520	73	71	96	103	1.5	3.3	0.6	0.46	1.31	0.72	0.93
4T-390A/394A	73	70	101	105	1.5	1.3	0.7	0.40	1.49	0.82	0.858
4T-29585/29521	77	71	99	104	3.5	1.3	0.6	0.46	1.31	0.72	0.982
4T-3982/3920	77	71	99	106	3.5	3.3	4.5	0.40	1.49	0.82	1.27
4T-39585/39520	77	71	101	107	3.5	3.3	6.6	0.34	1.77	0.97	1.27
4T-477/472	73	72	107	114	0.8	2	3.9	0.38	1.56	0.86	1.6
4T-483/472	78	72	107	114	3.5	2	3.9	0.38	1.56	0.86	1.43
4T-HM212046/HM212011	80	73	108	116	3.5	3.3	11.1	0.34	1.78	0.98	1.95
4T-5584/5535	81	75	106	116	3.5	3.3	13.3	0.36	1.67	0.92	2.34
4T-559/552A	81	75	109	116	3.5	3.3	9.4	0.35	1.73	0.95	2.01
4T-565/563	80	73	112	120	3.5	3.3	8.3	0.36	1.65	0.91	2.11
4T-HM813842/HM813810	84	78	111	121	3.5	3.3	3.7	0.50	1.20	0.66	2.13
4T-639/632	81	74	118	125	3.5	3.3	11.4	0.36	1.66	0.91	2.85
4T-78250/78551	85	79	117	132	2.3	2.3	-8.5	0.87	0.69	0.38	2.54
#4T-JLM710949/JLM710910	77	71	96	100.5	3	1	0.3	0.45	1.32	0.73	0.744
#4T-JM511946/JM511910	78	72	99	105	3	2.5	3.4	0.40	1.49	0.82	1.09

1) Bearing numbers marked "#" designate J-series bearings. The tolerance of these bearings is listed in Table 6.8 on page A-66 to A-67.
2) Dimensions with "-" indicate a load center at the outside on the end of an inner ring.