


NON-INSULATED TWIN CORD END TERMINALS

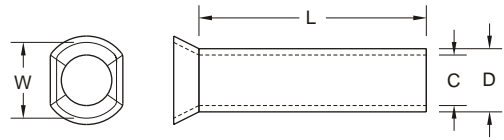

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16	14
AMP.	9	12	17	18	30

TERMINAL MATERIAL: COPPER TUBE. (TIN PLATED)

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION								CRIMPING TOOL
		L		D		C		W		
		inch	mm	inch	mm	inch	mm	inch	mm	
2×22 A.W.G. 2×0.5 mm ²	TEN0508	.315	8.0	.071	1.8	.059	1.5	.067	1.7	K.S. MODEL KST2000L WITH DIE INDEX NO:0.5 OR K.S. MODEL LY8-060 WITH DIE INDEX NO:0.25-0.75 OR WACO MODEL VARIOCRIMP 4
2×20 A.W.G. 2×0.75 mm ²	TEN7508	.315	8.0	.083	2.1	.071	1.8	.075	1.9	K.S. MODEL KST2000L WITH DIE INDEX NO:0.75 OR K.S. MODEL LY8-060 WITH DIE INDEX NO:0.25-0.75 OR WACO MODEL VARIOCRIMP 4
	TEN7510	.394	10.0							
2×18 A.W.G. 2×1.0 mm ²	TEN1006	.236	6.0	.094	2.4	.083	2.1	.098	2.5	K.S. MODEL KST2000L WITH DIE INDEX NO:1 OR K.S. MODEL LY8-060 WITH DIE INDEX NO:1-1.5 OR WACO MODEL VARIOCRIMP 4
	TEN1007	.276	7.0							
	TEN1008	.315	8.0							
	TEN1010	.394	10.0							
2×16 A.W.G. 2×1.5 mm ²	TEN1508	.315	8.0	.102	2.6	.091	2.3	.110	2.8	K.S. MODEL KST2000L WITH DIE INDEX NO:1.5 OR K.S. MODEL LY8-060 WITH DIE INDEX NO:1-1.5 OR WACO MODEL VARIOCRIMP 4
	TEN1512	.472	12.0							
2×14 A.W.G. 2×2.5 mm ²	TEN2510	.394	10.0	.130	3.3	.114	2.9	.134	3.4	K.S. MODEL KST2000L LY8-060 WITH DIE INDEX NO:2.5 OR WACO MODEL VARIOCRIMP 4
	TEN2513	.512	13.0							