


NON-INSULATED RING TERMINALS (RNB-90D SERIES)

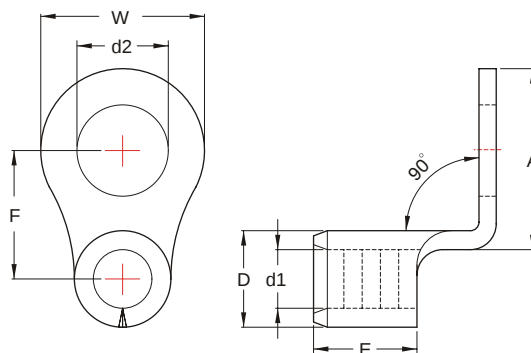

MAXIMUM ELECTRIC CURRENT:

A.W.G.	6	4	2	1/0	2/0	3/0	4/0	250	300	350	400	500	600
AMP.	95	125	170	230	265	310	360	405	445	505	545	620	690

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION inch mm							CRIMPING TOOL	Q'TY BOX
	BRAZED SEAM	BUTTED SEAM	d2		W	F	A	E	D	d1	T		
6 A.W.G. 14 mm ²	RNB14-4-90D		#8	.169 4.3	.472 12.0	.602 15.3	.701 17.8					IZUMI MODEL 9H-60 (EP-38) WITH DIE INDEX NO.:14	500
	RNBS14-5-90D		#10	.209 5.3	.374 9.5	.638 16.2	.697 17.7						500
	RNB14-5-90D		#10	.209 5.3	.472 12.0	.602 15.3	.701 17.8						500
	RNBS14-6-90D		1/4	.252 6.4	.472 12.0		.756 19.2						500
	RNBL14-6-90D*		1/4	.252 6.4		.661 16.8	.862 21.9						500
	RNB14-8-90D		5/16	.331 8.4	.630 16.0								500
	RNB14-10-90D		3/8	.431 10.5		.685 17.4	.874 22.2	.413 10.5	.354 9.0	.228 5.8	.059 1.5		500
	RNB14-11-90D*		7/16	.453 11.5	.866 22.0	.787 20.0	1.091 27.7						250
	RNB14-12-90D*		1/2	.512 13.0		.850 21.6	1.157 29.4						250
	RNB14-14-90D*		9/16	.591 15.0									250
	RNB14-16-90D*		5/8	.669 17.0	1.244 31.6	.831 21.1	1.315 33.4						250
	RNB14-18-90D*		11/16	.748 19.0									250
	RNB14-20-90D*		3/4	.827 21.0									250
4 A.W.G. 22 mm ²	RNBS22-5-90D		#10	.209 5.3	.480 12.2	.669 17.0	.748 19.0					IZUMI MODEL 9H-60 (EP-38) WITH DIE INDEX NO.:22	250
	RNBS22-6-90D		1/4	.252 6.4		.783 19.9	.854 21.7	.472 12.0	.453 11.5	.303 7.7	.067 1.7		250
	RNBL22-6-90D		1/4	.252 6.4	.650 16.5	.661 16.8	.807 20.5						250
	RNB22-8-90D		5/16	.331 8.4		.630 16.0	.795 20.2						250
2 A.W.G. 38 mm ²	RNBS38-6-90D		1/4	.252 6.4	.602 15.3	.776 19.7	.886 22.5	.551 14.0	.524 13.3	.370 9.4	.071 1.8	IZUMI MODEL 9H-60 (EP-38) WITH DIE INDEX NO.:38	200
	RNBS38-8-90D		5/16	.331 8.4									200
1/0 A.W.G. 60 mm ²	RNB60-8-90D	⊙	5/16	.331 8.4	.866 22.0	.941 23.9	1.161 29.5	.709 18.0	.606 15.4	.449 11.4	.071 1.8		100
3/0 A.W.G. 80 mm ²	RNB80-8-90D	⊙	5/16	.331 8.4	1.063 27.0	.996 25.3	1.228 31.2	.787 20.0	.768 19.5	.571 14.5	.091 2.3		50
4/0 A.W.G. 100 mm ²	RNB100-8-90D	⊙	5/16	.331 8.4	1.122 28.5	.890 22.6	1.114 28.3	.827 21.0	.870 22.1	.646 16.4	.106 2.7		50
500/600 A.W.G. 325 mm ²	RNB325-27-90D	⊙	1	1.102 28.0	1.988 50.5	1.969 50.0	2.402 61.0	1.398 35.5	1.480 37.6	1.102 28.0	.169 4.3		5



ALL LISTED

⊙: NOT UL AND C-UL LISTED

*: DEVELOPING ON DEMAND