

PHILIPS**Lighting**

TUV T8

TUV T8 F17 1SL/25

TUV T8 lamps are double-ended UV-C 253.7 nm emitting lamps. TUV T8 lamps offer almost constant UV-C output over their complete lifetime. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.
- Plants and/or materials that are exposed to UV-C and/or ozone for a long time may become damaged and/or discolored.


Product data

General Information		Approval and Application	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Mercury (Hg) Content (Nom)	5.0 mg
Useful Life (Nom)	9,000 hour(s)	CE mark	Yes
Light Technical			UV
Depreciation at Useful Lifetime	15 %	UV-C Radiation at 100 hr	6 W
Operating and Electrical			Product Data
Power Consumption	16.7 W	Order product name	TUV T8 F17 1SL/25
Lamp Current (Nom)	0.236 A	Full product name	TUV T8 F17 1SL/25
Voltage (Nom)	72 V	Full product code	871150026413840
Mechanical and Housing			Order code
Net Weight (Piece)	100.000 g	Material Nr. (12NC)	927941904020
		Numerator - Quantity Per Pack	1
		EAN/UPC - Product/Case	8711500264138


Numerator - Packs per outer box	25
EAN/UPC - Case	8711500264145

Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TUV T8 F17 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604.0 mm



Photometric data

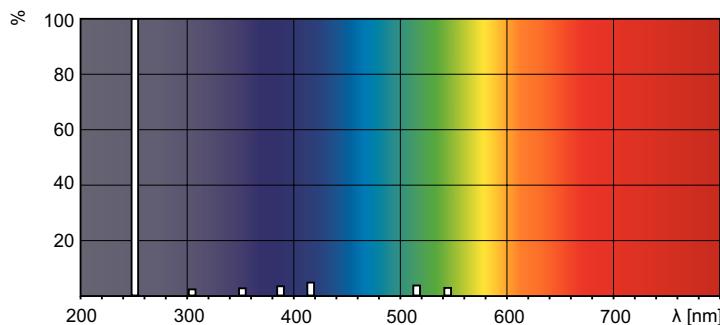

Spectral Power Distribution Colour - TUV T8 F17 1SL/25

