


1/2" Dr. Impact Bit Socket, Hexagon

1/2"

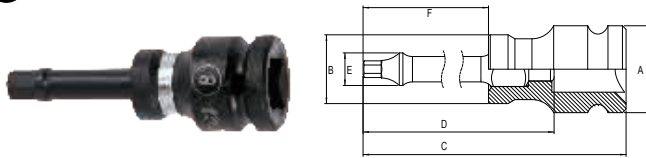


- Bit made of special alloy steel for high hardness and wear resistance Socket made of CR-Mo by cold forging process for impact resistance
- Cylindrical shank for better torsion resistance
- Special construction for tight connection between bit and socket

No.	Spec. (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)			
35404	4	24	19	75	57	8	39	6	60	6.6
35405	5	24	19	75	57	8	39	6	60	6.6
35406	6	24	19	75	57	9	39	6	60	6.7
35407	7	24	19	75	57	9	39	6	60	6.8
35408	8	24	19	75	57	9.5	39	6	60	7
35410	10	25	25	75	57	14	39	6	60	8.2
35412	12	25	25	75	57	15	39	6	60	8.9
35414	14	25	25	75	57	17	39	6	60	9.5

▲ Excluded from lifetime warranty terms.

3/8" Dr. Impact Bit Socket, Torx®

3/8"

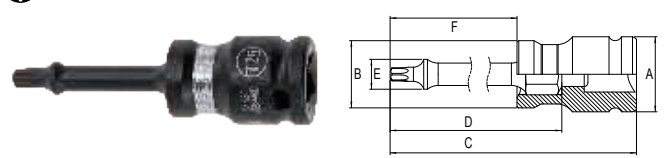


- Bit made of special alloy steel for high hardness and wear resistance Socket made of CR-Mo by cold forging process for impact resistance
- Cylindrical shank for better torsion resistance
- Special construction for tight connection between bit and socket

No.	Spec.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)			
35322	T15	20	18	70	57	5.2	39	6	120	8.9
35323	T20	20	18	70	57	5.2	39	6	120	8.9
35324	T25	20	18	70	57	8	39	6	120	8.9
35325	T27	20	18	70	57	8	39	6	120	9
35326	T30	20	18	70	57	8	39	6	120	9
35327	T40	20	18	70	57	9.5	39	6	120	9.4
35328	T45	20	18	70	57	9.5	39	6	120	10.2
35329	T50	20	18	70	57	11	39	6	120	10.2

▲ Excluded from lifetime warranty terms.

1/4" Dr. Impact Bit Socket, Torx®

1/4"

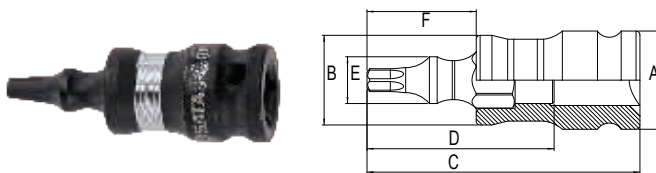


- Bit made of special alloy steel for high hardness and wear resistance Socket made of CR-Mo by cold forging process for impact resistance
- Cylindrical shank for better torsion resistance
- Special construction for tight connection between bit and socket

No.	Spec.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)			
35221	T10	12.6	11.5	35	24	6	14	10	200	4.2
35222	T15	12.6	11.5	35	24	6	14	10	200	4.3
35223	T20	12.6	11.5	35	24	6	14	10	200	4.3
35224	T25	12.6	11.5	35	24	6	14	10	200	4.3
35225	T27	12.6	11.5	35	24	6	14	10	200	4.4
35226	T30	12.6	11.5	35	24	7	14	10	200	4.4

▲ Excluded from lifetime warranty terms.

1/2" Dr. Impact Bit Socket, Torx®

1/2"

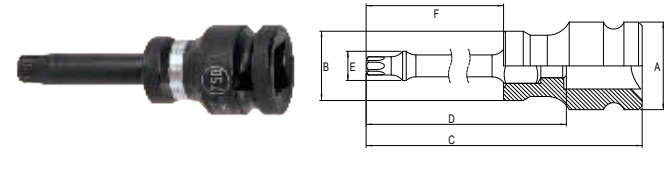

- Bit made of special alloy steel for high hardness and wear resistance Socket made of CR-Mo by cold forging process for impact resistance
- Cylindrical shank for better torsion resistance
- Special construction for tight connection between bit and socket

No.	Spec.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)			
35425	T27	24	19	75	57	8	39	6	60	6.5
35426	T30	24	19	75	57	8	39	6	60	6.5
35427	T40	24	19	75	57	9.5	39	6	60	6.7
35428	T45	24	19	75	57	9.5	39	6	60	6.9
35429	T50	24	19	75	57	11	39	6	60	7.1
35430	T55	25	25	75	57	14	39	6	60	8.9

▲ Excluded from lifetime warranty terms.