

METAL STRIP TYPE NYLON-INSULATED FLAG FEMALE DISCONNECTORS (MS SERIES)

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16	14
AMP.	3	4	7	10	15

MAXIMUM ELECTRICAL RATING: 105°C 300 VOLTS MAX.

INSULATION MATERIAL: NYLON

INSULATION COLOR:

22-18 A.W.G.: RED ■ 16-14 A.W.G.: BLUE ■

TERMINAL MATERIAL: BRASS **PITCH: FIG-1=17.25mm** **FIG-2=18.8mm**

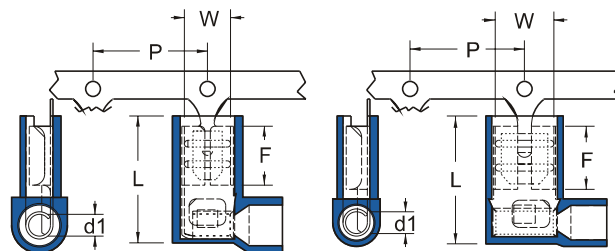


FIG-1

FIG-2

WIRE RANGE A.W.G. mm ²	ITEM NO.	NEMA TAB	DIMENSION ^{inch} / _{mm}					FIG	CRIMPING TOOL	Q'TY BOX
			W	F	L	d1	T			
22-18 A.W.G. 0.5-0.75 mm ²	FLDNY1-187(5)A-MS	.020 × .187 (0.5 × 4.75)	.197 5.0	.276 7.0	.591 15.0	.063 1.6	.016 0.4	1	KM-70MS WITH DIE INDEX NO.:MSM01	1000
	FLDNY1-187(8)A-MS	.032 × .187 (0.8 × 4.75)								1000
	FLDNY1-250A-MS	.032 × .250 (0.8 × 6.35)								.260 6.6
16-14 A.W.G. 1.5-2.5 mm ²	FLDNY2-187(5)A-MS	.020 × .187 (0.5 × 4.75)	.197 5.0	.276 7.0	.598 15.2	.083 2.1	.016 0.4	1	KM-70MS WITH DIE INDEX NO.:MSM01	1000
	FLDNY2-187(8)A-MS	.032 × .187 (0.8 × 4.75)								1000
	FLDNY2-250A-MS	.032 × .250 (0.8 × 6.35)								.260 6.6

NYLON-INSULATED FLAG FEMALE DISCONNECTORS (A TYPE)

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16	14
AMP.	3	4	7	10	15

MAXIMUM ELECTRICAL RATING: 105°C 300 VOLTS MAX.

INSULATION MATERIAL: NYLON

INSULATION COLOR:

22-18 A.W.G.: RED ■ 16-14 A.W.G.: BLUE ■

TERMINAL MATERIAL: BRASS

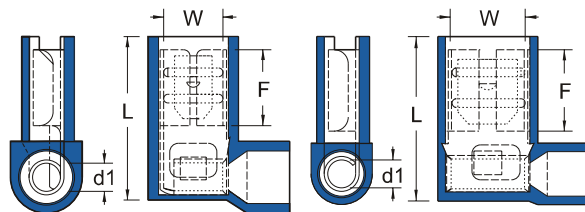


FIG-1

FIG-2

WIRE RANGE A.W.G. mm ²	ITEM NO.	NEMA TAB	DIMENSION ^{inch} / _{mm}					FIG	CRIMPING TOOL	Q'TY BOX
			W	F	L	d1	T			
22-18 A.W.G. 0.5-0.75 mm ²	FLDNY1-187(5)A	.020 × .187 (0.5 × 4.75)	.197 5.0	.276 7.0	.591 15.0	.063 1.6	.016 0.4	1	K.S. MODEL KST2000FA WITH DIE INDEX COLOR:RED	1000
	FLDNY1-187(8)A	.032 × .187 (0.8 × 4.75)								1000
	FLDNY1-250A	.032 × .250 (0.8 × 6.35)								.260 6.6
16-14 A.W.G. 1.5-2.5 mm ²	FLDNY2-187(5)A	.020 × .187 (0.5 × 4.75)	.197 5.0	.276 7.0	.598 15.2	.083 2.1	.016 0.4	1	K.S. MODEL KST2000FA WITH DIE INDEX COLOR:BLUE	1000
	FLDNY2-187(8)A	.032 × .187 (0.8 × 4.75)								1000
	FLDNY2-250A	.032 × .250 (0.8 × 6.35)								.260 6.6