


NON-INSULATED COPPER TUBULAR LUGS (TLKF SERIES)

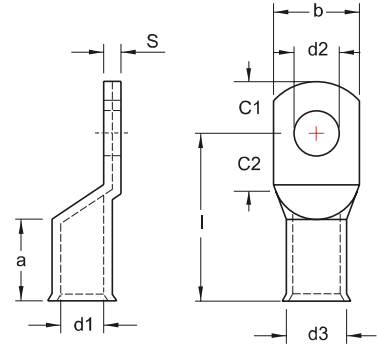

MAXIMUM ELECTRIC CURRENT:

A.W.G.	2	1/0	2/0	3/0
AMP.	170	230	265	310

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION mm									CRIMPING TOOL	Q'TY BOX	
		a	b	C1	C2	d1	d2	d3	I	S			
2 A.W.G. 35 mm ²	TLKF35-10	17	19	12	12	8.5	10.5	12	37	2.9	NOVOPRESS MODEL HPM400	100	
	TLKF35-12		21	13	13		13		38	2.6		100	
	TLKF35-14			14.5	14.5		15		40			100	
	TLKF35-16			26	16		16		17			42	2.2
1/0 A.W.G. 50 mm ²	TLKF50-6	19	20	10	10	10	6.4	14	37	3.7	NOVOPRESS MODEL HPM400	100	
	TLKF50-8			12	12		8.4		39			100	
	TLKF50-10			13	13		10.5		43			3.3	100
	TLKF50-12		23	14.5	14.5		15		45	100			
	TLKF50-14			16	16		17		46	2.7			100
	TLKF50-16			28	19		19		21	48			2.5
	2/0 A.W.G. 70 mm ²		TLKF70-6	21	23		10		10	12		6.5	16.5
TLKF70-8		12	12			8.4	44	50					
TLKF70-10		13	13			10.5	46	50					
TLKF70-12		14.5	14.5			15	48	50					
TLKF70-14		28	16			16	17	50	3.5		50		
TLKF70-16		30	19		19	21	53	3.4	50				
3/0 A.W.G. 95 mm ²		TLKF95-8	21		26	12	12	13.5	8.4		18	48	
	TLKF95-10	13		13		10.5	49		50				
	TLKF95-12	14.5		14.5		15	51		50				
	TLKF95-14	28		16		16	17		54	4.0		50	
	TLKF95-16	25		36	22	22	21		60	3.0		50	
	TLKF95-20												