


NON-INSULATED PARALLEL & BUTT CONNECTORS

MAXIMUM ELECTRIC CURRENT:

A.W.G.	300	350	400	500	600
AMP.	445	505	545	620	690

TERMINAL MATERIAL: COPPER TUBULAR

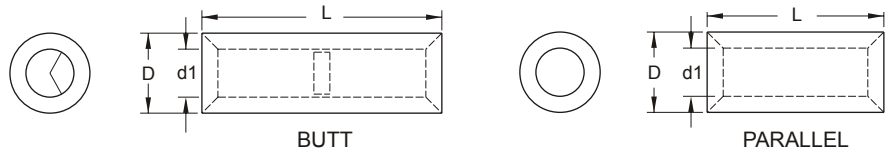

WIRE RANGE A.W.G. mm ²	ITEM NO.				DIMENSION inch mm			CRIMPING TOOL	Q'TY BOX
	PARALLEL	L	BUTT	L	D	d1	T		
300/350 MCM 180 mm ²	PNT180	1.122 28.5	BNT180	2.244 57.0	1.122 28.5	.827 21.0	.148 3.75	IZUMI MODEL 12#A WITH DIE INDEX NO:180	10
			BNT180-114	4.488 114.0					10
400/500 MCM 200 mm ²	PNT200	1.260 32.0	BNT200	2.480 63.0	1.276 32.4	.945 24.0	.165 4.2	IZUMI MODEL 12#A WITH DIE INDEX NO:200	10
			BNT200-126	4.961 126.0					10
500/600 MCM 325 mm ²	PNT325	1.457 37.0	BNT325	2.835 72.0	1.457 37.0	1.102 28.0	.177 4.5	IZUMI MODEL 12#A WITH DIE INDEX NO:325	5
			BNT325-144	5.670 144.0					


UL cUL ALL LISTED

NON-INSULATED BUTT CONNECTORS

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16	14	12	10
AMP.	9	12	17	18	30	35	50

TERMINAL MATERIAL: COPPER PLATE

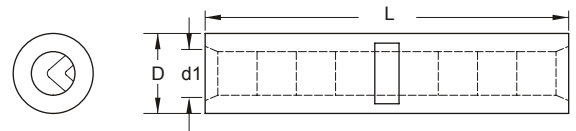

WIRE RANGE A.W.G. mm ²	ITEM NO.		DIMENSION inch mm				CRIMPING TOOL	Q'TY BOX
	PARALLEL		L	D	d1	T		
22-16 A.W.G. 0.5-1.5 mm ²	BN1		.591 15.0	.130 3.3	.071 1.8	.028 0.7	IZUMI MODEL 5N18 WITH DIE INDEX NO:1.25 OR K.S. MODEL KST2000D-1322 LY-2045A WITH DIE INDEX NO:1.25	1000
16-14 A.W.G. 1.5-2.5 mm ²	BN2		.591 15.0	.154 3.9	.094 2.4	.028 0.7	IZUMI MODEL 5N18 WITH DIE INDEX NO:2 OR K.S. MODEL KST2000D-1322 LY-2045A WITH DIE INDEX NO:2	1000
12-10 A.W.G. 4-6 mm ²	BN5		.591 15.0	.213 5.4	.138 3.5	.035 0.9	IZUMI MODEL 5N18 WITH DIE INDEX NO:5.5 OR K.S. MODEL KST2000D-1322 LY-2045A WITH DIE INDEX NO:5.5	1000