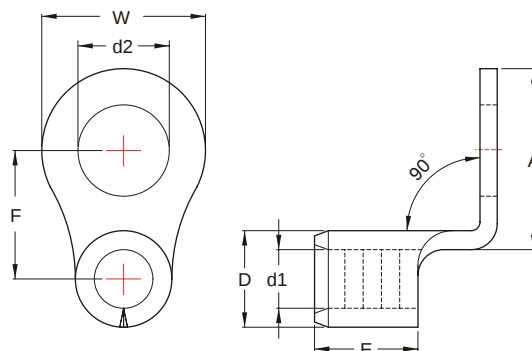


NON-INSULATED RING TERMINALS (RNB-90D SERIES)


MAXIMUM ELECTRIC CURRENT:

A.W.G.	12	10
AMP.	35	50

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION inch mm							CRIMPING TOOL	Q'TY BOX
	BRAZED SEAM	BUTTED SEAM		d2	W	F	A	E	D	d1	T		
12-10 A.W.G.	RNB5-3.2-90D	RN5-3.2-90D [⊙]	#4	.126 3.2	.283 7.2	.252 6.4	.327 8.3					IZUMI MODEL 5N18 WITH DIE INDEX NO.:5.5 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO.:12-10	1000
	RNB5-3.7-90D	RN5-3.7-90D [⊙]	#6	.146 3.7									1000
	RNBL5-3.7-90D [※]	RNL5-3.7-90D ^{※⊙}	#6	.146 3.7	.374 9.5	.303 7.7	.421 10.7						1000
	RNBS5-4-90D	RNS5-4-90D [⊙]	#8	.169 4.3	.283 7.2	.291 7.4	.366 9.3						1000
	RNBL5-4-90D	RNL5-4-90D [⊙]	#8	.169 4.3	.374 9.5	.331 8.4	.453 11.5						1000
	RNB5-5-90D	RN5-5-90D [⊙]	#10	.209 5.3		.295 7.5	.413 10.5						1000
	RNBL5-5-90D [※]	RNL5-5-90D ^{※⊙}	#10	.209 5.3	.488 12.4	.496 12.6	.669 17.0						1000
	RNB5-6-90D	RN5-6-90D [⊙]	1/4	.252 6.4		.413 10.5	.583 14.8						1000
	RNBM5-6-90D [※]	RNM5-6-90D ^{※⊙}	1/4	.252 6.4	.472 12.0	.504 12.8	.673 17.1						1000
	RNB5-7-90D [※]	RN5-7-90D ^{※⊙}	1/4	.291 7.4		.366 9.3	.535 13.6	.236 6.0	.220 5.6	.134 3.4	.039 1.0		1000
4-6 mm ²	RNB5-8-90D	RN5-8-90D [⊙]	5/16	.331 8.4	.591 15.0	.512 13.0	.756 19.2						1000
	RNB5-10-90D [※]	RN5-10-90D ^{※⊙}	3/8	.413 10.5		.484 12.3	.713 18.1						1000
	RNB5-11-90D [※]	RN5-11-90D ^{※⊙}	7/16	.453 11.5	.756 19.2	.618 15.7	.929 23.6						1000
	RNB5-12-90D [※]	RN5-12-90D ^{※⊙}	1/2	.512 13.0									1000
	RNB5-14-90D [※]	RN5-14-90D ^{※⊙}	9/16	.591 15.0	1.260 32.0								1000
	RNB5-16-90D [※]	RN5-16-90D ^{※⊙}	5/8	.669 17.0		.937 23.8	1.500 38.1						1000
	RNB5-18-90D ^{※⊙}	RN5-18-90D ^{※⊙}	11/16	.748 19.0	1.260 32.0								1000
	RNB5-20-90D ^{※⊙}	RN5-20-90D ^{※⊙}	3/4	.827 21.0									1000



ALL LISTED

⊙: NOT UL AND C-UL LISTED

※: DEVELOPING ON DEMAND