


NON-INSULATED COPPER TUBULAR LUGS (TCLH-2A SERIES)

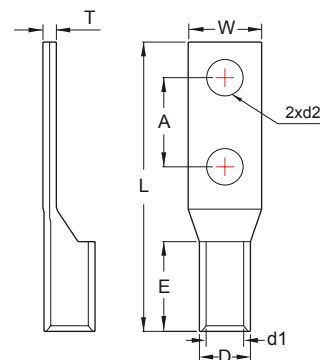

MAXIMUM ELECTRIC CURRENT:

A.W.G.	8	6	4	2	1/0
AMP.	70	95	125	170	230

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	STUD SIZE	DIMENSION ^{inch} mm							CRIMPING TOOL	Q'TY BOX
		2*d2	W	A	L	E	D	d1	T		
8 A.W.G. 10 mm ²	TCLH10-5-2A	5.3	10.4	16.0	47.5	14.25	6.9	4.5	2.0	K.S. MODEL LY-2045D	500
6 A.W.G. 16 mm ²	TCLH16-2B6	6.5	12.2	25.4	66.3	20.5	7.9	5.5	2.0	NOVOPRESS MODEL HPM400	100
	TCLH16-4-2A	4.3	12.2	19.0	56.0	20.5	7.9	5.5	2.0		
	TCLH16-5-2A	5.3	12.2	16.0	56.0	20.5	7.9	5.5	2.0		
	TCLH16-6-2A	6.4	12.2	16.0	56.0	20.5	7.9	5.5	2.0		
	TCLH16-6-2AS	6.4	12.2	16.0	52.0	16.5	7.9	5.5	2.0		250
4 A.W.G. 25 mm ²	TCLH25-2A6	6.5	13.1	15.9	51.6	16.0	9.1	6.7	2.4	NOVOPRESS MODEL HPM400	100
	TCLH25-2A6.5	6.9								NOVOPRESS MODEL HPM400	
	TCLH25-2B6	6.5	14.0	25.4	66.8	20.6	9.7	7.1	2.3	NOVOPRESS MODEL HPM400	
2 A.W.G. 35 mm ²	TCLH35-2A6.5	6.9	17.0	15.9	65.4	23.0	11.9	9.1	2.8	NOVOPRESS MODEL HPM400	100
	TCLH35-2B6.5			25.4	74.9					NOVOPRESS MODEL HPM400	
1/0 A.W.G. 50 mm ²	TCLH50-6-2A	6.4	19.0	19.0	68.6	24.5	13.2	10.0	3.2	NOVOPRESS MODEL HPM400	100