


## T-Handle 6Pt. Socket Wrench

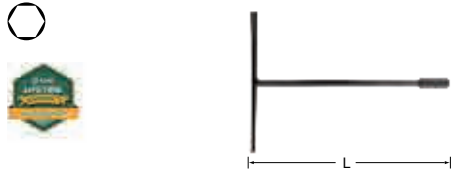

- Socket made of quality Cr-V
- 30cm-long extension bar for use in narrow space
- 20cm-long handle for higher torque

No.	Spec. (mm)	L(mm)			
47701	8	310	-	50	16.2
47702	9	310	-	50	16.4
47703	10	308	-	50	16.8
47704	11	308	-	50	20
47705	12	308	-	50	17.4
47706	13	310	-	35	16.3
47707	14	310	-	35	16.4
47710	17	313	-	25	15.9
47712	19	313	-	25	16.2

## Metric Box End Slugging Wrenches



- Forged from alloy steel
- Subjected to heat treatment for uniform hardness
- Surface with hard film and subject to anti-rust treatment for elegance, durability and rust prevention
- Tapping end with a safety hole to be hung with wire and string and connected to device during tapping to avoid wounding due to excessive force, and facilitate hanging and storage when not in use

No.	Spec. (mm)	S(mm)	L(mm)	D(mm)	H(mm)			
48505	27	27	175	45	15	6	24	7.9
48506	30	30	185	55	15	6	24	10.1
48507	32	32	185	50	15	6	24	10.8
48509	36	36	205	55	15	6	24	13.8
48512	41	41	225	62	19	6	24	17.7
48515	46	46	235	75	20	6	24	22.3
48516	50	50	250	75	20	6	18	19.6
48517	55	55	265	85	25	6	12	16
48519	60	60	274	90	25	6	12	18.9
48520	65	65	298	90	25	6	12	24.5
48521	70	70	320	105	30	3	6	14.6
48522	75	75	330	110	33.3	1	6	17
48523	80	80	359	131	36	1	6	23
48524	85	85	359	131	36	1	6	23
48525	90	90	391	145	39.8	1	4	24
48526	95	95	391	145	39.8	1	4	22
48527	100	100	421	158	43.5	1	2	14
48528	105	105	421	158	45.5	1	2	14
48529	110	110	450	172	47.5	1	2	17
48530	115	115	450	172	47.5	1	2	16
48531	120	120	480	185	53	1	2	19

## Metric Open End Slugging Wrenches



- Forged from alloy steel
- Subjected to heat treatment for uniform hardness
- Surface with hard film and subject to anti-rust treatment for elegance, durability and rust prevention
- Tapping end with a safety hole to be hung with wire and string and connected to device during tapping to avoid wounding due to excessive force, and facilitate hanging and storage when not in use

No.	Spec. (mm)	S(mm)	L(mm)	D(mm)	H(mm)			
48603	27	27	175	45	15	6	24	9.3
48604	30	30	190	65	15	6	24	13.6
48605	32	32	185	60	18	6	24	12.4
48607	36	36	210	70	16	6	24	17.4
48609	41	41	230	85	16	6	24	23.5
48610	46	46	240	95	20	6	18	23.5
48611	50	50	270	100	18	6	12	18.8
48612	55	55	295	115	25	6	12	24.1
48613	60	60	310	120	25	6	6	14.2
48614	65	65	330	195	30	3	6	19.3
48615	70	70	360	150	30	3	6	24
48616	75	75	390	156	30.3	6	6	29
48617	80	80	408	173	33.3	4	4	28
48618	85	85	408	173	33.3	4	4	26
48619	90	90	445	193	38	2	2	19
48620	95	95	445	193	38	2	2	19
48621	100	100	485	214	45.5	2	2	22
48622	105	105	485	214	45.5	2	2	22