


NON-INSULATED COPPER TUBULAR LUGS (TLK SERIES)

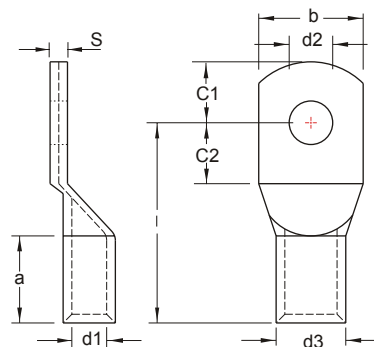

MAXIMUM ELECTRIC CURRENT:


A.W.G.	500	600	700	750
AMP.	620	690	755	785

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION mm									CRIMPING TOOL	Q'TY BOX
		a	b	C1	C2	d1	d2	d3	I	S		
500 MCM 300 mm ²	TLK300-12	44.0	43.0	24.0	24.0	23.5	13.0	29.5	87.0	5.9	NOVOPRESS MODEL HPM400	5
	TLK300-14						15.0					5
	TLK300-16						17.0					5
	TLK300-20						21.0					5
600/750 MCM 400 mm ²	TLK400-12	44.0	49.0	24.0	24.0	27.0	13.0	34.0	90.0	6.8	NOVOPRESS MODEL HPM400	5
	TLK400-14						15.0					5
	TLK400-16						17.0					5
	TLK400-20						21.0					5

UL cUL ALL LISTED

NON-INSULATED COPPER TUBULAR LUGS (TLKSG SERIES)

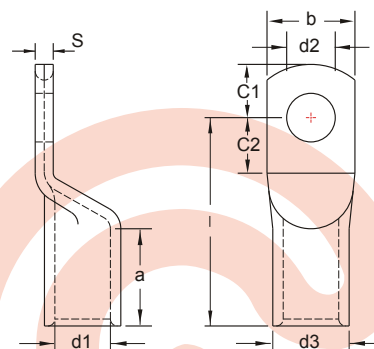

MAXIMUM ELECTRIC CURRENT:

A.W.G.	2/0
AMP.	265

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION mm									CRIMPING TOOL	Q'TY BOX		
		a	b	C1	C2	d1	d2	d3	I	S				
2/0 MCM 70 mm ²	TLKSG70-6	21.0	17.0	10.0	10.0	12.0	6.5	16.5	43.0	4.3	NOVOPRESS MODEL HPM400	50		
	TLKSG70-8						8.5					50		
	TLKSG70-10		19.0	11.5	12.0		10.5		45.0	3.9		50		
	TLKSG70-12						13.0					50		