


NON-INSULATED SQUARE TONGUE TERMINALS

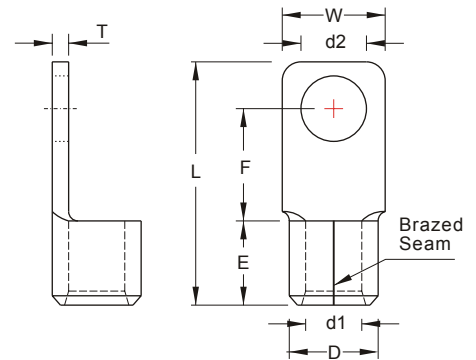

MAXIMUM ELECTRIC CURRENT:

A.W.G.	4	2	1/0	3/0	4/0	250	300
AMP.	125	170	230	310	360	405	445

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.	STUD SIZE		DIMENSION inch mm							CRIMPING TOOL	Q'TY BOX
	BRAZED SEAM	d2		W	F	L	E	D	d1	T		
4 A.W.G. 22 mm ²	SQNBS22-5	#10	.209 5.3	.492 12.5	.531 13.5	1.260 32.0	.472 12.0	.453 11.5	.303 7.7	.067 1.7	IZUMI MODEL 9H-60, 12#A WITH DIE INDEX NO:22 OR K.S. MODEL KH-120 LY-2045E WITH DIE INDEX NO:22 OR 25	250
	SQNBS22-6	1/4	.252 6.4									
	SQNBS22-8	5/16	.331 8.4									
2 A.W.G. 38 mm ²	SQNBSS38-5	#10	.209 5.3	.520 13.2	.642 16.3	1.496 38.0	.543 13.8	.524 13.3	.366 9.3	.071 1.8	IZUMI MODEL 9H-60, 12#A WITH DIE INDEX NO:38 OR K.S. MODEL KH-120 KH-150 WITH DIE INDEX NO:35 OR 38	200
	SQNBS38-5	#10	.209 5.3									
	SQNBS38-6	1/4	.252 6.4									
	SQNBS38-8	5/16	.331 8.4									
1/0 A.W.G. 60 mm ²	SQNBS60-6	1/4	.252 6.4	.630 16.0	.787 20.0	1.929 49.0	.728 18.5	.610 15.5	.433 11.0	.079 2.0	IZUMI MODEL 9H-60, 9H-150, 12#A WITH DIE INDEX NO:60 OR K.S. MODEL KH-120 KH-150 WITH DIE INDEX NO:50	100
	SQNBSS60-8	5/16	.331 8.4	.630 16.0	.787 20.0	1.831 46.5						
	SQNBS60-8	5/16	.331 8.4	.630 16.0	.787 20.0	1.929 49.0						
	SQNBSS60-10	3/8	.413 10.5	.630 16.0	.787 20.0	1.878 47.7						
	SQNBS60-10	3/8	.413 10.5	.630 16.0	.787 20.0	1.929 49.0						
3/0 A.W.G. 80 mm ²	SQNBS80-6	1/4	.252 6.4	.858 21.8	.787 20.0	1.929 49.0	.748 19.0	.768 19.5	.571 14.5	.091 2.3	IZUMI MODEL 9H-150, 12#A WITH DIE INDEX NO:80 OR K.S. MODEL KH-120 KH-150 WITH DIE INDEX NO:70	50
	SQNBS80-8	5/16	.331 8.4									
	SQNBS80-10	3/8	.413 10.5									
	SQNBS80-12	1/2	.512 13.0									
4/0 A.W.G. 100 mm ²	SQNBS100-8	5/16	.331 8.4	.858 21.8	.827 21.0	2.087 53.0	.787 20.0	.878 22.3	.646 16.4	.106 2.7	IZUMI MODEL 9H-150, 12#A WITH DIE INDEX NO:100 OR K.S. MODEL KH-120 KH-150 WITH DIE INDEX NO:95	50
	SQNBS100-10	3/8	.413 10.5									
	SQNBS100-12	1/2	.512 13.0									
250/300 MCM 125 mm ²	SQNBS125-8	⊙ 5/16	.331 8.4	.858 21.8	.787 20.0	2.126 54.0	.866 22.0	.902 22.9	.689 17.5	.106 2.7		25
	SQNBS125-10	⊙ 3/8	.413 10.5									
	SQNBS125-12	⊙ 1/2	.512 13.0									



ALL LISTED

⊙ NOT UL AND C-UL LISTED