

(E SERIES)


MAXIMUM ELECTRIC CURRENT:

A.W.G.	26	24	22	20	18
AMP.	5.5	7	9	12	17

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

CONNECTOR MATERIAL: COPPER TUBE.

INSULATION MATERIAL: NYLON



WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION inch mm						FRENCH COLOR	GERMAN COLOR	DIN COLOR	CRIMPING TOOL
		F	L	W	B	D	C				
24 A.W.G. 0.25 mm ²	E0205 ©	.197 5.0	.370 9.4	.075 1.9	.173 4.4	.043 1.1	.031 0.8	VIOLET 	LIGHT BLUE 		K.S. MODEL LY8-060 WITH DIE INDEX NO:0.25-0.75
	E0206	.236 6.0	.409 10.4								
	E0208	.315 8.0	.488 12.4								
22 A.W.G. 0.34 mm ²	E0305 ©	.197 5.0	.370 9.4	.075 1.9	.173 4.4	.043 1.1	.031 0.8	PINK 	TURQUOISE 		K.S. MODEL LY8-060 WITH DIE INDEX NO:0.25-0.75
	E0306	.236 6.0	.409 10.4								
	E0308	.315 8.0	.488 12.4								
	E0309	.354 9.0	.528 13.4								
20 A.W.G. 0.5 mm ²	E0505 ©	.197 5.0	.433 11.0	.102 2.6	.236 6.0	.051 1.3	.039 1.0	WHITE 	ORANGE 	WHITE 	K.S. MODEL KST2000L WITH DIE INDEX NO:0.5 OR K.S. MODEL LY8-060 WITH DIE INDEX NO:0.25-0.75
	E0506	.236 6.0	.472 12.0								
	E0508	.315 8.0	.551 14.0								
	E0509	.354 9.0	.591 15.0								
	E0510	.394 10.0	.630 16.0								
	E0512	.472 12.0	.709 18.0								
18 A.W.G. 0.75 mm ²	E7505 ©	.197 5.0	.445 11.3	.110 2.8	.248 6.3	.059 1.5	.047 1.2	BLUE 	WHITE 	GREY 	K.S. MODEL KST2000L WITH DIE INDEX NO:0.75 OR K.S. MODEL LY8-060 WITH DIE INDEX NO:0.25-0.75
	E7506	.236 6.0	.484 12.3								
	E7508	.315 8.0	.563 14.3								
	E7508-L	.315 8.0	.571 14.5	.118 3.0	.256 6.5						
	E7510	.394 10.0	.642 16.3	.110 2.8	.248 6.3						
	E7510-L	.394 10.0	.650 16.5	.118 3.0	.256 6.5						
	E7512	.472 12.0	.720 18.3	.110 2.8	.248 6.3						
	E7512-L	.472 12.0	.728 18.5	.118 3.0	.256 6.5						
	E7518	.709 18.0	.957 24.3	.110 2.8	.248 6.3						
	E7518-L	.709 18.0	.965 24.5	.118 3.0	.256 6.5						
18 A.W.G. 1.0 mm ²	E1006	.236 6.0	.472 12.0	.118 3.0	.248 6.3	.067 1.7	.055 1.4	RED 	YELLOW 	RED 	K.S. MODEL KST2000L WITH DIE INDEX NO:1 OR K.S. MODEL LY8-060 WITH DIE INDEX NO:1-1.5
	E1006-L	.236 6.0	.492 12.5	.650 3.3							
	E1008	.315 8.0	.551 14.0	.118 3.0	.248 6.3						
	E1008-L	.315 8.0	.571 14.5	.130 3.3	.256 6.5						
	E1010	.394 10.0	.630 16.0	.118 3.0	.248 6.3						
	E1010-L	.394 10.0	.650 16.5	.650 3.3	.256 6.5						
	E1012	.472 12.0	.709 18.0	.118 3.0	.248 6.3						

(E SERIES)


MAXIMUM ELECTRIC CURRENT:

A.W.G.	18	16	14	12	10	8	6
AMP.	17	18	30	35	50	70	95

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

CONNECTOR MATERIAL: COPPER TUBE.

INSULATION MATERIAL: NYLON



WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION inch mm						FRENCH COLOR	GERMAN COLOR	DIN COLOR	CRIMPING TOOL
		F	L	W	B	D	C				
18 A.W.G. 1.0 mm ²	E1012-L	.472 12.0	.728 18.5	.130 3.3	.256 6.5	.067 1.7	.055 1.4	RED 	YELLOW 	RED 	K.S. MODEL KST2000L WITH DIE INDEX NO:1 OR K.S. MODEL LY8-060 WITH DIE INDEX NO:1-1.5 OR WACO MODEL VARIOCRIMP 4
	E1018	.709 18.0	.957 24.3	.118 3.0	.248 6.3						
16 A.W.G. 1.5 mm ²	E1506	.236 6.0	.484 12.3	.138 3.5	.248 6.3	.079 2.0	.067 1.7	BLACK 	RED 	BLACK 	K.S. MODEL KST2000L WITH DIE INDEX NO:1.5 OR K.S. MODEL LY8-060 WITH DIE INDEX NO:1-1.5
	E1508	.315 8.0	.551 14.0								
	E1508-L	.315 8.0	.571 14.5								
	E1510	.394 10.0	.630 16.0								
	E1512	.472 12.0	.709 18.0								
	E1512-L	.472 12.0	.728 18.5								
	E1515	.591 15.0	.839 21.3								
	E1518	.709 18.0	.945 24.0								
	E1518-L	.709 18.0	.965 24.5	.150 3.8	.256 6.5						
14 A.W.G. 2.5 mm ²	E2508	.315 8.0	.606 15.4	.165 4.2	.291 7.4	.098 2.5	.087 2.2	GREY 	BLUE 	BLUE 	K.S. MODEL KST2000L WITH DIE INDEX NO:2.5 OR K.S. MODEL LY8-060 WITH DIE INDEX NO:2.5
	E2509	.354 9.0	.646 16.4								
	E2510	.394 10.0	.685 17.4								
	E2512	.472 12.0	.764 19.4								
	E2518	.709 18.0	1.00 25.4								
	E2525	.984 25.0	1.276 32.4								
12 A.W.G. 4.0 mm ²	E4009	.354 8.0	.646 16.4	.189 4.8	.291 7.4	.126 3.2	.110 2.8	ORANGE 	GREY 	GREY 	K.S. MODEL KST2000L LY8-060 WITH DIE INDEX NO:4 OR WACO MODEL VARIOCRIMP 4
	E4010	.394 10.0	.669 17.0								
	E4012	.472 12.0	.787 20.0								
	E4018	.709 18.0	1.024 26.0								
10 A.W.G. 6.0 mm ²	E6010	.394 10.0	.728 18.5	.248 6.3	.338 8.5	.154 3.9	.138 3.5	GREEN 	BLACK 	YELLOW 	K.S. MODEL KST2000M(6) LY8-060(6)
	E6012	.472 12.0	.787 20.0								
	E6018	.709 18.0	1.024 26.0								



ALL LISTED

⊙: NOT RU AND C-RU LISTED

(E SERIES)


MAXIMUM ELECTRIC CURRENT:

A.W.G.	8	6	4	2	1/0	2/0
AMP.	70	95	125	170	230	265

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

CONNECTOR MATERIAL: COPPER TUBE.

INSULATION MATERIAL: NYLON



WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION inch mm						FRENCH COLOR	GERMAN COLOR	DIN COLOR	CRIMPING TOOL
		F	L	W	B	D	C				
8 A.W.G. 10 mm ²	E10-12	.472 12.0	.886 22.0	.299 7.6	.346 8.8	.193 4.9	.177 4.5	BROWN 	IVORY 	RED 	K.S. MODEL KST2000M
	E10-15	.591 15.0	.929 23.6								
	E10-18	.709 18.0	1.102 28.0								
6 A.W.G. 16 mm ²	E16-12	.472 12.0	.945 24.0	.346 8.8	.394 10.0	.244 6.2	.228 5.8	IVORY 	GREEN 	BLUE 	K.S. MODEL KST2000M(16)
	E16-18	.709 18.0	1.102 28.0								
4 A.W.G. 25 mm ²	E25-12 [Ⓢ]	.472 12.0	.945 24.0	.441 11.2	.472 12.0	.311 7.9	.295 7.5	BLACK 	BROWN 	YELLOW 	K.S. MODEL KSTP-325-B WITH DIE INDEX NO:E-25
	E25-15 [Ⓢ]	.591 15.0	1.063 27.0								
	E25-16	.630 16.0	1.102 28.0								
	E25-18	.709 18.0	1.181 30.0								
	E25-22	.886 22.0	1.417 36.0								
	E25-25	.984 25.0	1.457 37.0								
2 A.W.G. 35 mm ²	E35-16	.630 16.0	1.181 30.0	.500 12.7	.551 14.0	.343 8.7	.327 8.3	RED 	BEIGE 	RED 	K.S. MODEL KSTP-325-B WITH DIE INDEX NO:E-35
	E35-18	.709 18.0	1.181 30.0								
	E35-22	.866 22.0	1.147 36.0								
	E35-25	.984 25.0	1.535 39.0								
1/0 A.W.G. 50 mm ²	E50-12 [Ⓢ]	.472 12.0	1.102 28.0	.591 15.0	.630 16.0	.429 10.9	.406 10.3	BLUE 	OLIVE 	BLUE 	K.S. MODEL KSTP-325-B WITH DIE INDEX NO:E-50
	E50-16 [Ⓢ]	.630 16.0	1.260 32.0								
	E50-20	.787 20.0	1.417 36.0								
	E50-22	.866 22.0	1.496 38.0								
	E50-25	.984 25.0	1.575 40.0								
	E50-30	1.181 30.0	1.811 46.0								
2/0 A.W.G. 70 mm ²	E70-20	.787 20.0	1.457 37.0	.630 16.0	.669 17.0	.563 14.3	.531 13.5	YELLOW 	YELLOW 	YELLOW 	K.S. MODEL KSTP-325-B WITH DIE INDEX NO:KC-70
	E70-25	.984 25.0	1.654 42.0								
	E70-27	1.063 27.0	1.732 44.0								



(E SERIES)


MAXIMUM ELECTRIC CURRENT:

A.W.G.	3/0	4/0	250	300
AMP.	310	360	405	445

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

CONNECTOR MATERIAL: COPPER TUBE.

INSULATION MATERIAL: NYLON





WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION inch mm						FRENCH COLOR	GERMAN COLOR	DIN COLOR	CRIMPING TOOL
		F	L	W	B	D	C				
3/0 A.W.G.	E95-25	.984 25.0	1.732 44.0	.728 18.5	.748 19.0	.602 15.3	.571 14.5	RED 	RED 	RED 	K.S. MODEL KSTP-325-B WITH DIE INDEX NO:KC-95
95 mm ²	E95-30 ©	1.181 30.0	1.953 49.6								
4/0 A.W.G. 120 mm ²	E120-27	1.063 27.0	1.874 47.6	.799 20.3	.811 20.6	.697 17.7	.657 16.7	BLUE 	BLUE 	BLUE 	K.S. MODEL KSTP-325-B WITH DIE INDEX NO:KC-120
	E120-30 ©	1.181 30.0	2.008 51.0								
	E120-32	1.260 32.0	2.071 52.6								
	E120-34 ©	1.339 34.0	2.150 54.6								
	E120-48	1.890 48.0	2.228 56.6								
250/300 MCM 150 mm ²	E150-25	.984 25.0	1.992 50.6	.921 23.4	1.008 25.6	.811 20.6	.772 19.6	YELLOW 	YELLOW 	YELLOW 	K.S. MODEL KSTP-325-B WITH DIE INDEX NO:KC-150
	E150-27	1.063 27.0	2.071 52.6								
	E150-32	1.260 32.0	2.268 57.6								
	E150-38 ©	1.496 38.0	2.504 63.6								
	E150-58	2.283 58.0	3.291 83.6								



ALL LISTED

©: NOT RU AND C-RU LISTED

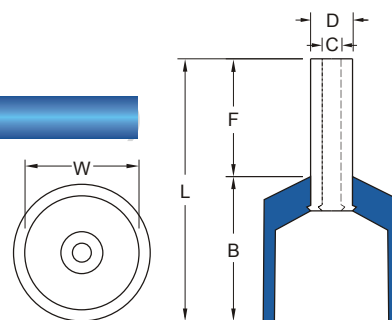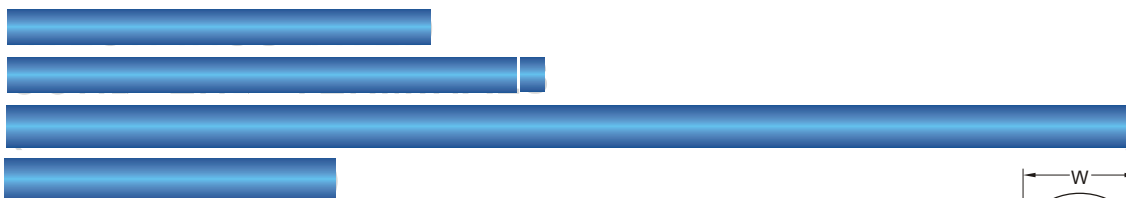

MAXIMUM ELECTRIC CURRENT:

A.W.G.	16	14	12	10	8	6
AMP.	18	30	35	50	70	95



MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

CONNECTOR MATERIAL: COPPER TUBE.

INSULATION MATERIAL: NYLON

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION inch mm						FRENCH COLOR	GERMAN COLOR	DIN COLOR	CRIMPING TOOL
		F	L	W	B	D	C				
16 A.W.G. 1.5 mm ²	E1508-XL	.315 8.0	.685 17.4	.268 6.8	.370 9.4	.083 2.1	.071 1.8	BLACK 	RED 	BLACK 	K.S. MODEL KST2000L WITH DIE INDEX NO:1.5 K.S. MODEL LY8-060 WITH DIE INDEX NO:1-1.5
	E1510-XL	.394 10.0	.764 19.4								
	E1512-XL	.472 12.0	.843 21.4								
14 A.W.G. 2.5 mm ²	E2508-XL	.315 8.0	.693 17.6	.307 7.8	.378 9.6	.102 2.6	.091 2.3	GREY 	BLUE 	BLUE 	K.S. MODEL KST2000L LY8-060 WITH DIE INDEX NO:2.5
	E2512-XL	.472 12.0	.850 21.6								
12 A.W.G. 4 mm ²	E4010-XL	.394 10.0	.768 19.5	.307 7.8	.374 9.5	.130 3.3	.114 2.9	ORANGE 	GREY 	GREY 	K.S. MODEL KST2000L LY8-060 WITH DIE INDEX NO:4
	E4012-XL	.472 12.0	.846 21.5								
10 A.W.G. 6 mm ²	E6012-XL	.472 12.0	.909 23.1	.327 8.3	.437 11.1	.165 4.2	.150 3.8	GREEN 	BLACK 	YELLOW 	K.S. MODEL KST2000M(4) LY8-060(4)
8 A.W.G. 10 mm ²	E10-12-XL	.472 12.0	.933 23.7	.386 9.8	.461 11.7	.193 4.9	.177 4.5	BROWN 	IVORY 	RED 	K.S. MODEL KST2000M(10)
	E10-18-XL	.709 18.0	1.169 29.7								
6 A.W.G. 16 mm ²	E16-12-XL	.472 12.0	1.016 25.8	.480 12.2	.543 13.8	.252 6.4	.236 6.0	IVORY 	GREEN 	BLUE 	K.S. MODEL KST2000M(16)
	E16-18-XL	.709 18.0	1.252 31.8								

 ALL LISTED

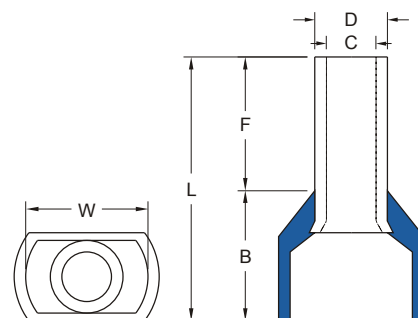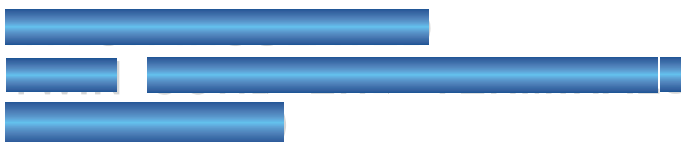

MAXIMUM ELECTRIC CURRENT:



A.W.G.	22	20	18	16	14	12	10	8
AMP.	9	12	17	18	30	35	50	70

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

CONNECTOR MATERIAL: COPPER TUBE.

INSULATION MATERIAL: NYLON

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION inch mm						FRENCH COLOR	GERMAN COLOR	DIN COLOR	CRIMPING TOOL
		F	L	W	B	D	C				
2X20 A.W.G. 2X0.5 mm ²	TE0508	.315 8.0	.517 14.5	.197 5.0	.256 6.5	.071 1.8	.055 1.4	WHITE 	ORANGE 	WHITE 	K.S. MODEL LY8-060 WITH DIE INDEX NO.:1-1.5 K.S. MODEL KST2000L WITH DIE INDEX NO.:1
	TE0509	.354 9.0	.610 15.5								
	TE0510	.394 10.0	.650 16.5								
	TE0512	.472 12.0	.728 18.5								
2X18 A.W.G. 2X0.75 mm ²	TE7508	.315 8.0	.579 14.7	.217 5.5	.264 6.7	.083 2.1	.071 1.8	BLUE 	WHITE 	GREY 	K.S. MODEL LY8-060 WITH DIE INDEX NO.:1-1.5 K.S. MODEL KST2000L WITH DIE INDEX NO.:1.5
	TE7510	.394 10.0	.657 16.7								
2X18 A.W.G. 2X1.0 mm ²	TE1008	.315 8.0	.594 15.1	.217 5.5	.280 7.1	.094 2.4	.083 2.1	RED 	YELLOW 	RED 	K.S. MODEL LY8-060 WITH DIE INDEX NO.: 2.5 K.S. MODEL KST2000L WITH DIE INDEX NO.:2.5
	TE1010	.394 10.0	.673 17.1								
2X16 A.W.G. 2X1.5 mm ²	TE1508	.315 8.0	.610 15.5	.252 6.4	.295 7.5	.102 2.6	.091 2.3	BLACK 	RED 	BLACK 	K.S. MODEL KST2000L WITH DIE INDEX NO.:2.5
	TE1510	.394 10.0	.689 17.5								
	TE1512	.472 12.0	.788 19.5								
	TE1515	.591 15.0	.886 22.5								
	TE1518	.709 18.0	1.004 25.5								
2X14 A.W.G. 2X2.5 mm ²	TE2510	.394 10.0	.728 18.5	.315 8.0	.235 8.5	.130 3.3	.114 2.9	GREY 	BLUE 	BLUE 	K.S. MODEL LY8-060 WITH DIE INDEX NO.:4 K.S. MODEL KST2000L WITH DIE INDEX NO.:4
	TE2512	.472 12.0	.807 20.5								
	TE2513	.512 13.0	.846 21.5								
	TE2518	.709 18.0	1.043 26.5								
2X12 A.W.G. 2X4 mm ²	TE4012	.472 12.0	.909 23.1	.339 8.6	.437 11.1	.165 4.2	.150 3.8	ORANGE 	GREY 	GREY 	K.S. MODEL LY8-060 WITH DIE INDEX NO.:6 K.S. MODEL KST8000-TC1208 WITH DIE INDEX NO.:2*12A

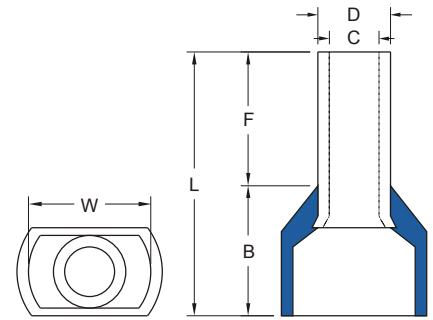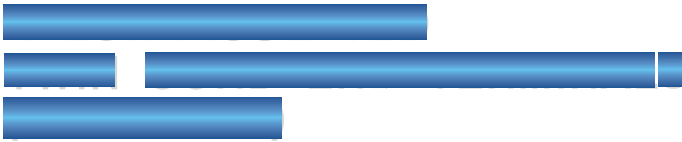

MAXIMUM ELECTRIC CURRENT:

A.W.G.	8	6
AMP.	70	95

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

CONNECTOR MATERIAL: COPPER TUBE.

INSULATION MATERIAL: NYLON

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION inch mm						FRENCH COLOR	GERMAN COLOR	DIN COLOR	CRIMPING TOOL
		F	L	W	B	D	C				
2X10 A.W.G. 2X6 mm ²	TE6014	.551 14.0	1.028 26.1	.374 9.5	.476 12.1	.209 5.3	.193 4.9	GREEN 	BLACK 	YELLOW 	K.S. MODEL KST8000-TC1208 WITH DIE INDEX NO.:2*10A
2X8 A.W.G. 2X10 mm ²	TE10-14	.551 14.0	1.047 26.6	.500 12.7	.496 12.6	.272 6.9	.256 6.5	BROWN 	IVORY 	RED 	K.S. MODEL KST8000-TC1208 WITH DIE INDEX NO.:2*8A
2X6 A.W.G. 2X16 mm ²	TE16-14	.551 14.0	1.232 31.3	.748 19.0	.681 17.3	.343 8.7	.327 8.3	IVORY 	GREEN 	BLUE 	K.S. MODEL KSTP-325-B WITH DIE INDEX NO.:E35

   ALL LISTED
© : NOT RU AND C-RU LISTED