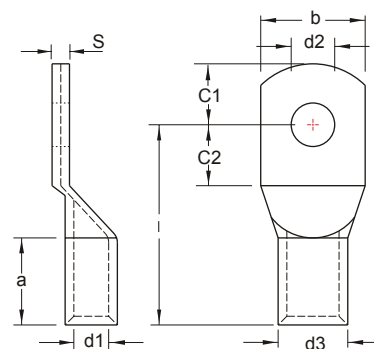


NON-INSULATED COPPER TUBULAR LUGS (TLK SERIES)


MAXIMUM ELECTRIC CURRENT:

A.W.G.	1/0	2/0	3/0
AMP.	230	265	310

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION mm									CRIMPING TOOL	Q'TY BOX
		a	b	C1	C2	d1	d2	d3	l	S		
1/0 A.W.G. 50 mm ²	TLK50-6	19.0	20.0	10.0	10.0	10.0	6.4	14.0	37.0	3.7	MODEL HPM400	100
	TLK50-8						8.4					100
	TLK50-10			10.5	39.0		100					
	TLK50-12		23.0	13.0	13.0		13.0	43.0	3.3	100		
	TLK50-14			14.5	14.5		15.0	45.0		100		
	TLK50-16			16.0	16.0		17.0	46.0		2.7		100
	TLK50-20		30.0	19.0	19.0		21.0	48.0	2.5	100		
2/0 A.W.G. 70 mm ²	TLK70-6	21.0	23.0	10.0	10.0	12.0	6.4	16.5	43.0	4.3	NOVOPRESS MODEL HPM400	50
	TLK70-8						8.4					50
	TLK70-10						10.5		44.0			50
	TLK70-12			13.0	13.0		13.0		46.0			50
	TLK70-13			14.5	14.5		14.0		48.0			50
	TLK70-14						15.0					50
	TLK70-16		28.0	16.0	16.0		17.0	50.0	3.5	50		
	TLK70-20		30.0	19.0	19.0		21.0	53.0	3.4	50		
3/0 A.W.G. 95 mm ²	TLK95-6	25.0	26.0	12.0	12.0	13.5	6.4	18.0	48.0	4.2	NOVOPRESS MODEL HPM400	50
	TLK95-8						8.4					50
	TLK95-10						10.5					50
	TLK95-12			13.0	13.0		13.0		49.0			50
	TLK95-14			14.5	14.5		15.0		51.0			50
	TLK95-16		28.0	16.0	16.0		17.0	54.0	4.0	25		
	TLK95-20		36.0	22.0	22.0		21.0	60.0	3.0	25		

UL cUL ALL LISTED