
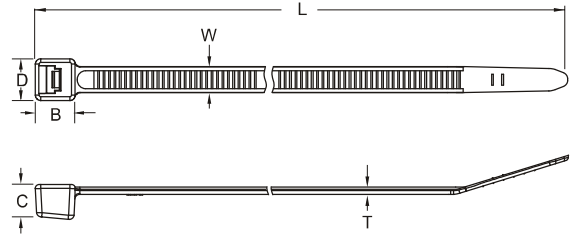


NYLON CABLE TIES

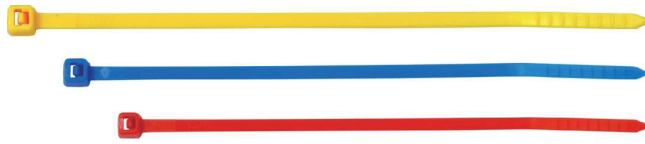

MATERIAL: NYLON 66

FLAMMABILITY RATING: UL94V-2

ITEM NO.	DIMENSION mm						BUNDLE DIA. mm		MIN TENSILE STRENGTH Kgs(lbs)	PACKING BAG
	L	W	B	C	D	T	MIN	MAX		
K-250SD	250	4.8	7.0	6.0	7.7	1.35	3.0	74	22(50)	100 PCS
K-300SD	300	4.8	7.4	6.0	8.3	1.4	3.0	80		
K-370SD	368	4.8	7.4	6.0	8.3	1.4	3.0	102		
K-430SD	432	4.8	8.1	6.0	8.2	1.45	3.0	125		
K-530SD	530	4.8	8.1	6.0	8.2	1.45	3.0	150		
K-150H	150	7.6	11.0	6.8	12.4	1.6	4.8	33	55(120)	100 PCS
K-200H	203	7.6	11.0	6.8	12.4	1.6	4.8	50		
K-250H	250	7.6	11.0	6.8	12.4	1.6	4.8	63		
K-280H	280	7.6	11.0	6.8	12.4	1.6	4.8	74		
K-300H	300	7.6	11.0	6.8	12.4	1.6	4.8	80		
K-340H	340	7.6	11.0	6.8	12.4	1.6	4.8	92		
K-370H	370	7.6	11.0	6.8	12.4	1.6	4.8	102		
K-380H	380	7.6	11.0	6.8	12.4	1.6	4.8	105		
K-450H	450	7.6	11.0	6.8	12.4	1.6	4.8	128		
K-500H	500	7.6	11.0	6.8	12.4	1.6	4.8	143		
K-550H	550	7.6	11.0	6.8	12.4	1.6	4.8	160		
K-750H	750	7.6	11.0	6.8	12.4	1.76	4.8	223		
K-430L	430	9.0	13.2	9.8	14.3	1.8	8.0	116	80(175)	100 PCS
K-450L	450	9.0	13.2	9.8	14.3	1.8	8.0	124		
K-550L	550	9.0	13.2	9.8	14.3	1.8	8.0	155		
K-610L	610	9.0	13.2	9.8	14.3	1.8	8.0	175		
K-710L	710	9.0	13.2	9.8	14.3	1.8	8.0	207		
K-780L	776	9.0	13.2	9.8	14.3	1.8	8.0	228		
K-810L	812	9.0	13.2	9.8	14.3	1.8	8.0	239		
K-920L	920	9.0	13.2	9.8	14.3	1.8	8.0	274		
K-1020L	1020	9.0	13.2	9.8	14.3	1.8	8.0	306		
K-1220L	1220	9.0	13.2	9.8	14.3	1.8	8.0	367		



ALL LISTED

★ STANDARD COLOR:

NATURE(WHITE)
 BLACK: -B
 BLUE: -BL
 GREEN: -GN
 GREY: -GY

RED: -RE
 YELLOW: -YL
 ORANGE: -OR
 PURPLE: -PP
 FLUORESCENCE YELLOW: -FYL

★ EX:

K-100M
 K-100M-B
 K-100M-YL