


Pillow blocks cast housing Adapter type

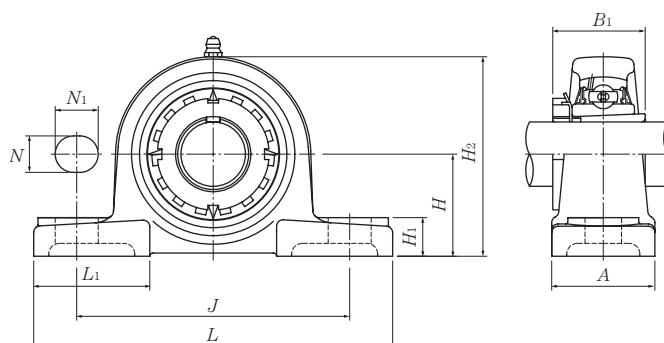

Shaft dia.	Unit number ^{1) 2) 3)}	Nominal dimensions										Bolt size	Bearing number ^{2) 3)}
		mm					inch						
		<i>H</i>	<i>L</i>	<i>J</i>	<i>A</i>	<i>N</i>	<i>N</i> ₁	<i>H</i> ₁	<i>H</i> ₂	<i>B</i> ₁	<i>L</i> ₁		
20 ¾	UKP205D1;H2305X UKP205D1;HE2305	36.5 1⅞	140 5½	105 4⅛	38 1½	13 ½	16 ⅝	15 ⅜	71 2⅔	35 1.378	42 1⅔	M10 ⅜	UK205D1;H2305X UK205D1;HE2305
25 ⅞ 1	UKP206D1;H2306X UKP206D1;HS2306 UKP206D1;HE2306X	42.9 1⅞	165 6½	121 4¾	48 1⅞	17 ⅔	20 ⅔	17 ⅔	83 3⅞	38 1.496	54 2⅛	M14 ½	UK206D1;H2306X UK206D1;HS2306 UK206D1;HE2306X
30 1⅛	UKP207D1;H2307X UKP207D1;HS2307	47.6 1⅞	167 6⅞	127 5	48 1⅞	17 ⅔	20 ⅔	18 ⅜	93 3⅔	43 1.693	54 2⅛	M14 ½	UK207D1;H2307X UK207D1;HS2307
35 1¼ 1⅜	UKP208D1;H2308X UKP208D1;HE2308X UKP208D1;HS2308X	49.2 1⅝	184 7¼	137 5⅓	54 2⅛	17 ⅔	20 ⅔	18 ⅜	98 3⅔	46 1.811	52 2⅛	M14 ½	UK208D1;H2308X UK208D1;HE2308X UK208D1;HS2308X
40 1⅞ 1½ 1⅝	UKP209D1;H2309X UKP209D1;HA2309 UKP209D1;HE2309X UKP209D1;HS2309X	54 2⅛	190 7⅝	146 5¾	54 2⅛	17 ⅔	20 ⅔	20 ⅔	106 4⅜	50 1.969	60 2⅜	M14 ½	UK209D1;H2309X UK209D1;HA2309 UK209D1;HE2309X UK209D1;HS2309X
45 1⅝ 1⅞ 1¾	UKP210D1;H2310X UKP210D1;HS2310 UKP210D1;HA2310 UKP210D1;HE2310X	57.2 2¼	206 8⅛	159 6¼	60 2⅜	20 ⅔	23 ⅔	21 ⅜	114 4½	55 2.165	65 2⅞	M16 ⅝	UK210D1;H2310X UK210D1;HS2310 UK210D1;HA2310 UK210D1;HE2310X
50 1⅞ 1⅝ 2	UKP211D1;H2311X UKP211D1;HS2311 UKP211D1;HA2311 UKP211D1;HE2311XY	63.5 2½	219 8⅝	171 6⅔	60 2⅜	20 ⅔	23 ⅔	23 ⅔	126 4⅓	59 2.323	65 2⅞	M16 ⅝	UK211D1;H2311X UK211D1;HS2311 UK211D1;HA2311 UK211D1;HE2311XY

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.


In this case the lock washer with the straight inner prong should be used.

3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 44 for size of grease fitting.

Pillow blocks cast housing Adapter type

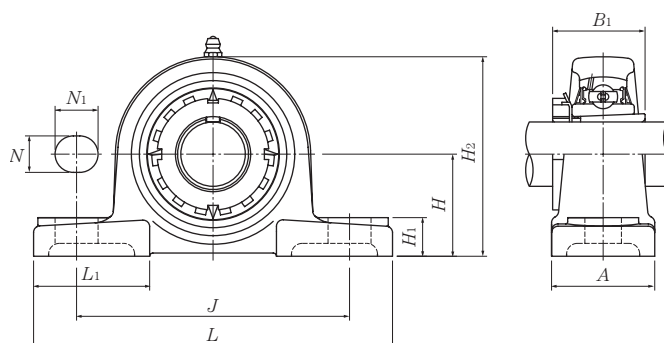

Shaft dia.	Unit number ^{1) 2) 3)}	Nominal dimensions										Bolt size	Bearing number ^{2) 3)}
		mm					inch						
		<i>H</i>	<i>L</i>	<i>J</i>	<i>A</i>	<i>N</i>	<i>N</i> ₁	<i>H</i> ₁	<i>H</i> ₂	<i>B</i> ₁	<i>L</i> ₁		
55 2¹/₈	UKP212D1;H2312X UKP212D1;HS2312	69.8 2 ³ / ₄	241 9 ¹ / ₂	184 7 ¹ / ₄	70 2 ³ / ₄	20 25 ³ / ₃₂	23 29 ³ / ₃₂	25 31 ³ / ₃₂	138 5 ⁷ / ₁₆	62 2.441	70 2 ³ / ₄	M16 5 ⁸ / ₈	UK212D1;H2312X UK212D1;HS2312
60 2³/₁₆ 2¹/₄ 2³/₈	UKP213D1;H2313X UKP213D1;HA2313 UKP213D1;HE2313X UKP213D1;HS2313X	76.2 3	265 10 ⁷ / ₁₆	203 8	70 2 ³ / ₄	25 31 ³ / ₃₂	28 1 ³ / ₃₂	27 1 ¹ / ₁₆	151 5 ¹⁵ / ₁₆	65 2.559	77 3 ¹ / ₃₂	M20 3 ⁴ / ₄	UK213D1;H2313X UK213D1;HA2313 UK213D1;HE2313X UK213D1;HS2313X
65 2⁷/₁₆ 2¹/₂	UKP215D1;H2315X UKP215D1;HA2315 UKP215D1;HE2315X	82.6 3 ¹ / ₄	275 10 ¹³ / ₁₆	217 8 ¹⁷ / ₃₂	74 2 ²⁹ / ₃₂	25 31 ³ / ₃₂	28 1 ³ / ₃₂	28 1 ³ / ₃₂	163 6 ¹³ / ₃₂	73 2.874	80 3 ⁵ / ₃₂	M20 3 ⁴ / ₄	UK215D1;H2315X UK215D1;HA2315 UK215D1;HE2315X
70 2¹¹/₁₆ 2³/₄	UKP216D1;H2316X UKP216D1;HA2316 UKP216D1;HE2316X	88.9 3 ¹ / ₂	292 11 ¹ / ₂	232 9 ¹ / ₈	78 3 ¹ / ₁₆	25 31 ³ / ₃₂	28 1 ³ / ₃₂	30 1 ³ / ₁₆	175 6 ⁷ / ₈	78 3.071	85 3 ¹¹ / ₃₂	M20 3 ⁴ / ₄	UK216D1;H2316X UK216D1;HA2316 UK216D1;HE2316X
75 2¹⁵/₁₆ 3	UKP217D1;H2317X UKP217D1;HA2317X UKP217D1;HE2317X	95.2 3 ³ / ₄	310 12 ⁷ / ₃₂	247 9 ²³ / ₃₂	83 3 ⁹ / ₃₂	25 31 ³ / ₃₂	28 1 ³ / ₃₂	32 1 ¹ / ₄	187 7 ³ / ₈	82 3.228	85 3 ¹¹ / ₃₂	M20 3 ⁴ / ₄	UK217D1;H2317X UK217D1;HA2317X UK217D1;HE2317X
80 3³/₁₆	UKP218D1;H2318X UKP218D1;HA2318X	101.6 4	327 12 ⁷ / ₈	262 10 ⁵ / ₁₆	88 3 ¹⁵ / ₃₂	27 1 ¹ / ₁₆	30 1 ³ / ₁₆	33 1 ⁵ / ₁₆	200 7 ⁷ / ₈	86 3.386	90 3 ¹⁷ / ₃₂	M22 7 ⁸ / ₈	UK218D1;H2318X UK218D1;HA2318X

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.

3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 44 for size of grease fitting.