


NON-INSULATED COPPER TUBULAR LUGS (TLKF SERIES)

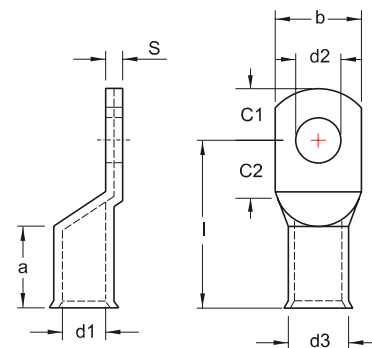

MAXIMUM ELECTRIC CURRENT:

A.W.G.	4/0	250	300
AMP.	360	405	445

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION mm									CRIMPING TOOL	Q'TY BOX
		a	b	C1	C2	d1	d2	d3	I	S		
4/0 A.W.G. 120 mm ²	TLKF120-8	26	28	14	14	15	8.4	19.5	51	4.3	NOVOPRESS MODEL HPM400	25
	TLKF120-10						10.5					25
	TLKF120-12						13					25
	TLKF120-14						15					25
	TLKF120-16		30	16	16		17		54	4.0		25
	TLKF120-20		36	22	22		21		63	3.5		25
250/300 MCM 150 mm ²	TLKF150-8	30	31	14	14	16.5	8.4	21	56	4.3	NOVOPRESS MODEL HPM400	25
	TLKF150-10						10.5					25
	TLKF150-12						13					25
	TLKF150-14						15					25
	TLKF150-16			16	16		17		58			25
	TLKF150-20		36	22	22		21		66	3.6		25

UL cUL ALL LISTED