

Technical data


32226U

Single row tapered roller bearings

Tapered roller bearing, pressed steel cage



VISUAL (S)

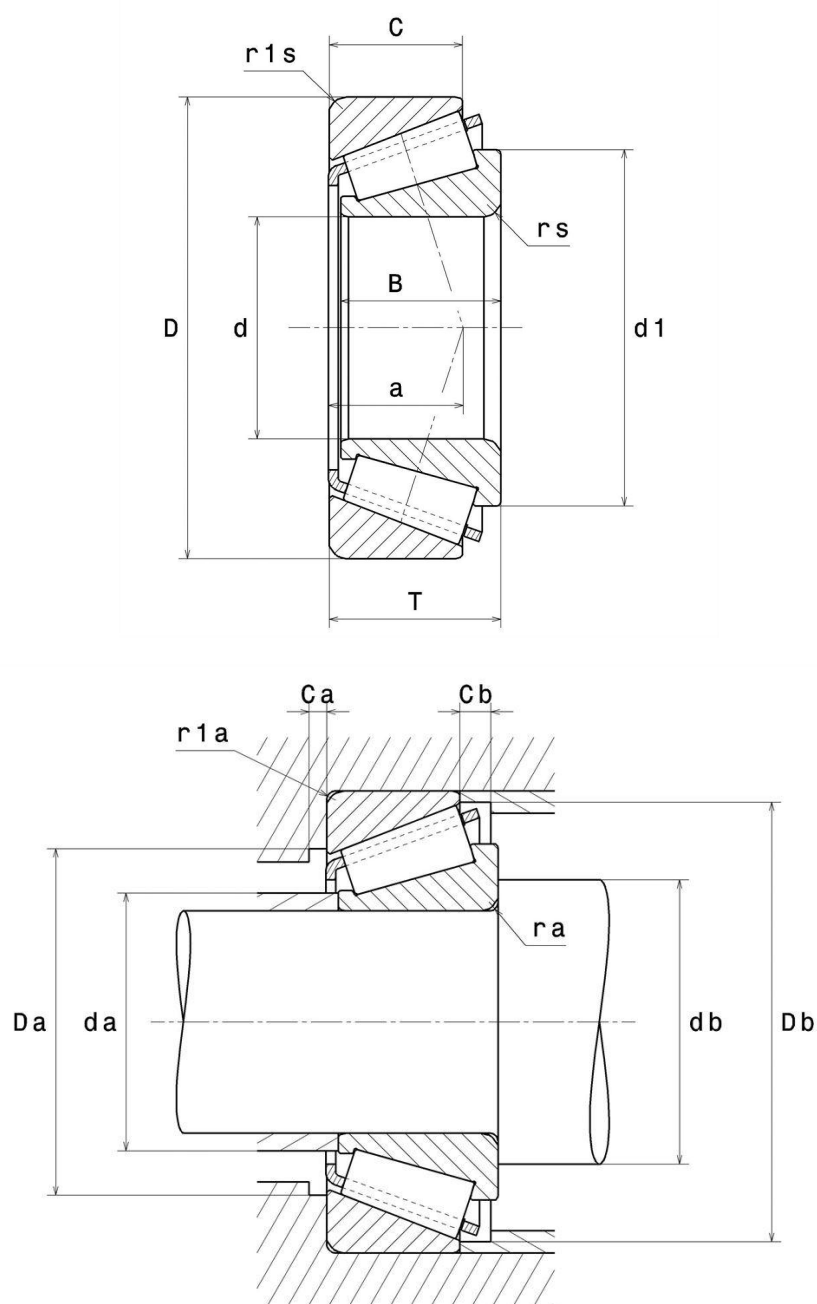

PRODUCT DEFINITION	
Brand	NTN
d - Internal diameter	130 mm
D - External diameter	230 mm
B - Bearing/Inner ring width	64 mm
C - Outer ring width	54 mm
T - Total width	67,75 mm
d1 - External diameter inner ring	180 mm
a - Charge load application point	57 mm
rs - Min fillet radius	4 mm
r1s - Min fillet radius	3 mm
Mass	11,3 kg
ISO 355 reference	T4FD130

PRODUCT PERFORMANCE	
C - Dynamic load	585 kN
C0 - Static load	815 kN
Cu - Fatigue limit load	83,5 kN
A2 - Rating life coefficient	1
e - Coefficient	0.44
Y0 - Static axial load coefficient	0.76
Y2 - Upper axial load coefficient	1.38
N lim - Oil lubrication limit speed	2000 tr/min
N lim - Grease lubrication limit speed	1500 tr/min
Tmin - Min operating temperature	-40 °C



PRODUCT PERFORMANCE

Tmax - Max operating temperature	120 °C
---	--------

ABUTMENT

da max - Max shoulder diameter IR	146 mm
db min - Min IR shoulder diameter	148 mm
Da min - Min shoulder diameter OR	193 mm
Da max - Max shoulder diameter OR	216 mm
Db min - Min OR shoulder diameter	219 mm
Ca - Min clearance	7 mm
Cb - Min clearance	13,5 mm
ra max - Max fillet radius	3 mm
r1a - Max fillet radius	2,5 mm



INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

$P = X.F_r + Y.F_a$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$P_0 = X_0.F_r + Y_0.F_a$

X_0	Y_0
0.5	Y0

If $P_0 \leq F_r$, then use $P_0 = F_r$

The values for e, Y2 and Y0 are shown in the above table

