

KA_{Type}

Size: 75mm

Stainless Steel Rigid Bracket



PKA-75

PNAKA-75

Unit:mm												
Size 	Model Number	Wheel	Bearing	Load Capacity								Weight (g) 
												
				(daN)	(kgf)							
75	■Nylon											
	PKA-75	Nylon		100	102.0	32	10	101	91/68	63/40	9.5	310
	PBKA-75	Nylon	B/B	120	122.4							370
	PBDKA-75	Nylon	SUS									370
	■Nylon Rim·Rubber Wheel											
	PNKA-75	Rubber	B/B	70	71.4	32	10	101	91/68	63/40	9.5	400
	PNDKA-75	Rubber	SUS									400
	PNAKA-75	Rubber										360
	■Nylon Rim·Urethane Rubber Wheel											
	PNUKA-75	Urethane	B/B	100	102.0	32	10	101	91/68	63/40	9.5	390
	PNUDKA-75	Urethane	SUS									390
	PNUAKA-75	Urethane										340
	■Monomer Cast Nylon											
	UWBKA-75	MC Nylon	B/B	150	153.0	24	10	101	91/68	63/40	9.5	410
	UWBDKA-75	MC Nylon	SUS									410
	UWAKA-75	MC Nylon										370
	UWBSKA-75	MC Nylon	B/B			26						390
	UWBSDKA-75	MC Nylon	SUS									390
	■Steel Rim·Rubber Wheel Wheel rim is not stainless steel.											
	SKA-75	Rubber	B/B	80	81.6	32	10	101	91/68	63/40	9.5	420
	SRKA-75	Red Rubber	B/B	60	61.2							420
	CRKA-75	Heat-resistance	B/B	80	81.6							440
	■Steel Rim·Urethane Rubber Wheel Wheel rim is not stainless steel.											
	SUIKA-75	Urethane	B/B	120	122.4	32	10	101	91/68	63/40	9.5	500
	SUIEKA-75	Anti-Static	B/B									500


Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

 Build-to-order manufacturing

● The materials of KA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

KA_{Type}

Size: 100mm

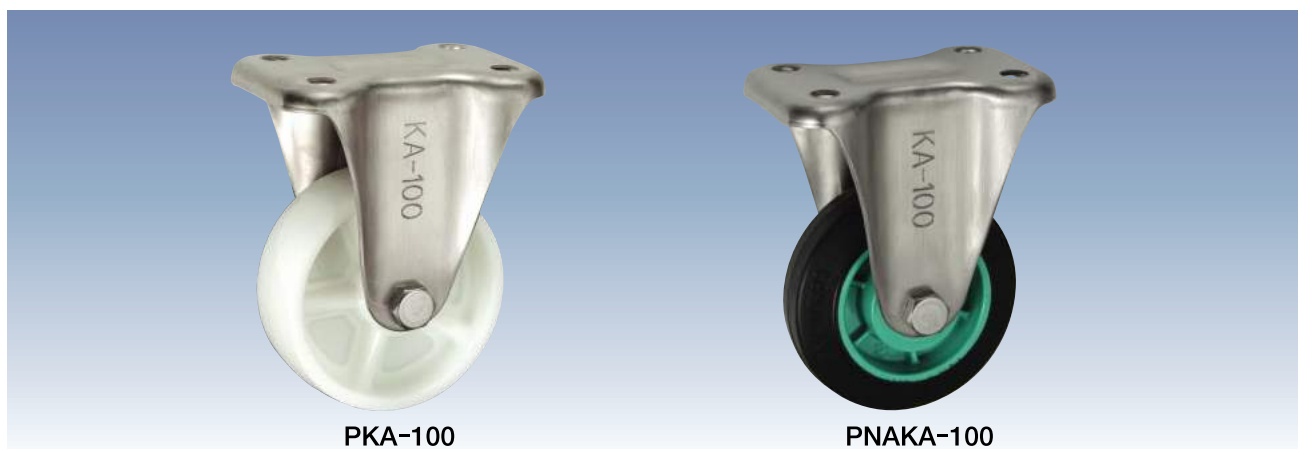Stainless Steel Rigid Bracket

PKA-100
PNAKA-100

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 						
																		
				(daN)	(kgf)													
100	■Nylon																	
	PKA-100	Nylon		120	122.4	35	12	144	115/80	80/45	11	580						
	PBKA-100	Nylon	B/B	180	183.6							640						
	PBDKA-100	Nylon	SUS									640						
	■Nylon Rim・Rubber Wheel																	
	PNKA-100	Rubber	B/B	100	102.0	32	12	144	115/80	80/45	11	680						
	PNDKA-100	Rubber	SUS									680						
	PNAKA-100	Rubber										620						
	■Nylon Rim・Urethane Rubber Wheel																	
	PNUKA-100	Urethane	B/B	150	153.0	32	12	144	115/80	80/45	11	660						
	PNUDKA-100	Urethane	SUS									660						
	PNUAKA-100	Urethane		100	102.0							600						
	■Monomer Cast Nylon																	
	UWBKA-100	MC Nylon	B/B	200	204.0	29	12	144	115/80	80/45	11	790						
	UWBDKA-100	MC Nylon	SUS									790						
	UWAKA-100	MC Nylon										740						
	UWBSKA-100	MC Nylon	B/B			30						740						
	UWBSDKA-100	MC Nylon	SUS									740						
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.																	
	SKA-100	Rubber	B/B	130	132.6	35	12	144	115/80	80/45	11	780						
	SRKA-100	Red Rubber	B/B									780						
	CRKA-100	Heat-resistance	B/B									130	132.6	810				
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.																	
	SUIKA-100	Urethane	B/B	180	183.6	32	12	144	115/80	80/45	11	850						
	SUIEKA-100	Anti-Static	B/B									850						

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

 Build-to-order manufacturing

● The materials of KA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

KA Type

Size: 130mm

Stainless Steel Rigid Bracket



PKA-130

PNAKA-130

Unit: mm												
Size 	Model Number	Wheel	Bearing	Load Capacity		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 
				(daN)	(kgf)							
130	■Nylon											
	PKA-130	Nylon		150	153.0	42	20	177	137/93	100/56	11	1,130
	PBKA-130	Nylon	B/B	250	255.0							1,330
	PBDKA-130	Nylon	SUS									1,330
	■Nylon Rim・Rubber Wheel											
	PNKA-130	Rubber	B/B	145	147.9	38	20	177	137/93	100/56	11	1,390
	PNDKA-130	Rubber	SUS									1,390
	PNAKA-130	Rubber										120
	■Nylon Rim・Urethane Rubber Wheel											
	PNUKA-130	Urethane	B/B	200	204.0	35	20	177	137/93	100/56	11	1,330
	PNUDKA-130	Urethane	SUS									1,330
	PNUAKA-130	Urethane										120
	■Monomer Cast Nylon											
	UWBKA-130	MC Nylon	B/B	300	306.0	36	20	177	137/93	100/56	11	1,610
	UWBDKA-130	MC Nylon	SUS									1,610
	UWAKA-130	MC Nylon										1,460
	UWBSKA-130	MC Nylon	B/B			30						1,350
	UWBSDKA-130	MC Nylon	SUS									1,350
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.											
	SKA-130	Rubber	B/B	180	183.6	42	20	177	137/93	100/56	11	1,590
	SRKA-130	Red Rubber	B/B	140	142.8							1,590
	CRKA-130	Heat-resistance	B/B	180	183.6							1,620
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.											
	SUIKA-130	Urethane	B/B	250	255.0	35	20	177	137/93	100/56	11	1,720
	SUIEKA-130	Anti-Static	B/B									1,720

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing

 Build-to-order manufacturing

● The materials of KA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

KA_{Type}

Size: 150mm

Stainless Steel Rigid Bracket



PKA-150



PNAKA-150

Unit: mm

Size 	Model Number	Wheel	Bearing	Load Capacity		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 
												
				(daN)	(kgf)							
150	■Nylon											
	PKA-150	Nylon		180	183.6	45	20	198	137/93	100/56	11	1,370
	PBKA-150	Nylon	B/B	300	306.0							1,610
	PBDKA-150	Nylon	SUS									1,610
	■Nylon Rim・Rubber Wheel											
	PNKA-150	Rubber	B/B	175	178.5	38	20	198	137/93	100/56	11	1,630
	PNDKA-150	Rubber	SUS									1,630
	PNAKA-150	Rubber		140	142.8							1,470
	■Nylon Rim・Urethane Rubber Wheel											
	PNUKA-150	Urethane	B/B	250	255.0	38	20	198	137/93	100/56	11	1,590
	PNUDKA-150	Urethane	SUS									1,590
	PNUAKA-150	Urethane		150	153.0							1,400
	■Monomer Cast Nylon											
	UWBKA-150	MC Nylon	B/B	350	357.0	40	20	198	137/93	100/56	11	2,050
	UWBDKA-150	MC Nylon	SUS									2,050
	UWAKA-150	MC Nylon				30						1,900
	UWBSKA-150	MC Nylon	B/B									1,650
	UWBSDKA-150	MC Nylon	SUS									1,650
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.											
	SKA-150	Rubber	B/B	200	204.0	45	20	198	137/93	100/56	11	1,920
	SRKA-150	Red Rubber	B/B	160	163.2							1,920
	CRKA-150	Heat-resistance	B/B	200	204.0							1,960
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.											
	SUIKA-150	Urethane	B/B	300	306.0	38	20	198	137/93	100/56	11	2,110
	SUIEKA-150	Anti-Static	B/B									2,110

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing


 Build-to-order manufacturing

● The materials of KA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

KA Type

Size: 200mm

Stainless Steel Rigid Bracket

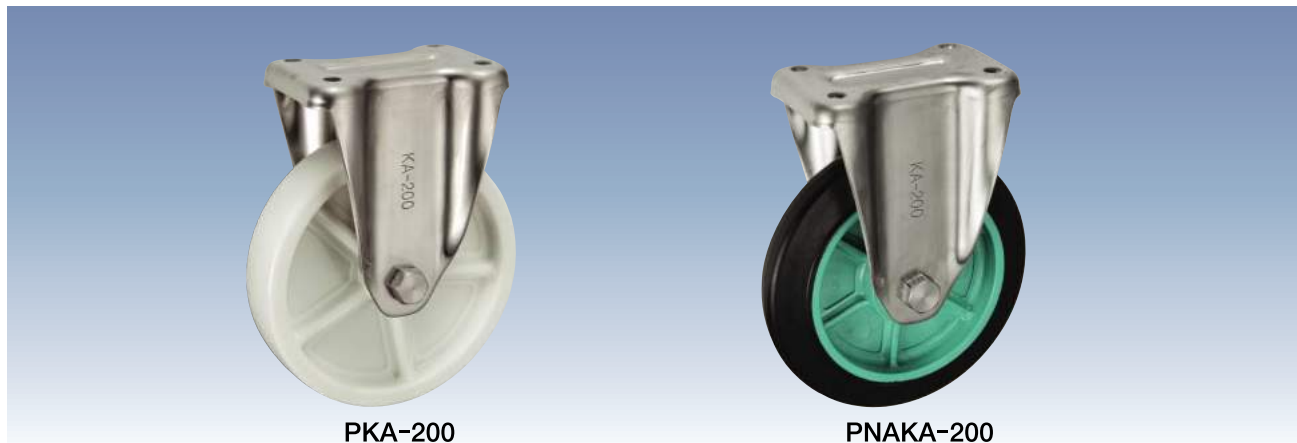

PKA-200

PNAKA-200

Unit: mm																	
Size 	Model Number	Wheel	Bearing	Load Capacity 		Tire Width R 	Shaft Diameter D 	Overall Height H1 	Plate Size F1/F2 	Mounting Hole Spacing P1/P2 	Plate Hole d 	Weight (g) 					
				(daN)	(kgf)												
200	■Nylon																
	PKA-200	Nylon		250	255.0	45	20	250	151/102	112/63	11	2,310					
	PBKA-200	Nylon	B/B	400	408.0							2,520					
	PBDKA-200	Nylon	SUS									2,520					
	■Nylon Rim・Rubber Wheel																
	PNKA-200	Rubber	B/B	220	224.4	42	20	250	151/102	112/63	11	2,590					
	PNDKA-200	Rubber	SUS									2,590					
	PNAKA-200	Rubber										160	163.2	2,420			
	■Nylon Rim・Urethane Rubber Wheel																
	PNUKA-200	Urethane	B/B	350	357.0	42	20	250	151/102	112/63	11	2,460					
	PNUDKA-200	Urethane	SUS									2,460					
	PNUAKA-200	Urethane										250	255.0	2,290			
	■Monomer Cast Nylon																
	UWBKA-200	MC Nylon	B/B	500	510.0	42	20	250	151/102	112/63	11	3,470					
	UWBDKA-200	MC Nylon	SUS									3,470					
	UWAKA-200	MC Nylon										3,320					
	UWBSKA-200	MC Nylon	B/B			34						20	250	151/102	112/63	11	2,930
	UWBSDKA-200	MC Nylon	SUS														2,930
	■Steel Rim・Rubber Wheel Wheel rim is not stainless steel.																
	SKA-200	Rubber	B/B	250	255.0	45	20	250	151/102	112/63	11	3,240					
	SRKA-200	Red Rubber	B/B	200	204.0							3,240					
	SHKA-200	High-Rebound	B/B	250	255.0							3,240					
	CRKA-200	Heat-resistance	B/B									3,320					
	■Steel Rim・Urethane Rubber Wheel Wheel rim is not stainless steel.																
	SUIKA-200	Urethane	B/B	400	408.0	42	20	250	151/102	112/63	11	3,410					
	SUIEKA-200	Anti-Static	B/B									3,410					

Bearing: No mark -- Spindle sleeve, B/B -- Steel bearing, SUS -- Stainless steel bearing


 Build-to-order manufacturing

●The materials of KA Type bracket are all stainless steel (SUS 304 / 18-8 stainless).

KA_{Type}

Stainless Steel Rigid Bracket

Stainless Steel Caster Series

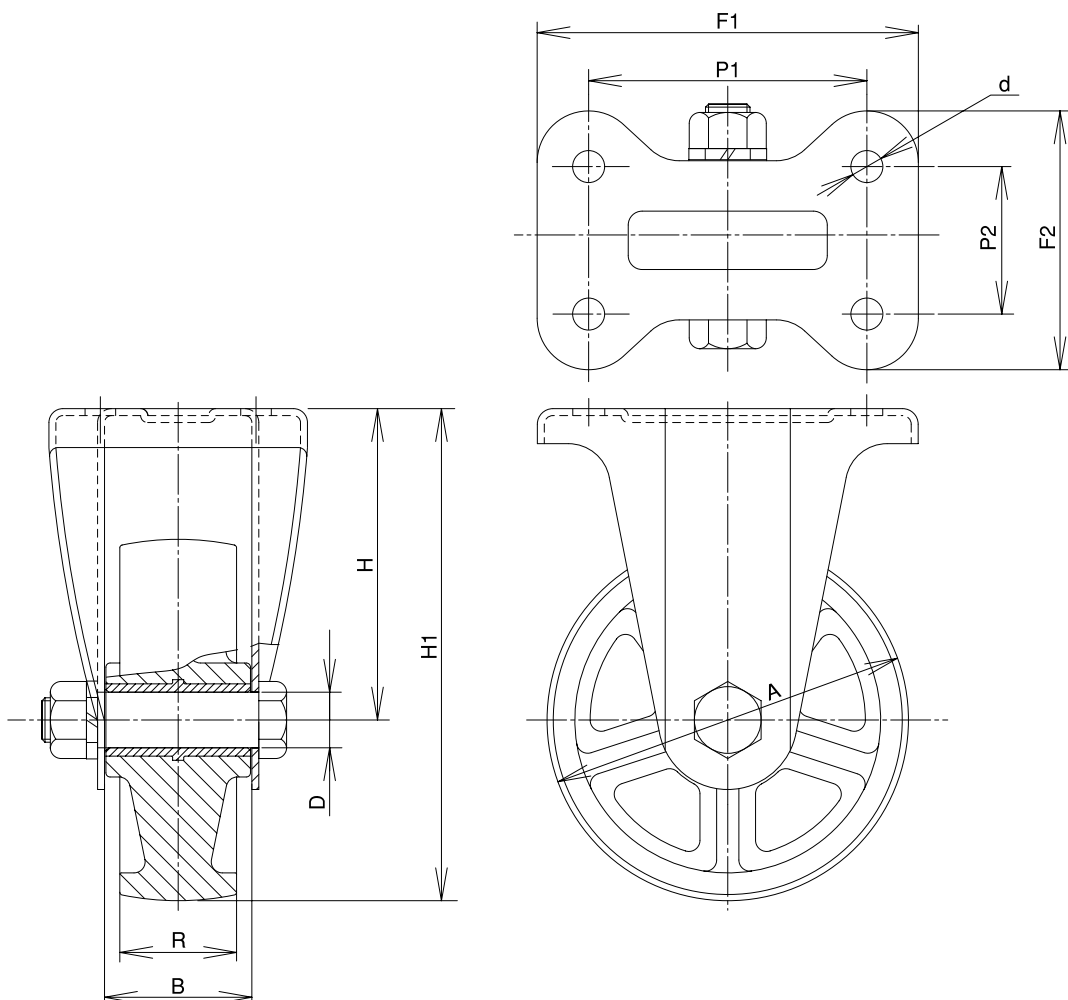

【Bracket Dimensions】

Unit: mm

Size 	Load Capacity 		Bracket Height H 	Bracket Width B 	Weight (g) 
	(daN)	(kgf)			
75	150	153.0	63	40	220
100	200	204.0	94	43	420
130	300	306.0	112	53	810
150	350	357.0	123	56	960
200	500	510.0	150	56	1,570

* The shaft set is included in the bracket.

Notice

The materials of KA Type bracket are all stainless steel, but the following wheels are not stainless steel. In addition, stainless steel bearings cannot be set.

Please be careful when selecting a caster.

Steel Rim • Rubber Wheel (S, SR, SH, CR Type)

Steel Rim • Urethane Wheel (SUI, SUIE Type)