


**NTN BEARING CORPORATION OF AMERICA**

Head Office

1600 E. Bishop Court, P.O. Box 7604

Mount Prospect, IL 60056-7604, U.S.A.

**Phone:** 847-298-7500

**Fax:** 847-699-9744

**Toll Free:** 800-323-2358

**Email:** [mkt@ntnamerica.com](mailto:mkt@ntnamerica.com)

**Website:** [www.ntnamericas.com](http://www.ntnamericas.com)

## Item # UCP206D1, Pillow Block Unit, Cast Housing, Set Screw, UCP/UCPX Type



[Order Now](#) | [Technical Specifications](#) | [Dimensional Specifications](#)

### Order Now

#### Ordering Options

**FIND A DISTRIBUTOR**

**CONTACT NTN CUSTOMER SUPPORT SPECIALIST**


**ORDER THROUGH NTN DOL (AUTHORIZED DISTRIBUTORS ONLY)**

### Technical Specifications

|              |                   |
|--------------|-------------------|
| Type         | Pillow Block Unit |
| Bearing Type | Ball Bearing      |

|                             |                     |
|-----------------------------|---------------------|
| Locking Device              | Set Screw           |
| Seal Type                   | Contact             |
| Seal Material               | Nitrile Rubber      |
| Bearing Number              | UC206D1             |
| Housing Number              | P206D1              |
| Housing Material            | Cast Iron           |
| Housing Construction        | 1 Piece             |
| Performance                 | Light Duty          |
| End Type                    | Open                |
| Dynamic Load Rating         | 19500 N<br>19.50 kN |
| Static Load Rating          | 11300 N<br>11.30 kN |
| Rotational Speed [Max]      | 4900 RPM            |
| Weight                      | 1.339 kg            |
| Operating Temperature Range | -40 to 120 °C       |
| Lubrication                 | Relubricatable      |

Dimensional Specifications

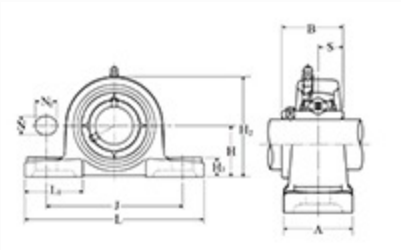

Pillow Block Unit, Cast Housing, Set Screw, UCP/UCPX Type - Dimensions

|   |           |
|---|-----------|
| d | 30.000 mm |
| J | 121.0 mm  |

|           |           |
|-----------|-----------|
| <b>L</b>  | 165.0 mm  |
| <b>A</b>  | 48.0 mm   |
| <b>H</b>  | 42.9 mm   |
| <b>H1</b> | 17.0 mm   |
| <b>H2</b> | 83.0 mm   |
| <b>L1</b> | 54.0 mm   |
| <b>N</b>  | 17.0 mm   |
| <b>N1</b> | 20.0 mm   |
| <b>B</b>  | 38.100 mm |
| <b>S</b>  | 15.9 mm   |
| <b>F</b>  | 4.6 mm    |