


NON-INSULATED COPPER TUBULAR LUGS (TLK-90D SERIES)

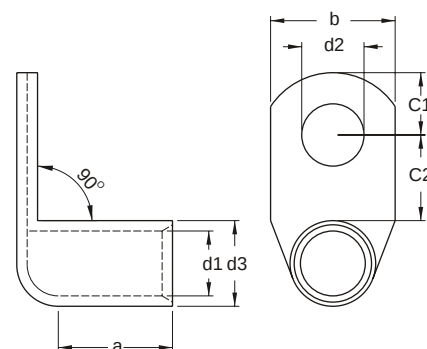

MAXIMUM ELECTRIC CURRENT:

A.W.G.	4/0	250	300	350	400
AMP.	360	405	445	505	545

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION mm							CRIMPING TOOL	Q'TY BOX
		a	b	C1	C2	d1	d2	d3		
4/0 A.W.G. 120 mm ²	TLK120-6-90D	26.0	28.0	14.0	17.0	15.0	6.4	19.0	NOVOPRESS MODEL HPM400	25
	TLK120-8-90D				16.0		8.4			25
	TLK120-10-90D				17.0		10.5			25
	TLK120-12-90D				18.0		13.0			25
	TLK120-14-90D		30.0	15.0	20.0		15.0			25
	TLK120-16-90D			16.0	22.0		17.0			25
	TLK120-20-90D			22.0	24.0		21.0			25
250/300 MCM 150 mm ²	TLK150-8-90D	30.0	31.0	14.0	16.0	16.5	8.4	21.0	NOVOPRESS MODEL HPM400	25
	TLK150-10-90D				17.0		10.5			25
	TLK150-12-90D			15.0	18.0		13.0			25
	TLK150-14-90D				20.0		15.0			25
	TLK150-16-90D			16.0	22.0		17.0			25
	TLK150-20-90D			22.0	24.0		21.0			25
300/350 MCM 185 mm ²	TLK185-10-90D	30.0	35.0	18.0	22.0	19.0	10.5	24.0	NOVOPRESS MODEL HPM400	10
	TLK185-12-90D						13.0			10
	TLK185-14-90D						15.0			10
	TLK185-16-90D						17.0			10
	TLK185-20-90D						21.0			10
400 MCM 240 mm ²	TLK240-10-90D	35.0	39.0	21.5	22.0	21.0	10.5	26.0	NOVOPRESS MODEL HPM400	10
	TLK240-12-90D						13.0			10
	TLK240-14-90D						15.0			10
	TLK240-16-90D						17.0			10
	TLK240-20-90D				24.0		21.0			10



ALL LISTED

⊙ : NOT UL AND C-UL LISTED

* : DEVELOPING ON DEMAND