


DIN 46341 Equivalent

NON-INSULATED PARALLEL & BUTT CONNECTORS

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16	14	12	10	8	6	4	2	1/0
AMP.	9	12	17	18	30	35	50	70	95	125	170	230

MATERIAL: COPPER TUBULAR

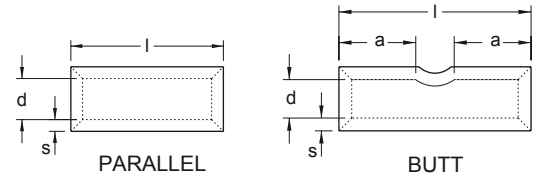

WIRE RANGE A.W.G. mm ²	ITEM NO.			DIMENSION ^{inch} mm				CRIMPING TOOL	Q'TY BOX
	PARALLEL	l	BUTT	l	a	d	s		
22-16 A.W.G. 0.5-1.5 mm ²	DPNT1	.315 8.0	DBNT1	.591 15.0	.197 5.0	.063 1.6	.031 0.8	IZUMI MODEL 5N18 WITH DIE INDEX NO:1.25 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:22-18	1000
16-14 A.W.G. 1.5-2.5 mm ²	DPNT2.5	.315 8.0	DBNT2.5	.591 15.0	.197 5.0	.091 2.3	.035 0.9	IZUMI MODEL 5N18 WITH DIE INDEX NO:2 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:16-14	1000
	DPNT2.5-5	.197 5.0							
12-10 A.W.G. 2.5-6 mm ²	DPNT6	.354 9.0	DBNT6	.591 15.0	.236 6.0	.142 3.6	.039 1.0	IZUMI MODEL 5N18 WITH DIE INDEX NO:5.5 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:12-10	1000
	DPNT6-5	.197 5.0							
	DPNT6-7	.276 7.0							
8 A.W.G. 10 mm ²	DPNT10	.394 10.0	DBNT10	.827 21.0	.315 8.0	.177 4.5	.043 1.1	IZUMI MODEL 5N18 WITH DIE INDEX NO:8 OR K.S. MODEL KST2000D-1322 WITH DIE INDEX NO:8	1000/500
6 A.W.G. 16 mm ²	DPNT16	.433 11.0	DBNT16	1.024 26.0	.394 10.0	.228 5.8	.047 1.2	KLAUKE MODEL PK 25 WITH DIE INDEX NO:HQ25/16	1000/500
	DPNT16-10	.394 10.0							
4 A.W.G. 25 mm ²	DPNT25	.551 14.0	DBNT25	1.142 29.0	.433 11.0	.295 7.5	.059 1.5	KLAUKE MODEL PK 25 WITH DIE INDEX NO:HQ25/25	1000/250
2 A.W.G. 35 mm ²	DPNT35	.630 16.0	DBNT35	1.260 32.0	.472 12.0	.354 9.0	.063 1.6	KLAUKE MODEL PK 25 WITH DIE INDEX NO:HQ25/35	1000/200
1/0 A.W.G. 50 mm ²	DPNT50	.748 19.0	DBNT50	1.496 38.0	.630 16.0	.433 11.0	.071 1.8	KLAUKE MODEL PK 25 WITH DIE INDEX NO:HQ25/50	500/50

UL cUL ALL LISTED