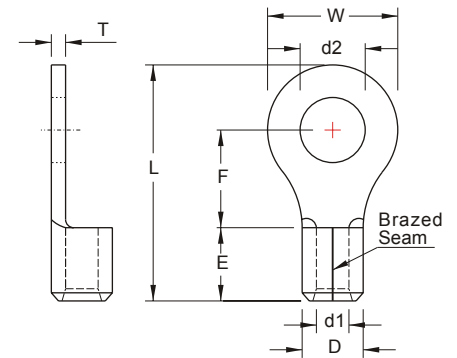


NON-INSULATED RING TERMINALS


MAXIMUM ELECTRIC CURRENT:

A.W.G.	4	2
AMP.	125	170

TERMINAL MATERIAL: COPPER
SURFACE TREATMENT: TIN PLATED

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION ^{inch} mm						CRIMPING TOOL	Q'TY BOX		
	BRAZED SEAM	BUTTED SEAM	d2		W	F	L	E	D	d1			T	
4 A.W.G. 22 mm ²	RNB22-4		#8	.169 4.3	.480 12.2	.594 15.1	1.307 33.2	.465 11.8	.453 11.5	.303 7.7	.067 1.7	IZUMI MODEL 9H-60 (EP-38) WITH DIE INDEX NO.:22 OR K.S. MODEL KH-120 LY-2045E WITH DIE INDEX NO.:22 OR 25	250	
	RNBS22-5		#10	.209 5.3									250	
	RNBL22-5		#10	.209 5.3	.650 16.5	.531 13.5	1.319 33.5						250	
	RNBS22-6		1/4	.252 6.4	.480 12.2	.594 15.1	1.299 33.0						250	
	RNBL22-6		1/4	.252 6.4	.650 16.5	.531 13.5	1.319 33.5						250	
	RNBS22-8		5/16	.331 8.4	.480 12.2	.594 15.1	1.307 33.2						250	
	RNB22-8		5/16	.331 8.4	.650 16.5	.531 13.5	1.319 33.5						250	
	RNB22-10		3/8	.413 10.5									250	
	RNBL22-10		3/8	.413 10.5	.689 17.5	.630 16.0	1.445 36.7						200	
	RNB22-11		7/16	.453 11.5	.866 22.0	.776 19.7	1.673 42.5						200	
	RNB22-12		1/2	.512 13.0									200	
	RNB22-14		9/16	.591 15.0	1.181 30.0	.953 24.2	2.008 51.0						200	
	RNB22-16		5/8	.669 17.0									200	
	RNB22-18		11/16	.748 19.0									200	
	RNB22-20		3/4	.827 21.0									200	
	RNB22-22		7/8	.906 23.0									200	
2 A.W.G. 38 mm ²	RNB38-5		#10	.209 5.3	.602 15.3	.685 17.4	1.535 39.0	.551 14.0	.524 13.3	.370 9.4	.071 1.8	IZUMI MODEL 9H-60 (EP-38) WITH DIE INDEX NO.:38 OR K.S. MODEL KH-120 WITH DIE INDEX NO.:35	200	
	RNBS38-6		1/4	.252 6.4									200	
	RNBL38-6		1/4	.252 6.4	.866 22.0	.697 17.7	1.681 42.7						200	
	RNBS38-8		5/16	.331 8.4	.602 15.3	.685 17.4	1.535 39.0						200	
	RNBL38-8		5/16	.331 8.4	.866 22.0	.697 17.7	1.681 42.7						200	



ALL LISTED

* : ADDITIONAL CERTIFIED

■ : 90D available

Products can be bend to 90-degrees angle.