

## G Series Internal Snap Ring Pliers, Straight Tips



- Forged and formed from Cr-V materials with greater strength
- Special tip design with higher gripping force
- Antirust surface with high-quality black finish

No.	Spec.	Tip Diameter Ø(mm)	Tip Length (mm)	Applicable Snap Ring Range D(mm)			
73030	5"	0.9	1.2	8-13	6	120	16
73031	5"	1.3	1.5	12-25	6	120	16
73032	7"	1.8	2.5	19-60	6	120	24
73033	9"	2.3	3.5	40-100	6	60	17
73034	13"	3.2	4.5	85-140	6	60	28

## G Series Internal Snap Ring Pliers, Curved Tips



- Forged and formed from Cr-V materials with greater strength
- Special tip design with higher gripping force
- Antirust surface with high-quality black finish


No.	Spec.	Tip Diameter Ø(mm)	Tip Length (mm)	Applicable Snap Ring Range D(mm)			
73040	5"	0.9	1.2	8-13	6	60	8.5
73041	5"	1.3	1.5	12-25	6	60	8.5
73042	7"	1.8	2.5	19-60	6	60	13
73043	9"	2.3	3.5	40-100	6	60	17
73044	13"	3.2	4.5	85-140	6	60	28

## Quick Release Locking Pliers, Curved Jaw



No.	Spec.	L(mm)	Maximum opening(mm)			
71001	7"	190	51	6	48	22.5
71002	10"	220	63	6	36	24.8

## Locking Pliers, Curved Jaw

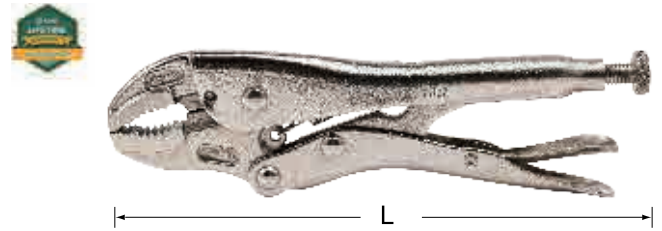

- Jaw made of Cr-Mo for high toughness
- Body made of high alloy steel without deformation
- Screw-rod fine tuning knob, facilitating clamping size adjustment
- Round jaw capable of cutting


No.	Spec.	L(mm)	Maximum opening(mm)			
71101	5"	144	37	6	24	5.4
71102	7"	186	51	6	36	14
71103	10"	244	63	6	36	20.6

## Quick Release Locking Pliers, Straight Jaw



No.	Spec.	L(mm)	Maximum opening(mm)			
71105	5"	144.3	37	6	72	18.5
71106	7"	186	51	6	48	22.1
71107	10"	226	63	6	36	24.6

## Locking Pliers, Straight Jaw

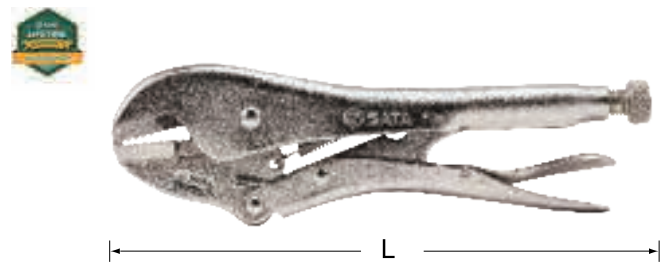

- Jaw made of Cr-Mo for high toughness
- Body made of high alloy steel without deformation
- Screw-rod fine tuning knob, facilitating clamping size adjustment
- Round jaw capable of cutting

No.	Spec.	L(mm)	Maximum opening(mm)			
71202	7"	185	51	6	24	10.8
71203	10"	224	57	6	36	21.5