

Medium duty casters

PH series




200~600kg



RoHS



-10~90°C

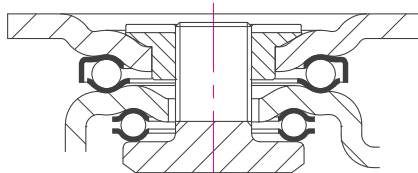

Brackets: Pressed steel plate, double ball bearing with four hardened bearing seats in the swivel head which is advantageous to rapid swiveling and excellent durability, strong integrated pressed steel frame, smooth-operating top brake system, bolted wheel axle structure

Surface Treatment: Powder coating, zinc plated

* Recommended Load = Load Cap. × 3

Swivel	Rigid	Swivel with brake	Wheel type	mm	mm	Kg	mm	mm	mm	mm	mm
PH-130-ASF	PH-130-ARF	PH-130-BSF	HUWD	130	48	500	186	50	100x85	80x60 77x45	9
PH-150-ASF	PH-150-ARF	PH-150-BSF		150	48	600	206	50			
PH-100-ASF	PH-100-ARF	PH-100-BSF	MCD	100	48	600	156	50	100x85	80x60 77x45	9
PH-130-ASF	PH-130-ARF	PH-130-BSF		130	48	600	186	50			
PH-150-ASF	PH-150-ARF	PH-150-BSF	NYD	150	48	600	206	50	100x85	80x60 77x45	9
PH-100-ASF	PH-100-ARF	PH-100-BSF		100	48	600	156	50			
PH-130-ASF	PH-130-ARF	PH-130-BSF		130	48	600	186	50			
PH-150-ASF	PH-150-ARF	PH-150-BSF		150	48	600	206	50			

Options

Code Suffix	MCD	HUWD	NYD	-FZN	-WEU	
Description	MC nylon(D80)	Cast PU(A95)	High-Performance Nylon(D70)	Zinc-plated frame	Anti-static(Black)	
Available for	100 ~ 150	130 ~ 150	100 ~ 150	100 ~ 150	100 ~ 150	