


WEATHER RESISTANT NYLON CABLE TIES

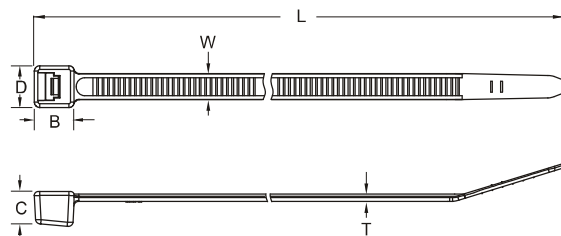

MATERIAL: WEATHER RESISTANT NYLON 66 (ULTRAVIOLET)
FLAMMABILITY RATING: UL94V-2
COLOR: BLACK

ITEM NO.	DIMENSION mm						BUNDLE DIA. mm		MIN TENSILE STRENGTH Kgs(lbs)	PACKING BAG
	L	W	B	C	D	T	MIN	MAX		
K-200SDU	203	4.8	7.0	6.0	7.7	1.3	3.0	55	22(50)	100 PCS
K-250SDU	250	4.8	7.0	6.0	7.7	1.35	3.0	74		
K-300SDU	300	4.8	7.4	6.0	8.3	1.4	3.0	80		
K-370SDU	368	4.8	7.4	6.0	8.3	1.4	3.0	102		
K-430SDU	432	4.8	8.1	6.0	8.2	1.45	3.0	125		
K-530SDU	530	4.8	8.1	6.0	8.2	1.45	3.0	150		
K-150HU	150	7.6	11.0	6.8	12.4	1.6	4.8	33	55(120)	100 PCS
K-200HU	203	7.6	11.0	6.8	12.4	1.6	4.8	50		
K-250HU	250	7.6	11.0	6.8	12.4	1.6	4.8	63		
K-280HU	280	7.6	11.0	6.8	12.4	1.6	4.8	74		
K-300HU	300	7.6	11.0	6.8	12.4	1.6	4.8	80		
K-340HU	340	7.6	11.0	6.8	12.4	1.6	4.8	92		
K-370HU	370	7.6	11.0	6.8	12.4	1.6	4.8	102		
K-380HU	380	7.6	11.0	6.8	12.4	1.6	4.8	105		
K-450HU	450	7.6	11.0	6.8	12.4	1.6	4.8	128		
K-500HU	500	7.6	11.0	6.8	12.4	1.6	4.8	143		
K-550HU	550	7.6	11.0	6.8	12.4	1.6	4.8	160		
K-750HU	750	7.6	11.0	6.8	12.4	1.76	4.8	223		
K-430LU	430	9.0	13.2	9.8	14.3	1.8	8.0	116	80(175)	100 PCS
K-450LU	450	9.0	13.2	9.8	14.3	1.8	8.0	124		
K-550LU	550	9.0	13.2	9.8	14.3	1.8	8.0	155		
K-610LU	610	9.0	13.2	9.8	14.3	1.8	8.0	175		
K-710LU	710	9.0	13.2	9.8	14.3	1.8	8.0	207		
K-780LU	776	9.0	13.2	9.8	14.3	1.8	8.0	228		
K-810LU	812	9.0	13.2	9.8	14.3	1.8	8.0	239		
K-920LU	920	9.0	13.2	9.8	14.3	1.8	8.0	274		
K-1020LU	1020	9.0	13.2	9.8	14.3	1.8	8.0	306		
K-1220LU	1220	9.0	13.2	9.8	14.3	1.8	8.0	367		