


NON-INSULATED COPPER TUBULAR LUGS (TLKF SERIES)

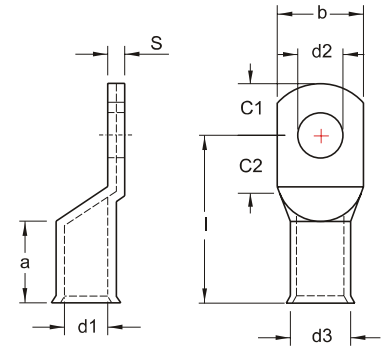

MAXIMUM ELECTRIC CURRENT:

A.W.G.	12	10	8	6	4	2
AMP.	35	50	70	95	125	170

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION mm									CRIMPING TOOL	Q'TY BOX
		a	b	C1	C2	d1	d2	d3	I	S		
12-10 A.W.G. 6 mm ²	TLKF6-5	9	10	6.5	7.5	3.5	5.5	6.5	21	2.4	K.S. MODEL LY-2045D WITH DIE INDEX NO.: 5.5	500
	TLKF6-6		12				6.4			1.9		500
	TLKF6-8		15	10	10		8.4		23	1.5		500
	TLKF6-10		17	12	12		10.5		25	1.3		500
	TLKF6-12		19	13	13		13.0		28	1.2		500
8 A.W.G. 10 mm ²	TLKF10-5	10	12	6.5	7.5	4.5	5.5	7.0	22	1.8	K.S. MODEL LY-2045D WITH DIE INDEX NO.: 8	500
	TLKF10-6		15				6.4			1.5		500
	TLKF10-8		17	10	10		8.4		25	1.3		500
	TLKF10-10		19	12	12		10.5		27	1.1		500
	TLKF10-12		21	13	13		13.0		29	1.1		500
6 A.W.G. 16 mm ²	TLKF16-5	13	12	5.5	6.5	5.5	5.5	8.5	26	2.8	NOVOPRESS MODEL HPM400	250
	TLKF16-6		15	6.25	7.5		6.4		27			250
	TLKF16-8		17	8.5	9.5		8.4		29	2.1		250
	TLKF16-10		19	10.5	11.5		10.5		31	2.0		250
	TLKF16-12		21	12	13		13.0		33	1.5		250
4 A.W.G. 25 mm ²	TLKF25-5	15	14	7.5	7.5	7.0	5.5	10.0	30	2.8	NOVOPRESS MODEL HPM400	200
	TLKF25-6		16				6.4		32	2.4		200
	TLKF25-8		18	10	10		8.4		34	2.2		200
	TLKF25-10		19	12	12		10.5		35	2.1		200
	TLKF25-12		21	13	13		13.0		37	2.1		200
	TLKF25-14		23	14.5	14.5		15.0		39	1.9		200
2 A.W.G. 35 mm ²	TLKF35-6	17	17	7.5	7.5	8.5	6.5	12.0	32	3.2	NOVOPRESS MODEL HPM400	100
	TLKF35-8		19	10	10		8.5		34			100