


FAG

UCP206

Plummer block housing unit

Plummer block housing units UCP, cast iron housing, with long base, radial insert ball bearing with grub screws in inner ring, RSR seals

Thông số kĩ thuật

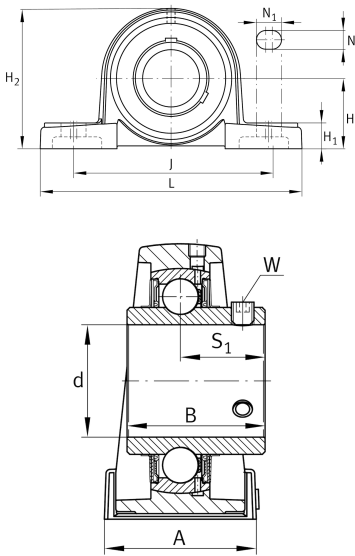

Mẫu mã sản phẩm hiện tại của bạn

Material	GG	Grey cast iron
Housing clearance	J7	Normal swivel torque

Main Dimensions & Performance Data

d	30 mm	Bore diameter
L	165 mm	Length total
H ₂	83 mm	Height
C _r	20,700 N	Basic dynamic load rating, radial
C _{0r}	11,300 N	Basic static load rating, radial
C _{ur}	590 N	Fatigue load limit, radial
≈m	1.349 kg	Trọng lượng

Mounting dimensions

J	121 mm	Distance fixing bore
N	17 mm	Width (slot)
N ₁	21 mm	Length (slot)



Dimensions

H	42.9 mm	Distance shaft axis
A	48 mm	Width (base)
H ₁	17 mm	Height (base)
B	38.1 mm	Width
S ₁	22.2 mm	Distance of raceway to locking collar
Q	M6	Connection thread for lubrication

Additional information

P206	Housing
UC206	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.