




Nylon Cable Tie

## 7.2 Ladder

### 7.2.1 Standard |

Temperature resistance: -80°C to 538°C  
Resistance against chemicals: ACID and ALKALI resistant  
MaterialA: 316 stainless steel

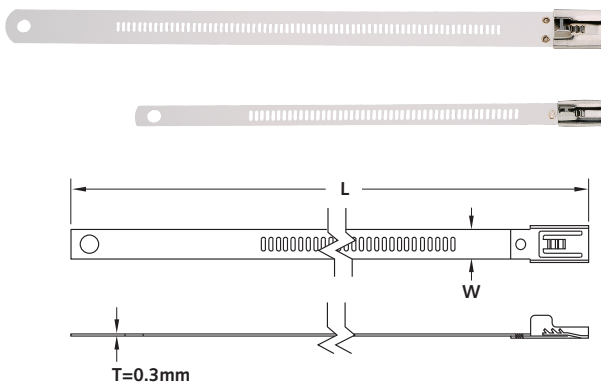

ITEM NO.	Max Bundle Dia (mm)	"L" Length Approx. (mm)	"W" Width Approx. (mm)	Min Loop Tensile (Kg)	PACKING BAG
STL-150S	22	150	7.0	113.4	100 PCS
STL-195S	45	195	7.0	113.4	100 PCS
STL-255S	64	255	7.0	113.4	100 PCS
STL-335S	89	335	7.0	113.4	100 PCS
STL-490S	139	490	7.0	113.4	100 PCS
STL-635S	185	635	7.0	113.4	100 PCS
STL-150M	22	150	12.0	113.4	100 PCS
STL-195M	45	195	12.0	113.4	100 PCS
STL-255M	64	255	12.0	113.4	100 PCS
STL-335M	89	335	12.0	113.4	100 PCS
STL-490M	139	490	12.0	113.4	100 PCS
STL-635M	185	635	12.0	113.4	100 PCS


Fastener

Marker , Pipe

Wire Duct

### 7.2.2 coating |

Temperature resistance: -40°C to 120°C  
Resistance against chemicals: ACID and ALKALI resistant  
MaterialA: 316 stainless steel coated with black NYLON 11

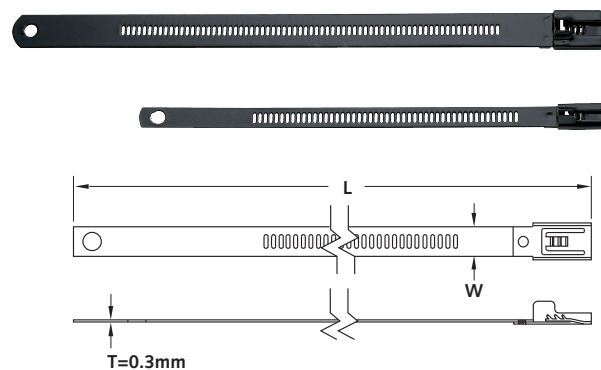

ITEM NO.	Max Bundle Dia (mm)	"L" Length Approx. (mm)	"W" Width Approx. (mm)	Min Loop Tensile (Kg)	PACKING BAG
STLC-150S	22	150	7.0	113.4	100 PCS
STLC-195S	45	195	7.0	113.4	100 PCS
STLC-255S	64	255	7.0	113.4	100 PCS
STLC-335S	89	335	7.0	113.4	100 PCS
STLC-490S	139	490	7.0	113.4	100 PCS
STLC-635S	185	635	7.0	113.4	100 PCS
STLC-150M	22	150	12.0	113.4	100 PCS
STLC-195M	45	195	12.0	113.4	100 PCS
STLC-255M	64	255	12.0	113.4	100 PCS
STLC-335M	89	335	12.0	113.4	100 PCS
STLC-490M	139	490	12.0	113.4	100 PCS
STLC-635M	185	635	12.0	113.4	100 PCS

PVC Tubes

Cable Clamp & Clip

Stainless Steel Cable Tie