




Nylon Cable Tie

1.1.3 Resistance Heat Type

Material: PA66 (Ultraviolet)
Flammability rating: UL94V-2
Color: Black
Operating Temp., °C (°F): -20°C to +120°C
Min. Install. Temp., C (F): 0°C

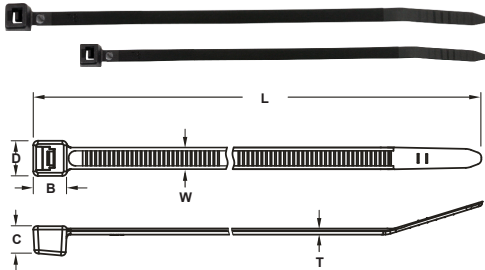


ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
K-80MRH	80	2.5	4.5	3.8	4.5	1	1.6	15	18	100 PCS
※ K-90MRH	96	2.5	4.5	3.8	4.5	1	1.6	21	18	100 PCS
K-100MRH	100	2.5	4.5	3.8	4.5	1	1.6	22	18	100 PCS
K-120MRH	120	2.5	4.5	3.8	4.5	1.1	1.6	28	18	100 PCS
K-140IRH	142	3.6	6.7	5.4	6.8	1.25	2.5	33	40	100 PCS
K-150IRH	150	3.6	6.7	5.4	6.8	1.25	2.5	35	40	100 PCS
※ K-180IRH	180	3.6	6.7	5.4	6.8	1.3	2.5	44	40	100 PCS
K-200IRH	203	3.6	6.7	5.4	6.8	1.3	2.5	52	40	100 PCS
K-200SRH	203	4.6	7.0	6.0	7.7	1.3	3.0	50	50	100 PCS
※ K-250SRH	250	4.6	7.0	6.0	7.7	1.35	3.0	65	50	100 PCS
※ K-280SRH	280	4.6	7.0	6.0	7.7	1.35	3.0	75	50	100 PCS
K-300SRH	300	4.6	7.4	6.0	8.3	1.4	3.0	80	50	100 PCS

※ : DEVELOPING ON DEMAND

Fastener

1.2 Mounting Cable Ties

Material: PA66
Flammability rating: UL94V-2

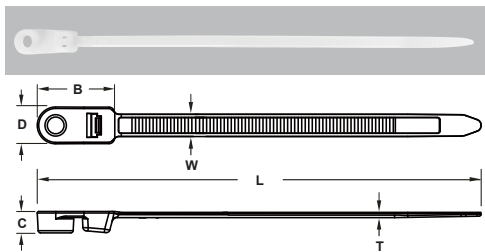

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KM4-150I	150	3.6	20.1	4.5	8.1	1.25	2.5	32	40	100 PCS
KM5-200S	216	4.8	20.9	5.6	9.9	1.3	3.0	50	50	100 PCS
KM5-300S	310	4.8	20.9	5.6	9.9	1.3	3.0	80	50	100 PCS
KM5-370S	377	4.8	20.9	5.6	9.9	1.35	3.0	102	50	100 PCS
KM5-300H	313	7.6	26.4	7.3	12.4	1.8	4.8	76	120	100 PCS


Marker, Pipe

Wire Duct

1.3 Releasable Cable Ties

1.3.1 Releasable Cable Ties

Material: PA66
Flammability rating: UL94V-2

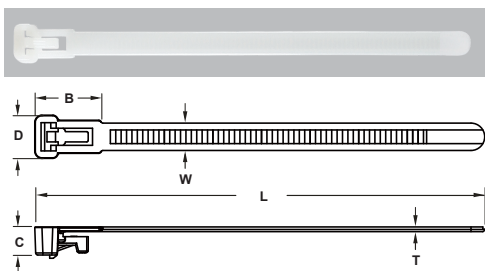


ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KR-125H	125	7.6	11.0	6.8	12.3	1.3	4.8	30	50	100 PCS
KR-150H	150	7.6	11.0	6.8	12.3	1.3	4.8	35	50	100 PCS
KR-200H	200	7.6	11.0	6.8	12.3	1.3	4.8	50	50	100 PCS
KR-250H	250	7.6	11.0	6.8	12.3	1.3	4.8	65	50	100 PCS
KRA-250H	250	7.6	11.0	6.8	12.3	1.3	4.8	65	50	100 PCS
KR-300H	300	7.6	11.0	6.8	12.3	1.3	4.8	80	50	100 PCS
KR-370H	370	7.6	11.0	6.8	12.3	1.3	4.8	108	50	100 PCS

PVC Tubes

Cable Clamp & Clip

Material: PA66
Flammability rating: UL94V-2

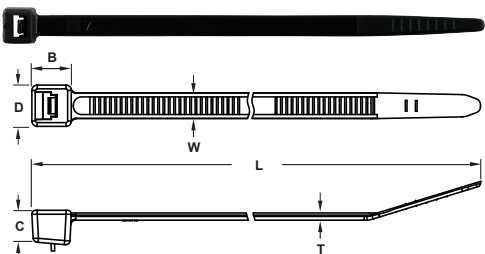

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KRPA-200S	198	4.8	7.0	5.8	7.7	1.35	3.0	55	50	100 PCS
KRPA-250S	247.5	4.8	7.0	5.8	7.7	1.35	3.0	74	50	100 PCS
KRPA-300S	298	4.8	7.0	5.8	7.7	1.45	3.0	80	50	100 PCS
KRPA-370S	368	4.8	7.0	5.8	7.7	1.45	3.0	102	50	100 PCS
KRPA-450L	450	9.0	13.2	9.8	14.3	1.8	9.0	124	175	100 PCS

Stainless Steel Cable Tie